


# Temperature Indicator K3HB-H

CSM\_K3HB-H\_DS\_E\_13\_2

## New High-speed, High-precision Temperature Indicator



- Visual confirmation of judgement results through display colors that switch between red and green. \*1
- Capable of high-speed sampling at 50 times per second (20 ms).
- High-resolution of 0.01°C with platinum-resistance thermometer Pt100 input. Thermocouple sensor inputs also support a resolution of 0.1°C for all ranges.
- Temperature input shift is easily set using two points.

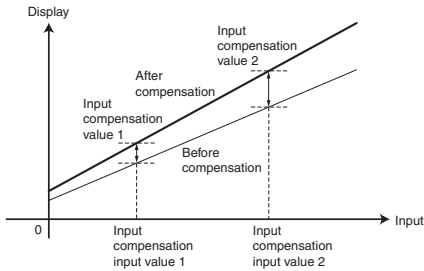

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

- Series expanded to include DeviceNet models. \*2
- UL certification approval (Certification Mark License).
- CE Marking conformance by third party assessment body.
- Water-resistant enclosure conforms to NEMA 4X (equivalent to IP66).

\*1 Visual confirmation of judgement results is not supported on models that do not have an output or models that do not support DeviceNet. You can change the display color by setting it, but you cannot switch it based on the judgement results.

\*2 DeviceNet models have a depth of 97 mm.

Refer to *Safety Precautions for All Digital Panel Meters.*

## Model Number Structure

### Model Number Legend

Base Units and Optional Boards can be ordered individually or as sets.

#### Base Units

K3HB-H    
1 5

#### 1. Input Sensor Code

TA: Temperature input  
Thermocouple input/Platinum-resistance thermometer input

#### 5. Supply Voltage

100-240 VAC: 100 to 240 VAC  
24 VAC/VDC: 24 VAC/VDC

#### Base Units with Optional Boards

K3HB-H       
1 2 3 4 5

#### 2. Sensor Power Supply/Output Type Code

- None: None  
CPA: Relay output (PASS: SPDT) + Sensor power supply (12 VDC +/-10%, 80 mA) (See note 1.)  
L1A: Linear current output (0 to 20 or 4 to 20 mA DC) + Sensor power supply (12 VDC +/-10%, 80 mA) (See note 2.)  
L2A: Linear voltage output (0 to 5, 1 to 5, or 0 to 10 VDC) + Sensor power supply (12 VDC +/-10%, 80 mA) (See note 2.)  
A: Sensor power supply (12 VDC +/-10%, 80 mA)  
FLK1A: Communications (RS-232C) + Sensor power supply (12 VDC +/-10%, 80 mA) (See note 2.)  
FLK3A: Communications (RS-485) + Sensor power supply (12 VDC +/-10%, 80 mA) (See note 2.)

- Note:** 1. CPA can be combined with relay outputs only.  
2. Only one of the following can be used by each Digital Indicator: RS-232C/RS-485 communications, a linear output, or DeviceNet communications.

#### 3. Relay/Transistor Output Type Code

- None: None  
C1: Relay contact (H/L: SPDT each)  
C2: Relay contact (HH/H/LL/L: SPST-NO each)  
T1: Transistor (NPN open collector: HH/H/PASS/L/LL)  
T2: Transistor (PNP open collector: HH/H/PASS/L/LL)  
BCD \*: BCD output + transistor output (NPN open collector: HH/H/PASS/L/LL)  
DRT: DeviceNet (See note 2.)  
\* A Special BCD Output Cable (sold separately) is required.

#### 4. Event Input Type Code

- None: None  
1: 5 inputs (M3 terminal blocks), NPN open collector  
2: 8 inputs (10-pin MIL connector), NPN open collector  
3: 5 inputs (M3 terminal blocks), PNP open collector  
4: 8 inputs (10-pin MIL connector), PNP open collector

### Optional Boards

#### Sensor Power Supply/Output Boards

K33-  
2

#### Relay/Transistor Output Boards

K34-  
3

#### Event Input Boards

K35-  
4

- Note:** The following combinations are not possible.
- Communications (FLK□A) + DeviceNet (DRT)
  - Communications (FLK□A) + BCD output (BCD)
  - Linear current/voltage (L□A) + DeviceNet (DRT)

## Accessories (Sold Separately)

K32-DICN: Special Cable (for event inputs, with 8-pin connector)

K32-BCD: Special BCD Output Cable

### Watertight Cover

Model
Y92A-49N

### Rubber Packing

Model
K32-P1

**Note:** Rubber packing is provided with the Controller.

## Specifications

### ■ Ratings

<b>Power supply voltage</b>	100 to 240 VAC (50/60 Hz), 24 VAC/VDC, DeviceNet power supply: 24 VDC	
<b>Allowable power supply voltage range</b>	85% to 110% of the rated power supply voltage, DeviceNet power supply: 11 to 25 VDC	
<b>Power consumption (See note 1.)</b>	100 to 240 V: 18 VA max. (max. load) 24 VAC/DC: 11 VA/7 W max. (max. load)	
<b>Current consumption</b>	DeviceNet power supply: 50 mA max. (24 VDC)	
<b>Input</b>	Platinum-resistance thermometer: Pt100 Thermocouple: K, J, T, E, L, U, N, R, S, B, W	
<b>A/D conversion method</b>	Delta-Sigma method	
<b>External power supply</b>	See Sensor Power Supply/Output Type Codes	
<b>Event inputs (See note 2.)</b>	<b>Timing input</b>	NPN open collector or no-voltage contact signal ON residual voltage: 3 V max. ON current at 0 Ω: 17 mA max. Max. applied voltage: 30 VDC max. OFF leakage current: 1.5 mA max.
	<b>Startup compensation timer input</b>	NPN open collector or no-voltage contact signal ON residual voltage: 2 V max. ON current at 0 Ω: 4 mA max.
	<b>Hold input</b>	Max. applied voltage: 30 VDC max.
	<b>Reset input</b>	OFF leakage current: 0.1 mA max.
<b>Output ratings (depends on the model)</b>	<b>Relay output</b>	250 VAC, 30 VDC, 5 A (resistive load) Mechanical life expectancy: 5,000,000 operations, Electrical life expectancy: 100,000 operations
	<b>Transistor output</b>	Maximum load voltage: 24 VDC, Maximum load current: 50 mA, Leakage current: 100 μA max.
	<b>Linear output</b>	Linear output 0 to 20 mA DC, 4 to 20 mA DC: Load: 500 Ω max, Resolution: Approx. 10,000, Output error: ±0.5% FS Linear output 0 to 5 VDC, 1 to 5 VDC, 0 to 10 VDC: Load: 5 kΩ max, Resolution: Approx. 10,000, Output error: ±0.5% FS (1 V or less: ±0.15 V; not output for 0 V or less)
<b>Display method</b>	Negative LCD (backlit LED) display 7-segment digital display (Character height: PV: 14.2 mm (green/red); SV: 4.9 mm (green))	
<b>Main functions</b>	Temperature input shift, measurement operation selection, averaging, previous average value comparison, zero-limit, output hysteresis, output OFF delay, output test, display value selection, display color selection, key protection, bank selection, display refresh period, maximum/minimum hold, reset	
<b>Ambient operating temperature</b>	-10 to 55°C (with no icing or condensation)	
<b>Ambient operating humidity</b>	25% to 85%	
<b>Storage temperature</b>	-25 to 65°C (with no icing or condensation)	
<b>Altitude</b>	2,000 m max.	
<b>Accessories</b>	Watertight packing, 2 fixtures, terminal cover, unit stickers, instruction manual. DeviceNet models also include a DeviceNet connector (Hirose HR31-5.08P-5SC(01)) and crimp terminals (Hirose HR31-SC-121) (See note 3.)	

**Note: 1.** DC power supply models require a control power supply capacity of approximately 1 A per Unit when power is turned ON. Particular attention is required when using two or more DC power supply models. The OMRON S8VS-series DC Power Supply Unit is recommended.

**2.** PNP input types are also available.

**3.** For K3HB-series DeviceNet models, use only the DeviceNet Connector included with the product. The crimp terminals provided are for Thin Cables.

## ■ Characteristics

<b>Display range</b>	-19,999 to 99,999	
<b>Accuracy</b>	Thermocouple input: ( $\pm 0.3\%$ PV or $\pm 1^\circ\text{C}$ , whichever is larger) $\pm 1$ digit max. (See note.) Platinum resistance thermometer input: ( $\pm 0.2\%$ PV or $\pm 0.8^\circ\text{C}$ , whichever is larger) $\pm 1$ digit max.	
<b>Sampling period</b>	20 ms (50 times/second)	
<b>Comparative output response time</b>	Platinum-resistance thermometer input range: 120 ms max. Thermocouple input range: 180 ms max. (The time until the comparative output is output when there is a forced sudden change in the input signal from 15% to 95% or 95% to 15%.)	
<b>Linear output response time</b>	Platinum-resistance thermometer input range: 170 ms max. Thermocouple input range: 230 ms max. (The time until the final analog output is reached when there is a forced sudden change in the output signal from 15% to 95% or 95% to 15%.)	
<b>Insulation resistance</b>	20 M $\Omega$ min. (at 500 VDC)	
<b>Dielectric strength</b>	2,300 VAC for 1 min between external terminals and case	
<b>Noise immunity</b>	100 to 240 VAC models: $\pm 1,500$ V at power supply terminals in normal or common mode (waveform with 1-ns rising edge and pulse width of 1 $\mu\text{s}/100$ ns) 24 VAC/VDC models: $\pm 1,500$ V at power supply terminals in normal or common mode (waveform with 1-ns rising edge and pulse width of 1 $\mu\text{s}/100$ ns)	
<b>Vibration resistance</b>	Frequency: 10 to 55 Hz; Acceleration: 50 m/s <sup>2</sup> , 10 sweeps of 5 min each in X, Y, and Z directions	
<b>Shock resistance</b>	150 m/s <sup>2</sup> (100 m/s <sup>2</sup> for relay outputs) 3 times each in 3 axes, 6 directions	
<b>Weight</b>	Approx. 300 g (Base Unit only)	
<b>Degree of protection</b>	<b>Front panel</b>	Conforms to NEMA 4X for indoor use (equivalent to IP66)
	<b>Rear case</b>	IP20
	<b>Terminals</b>	IP00 + finger protection (VDE0106/100)
<b>Memory protection</b>	EEPROM (non-volatile memory) Number of rewrites: 100,000	
<b>Applicable standards</b>	UL61010-1, CSA C22.2 No. 61010-1-04 EN61010-1 (IEC61010-1): Pollution degree 2/Overvoltage category II EN61326-1	
<b>EMC</b>	EMI: EN61326-1 Industrial electromagnetic environment Electromagnetic radiation interference CISPR 11 Group 1, Class A Terminal interference voltage CISPR 11 Group 1, Class A EMS: EN61326-1 Industrial electromagnetic environment Electrostatic Discharge Immunity EN61000-4-2: 4 kV (contact), 8 kV (in air) Radiated Electromagnetic Field Immunity EN61000-4-3: 10 V/m 1 kHz sine wave amplitude modulation (80 MHz to 1 GHz, 1.4 to 2 GHz) Electrical Fast Transient/Burst Immunity EN61000-4-4: 2 kV (power line), 1 kV (I/O signal line) Surge Immunity EN61000-4-5: 1 kV with line (power line), 2 kV with ground (power line) Conducted Disturbance Immunity EN61000-4-6: 3 V (0.15 to 80 MHz) Power Frequency Magnetic Immunity EN61000-4-8: 30 A/m (50 Hz) continuous time Voltage Dips and Interruptions Immunity EN61000-4-11: 0.5 cycle, 0°/180°, 100% (rated voltage)	

**Note:** K, T, N ( $-100^\circ\text{C}$  or less):  $\pm 2^\circ\text{C} \pm 1$  digit max.

U, L:  $\pm 2^\circ\text{C} \pm 1$  digit max.

B (400°C max.): Nothing specified.

R, S (200°C max.):  $\pm 3^\circ\text{C} \pm 1$  digit max.

W: ( $\pm 0.3\%$  PV or  $\pm 3^\circ\text{C}$  whichever is larger)  $\pm 1$  digit max.



# Common Specifications

## Event Input Ratings

Input type	S-TMR, HOLD, RESET, ZERO, BANK1, BANK2, BANK4	TIMING
Contact	ON: 1 k $\Omega$ max., OFF: 100 k $\Omega$ min.	---
No-contact	ON residual voltage: 2 V max. OFF leakage current: 0.1 mA max. Load current: 4 mA max. Maximum applied voltage: 30 VDC max.	ON residual voltage: 3 V max. OFF leakage current: 1.5 mA max. Load current: 17 mA max. Maximum applied voltage: 30 VDC max.

## Output Ratings

### Contact Output

Item	Resistive loads (250 VAC, $\cos\phi=1$ ; 30 VDC, L/R=0 ms)	Inductive loads (250 VAC, closed circuit, $\cos\phi=0.4$ ; 30 VDC, L/R=7 ms)
Rated load	5 A at 250 VAC 5 A at 30 VDC	1 A at 250 VAC 1 A at 30 VDC
Mechanical life expectancy	5,000,000 operations	
Electrical life expectancy	100,000 operations	

### Transistor Output

Maximum load voltage	24 VDC
Maximum load current	50 mA
Leakage current	100 $\mu$ A max.

### Linear Output

Item	0 to 20 mA	4 to 20 mA	0 to 5 V	1 to 5 V	0 to 10 V
Allowable load impedance	500 $\Omega$ max.		5 k $\Omega$ min.		
Resolution	Approx. 10,000				
Output error	$\pm 0.5\%$ FS		$\pm 0.5\%$ FS (1 V or less: $\pm 0.15$ V; not output for 0 V or less)		

### Serial Communications Output

Item	RS-232C, RS-485
Communications method	Half duplex
Synchronization method	Start-stop synchronization
Baud rate	9,600, 19,200, or 38,400 bps
Transmission code	ASCII
Data length	7 bits or 8 bits
Stop bit length	2 bits or 1 bit
Error detection	Vertical parity and FCS
Parity check	Odd, even

**Note:** For details on serial and DeviceNet communications, refer to the *Digital Indicator K3HB Communications User's Manual* (Cat.No. N129).

### BCD Output I/O Ratings (Input Signal Logic: Negative)


I/O signal name		Item	Rating	
Inputs	REQUEST	Input signal	No-voltage contact input	
	HOLD	Input current for no-voltage input	10 mA	
	MAX	Signal level	ON voltage	1.5 V max.
	MIN		OFF voltage	3 V min.
RESET				
Outputs	DATA	Maximum load voltage	24 VDC	
	POLARITY	Maximum load current	10 mA	
	OVER	Leakage current	100 $\mu$ A max.	
	DATA VALID			
	RUN			
	HH	Maximum load voltage	24 VDC	
H	Maximum load current			
PASS		50 mA		
L	Leakage current			
LL		100 $\mu$ A max.		

**Note:** For details on serial and DeviceNet communications, refer to the *Digital Indicator K3HB Communications User's Manual* (Cat.No. N129).

## DeviceNet Communications


<b>Communications protocol</b>	Conforms to DeviceNet																		
<b>Supported communications</b>	<b>Remote I/O communications</b>	Master-Slave connection (polling, bit-strobe, COS, cyclic) Conforms to DeviceNet communications standards.																	
	<b>I/O allocations</b>	Allocate any I/O data using the Configurator. Allocate any data, such as DeviceNet-specific parameters and variable area for Digital Indicators. Input area: 2 blocks, 60 words max. Output area: 1 block, 29 words max. (The first word in the area is always allocated for the Output Execution Enabled Flags.)																	
	<b>Message communications</b>	Explicit message communications CompoWay/F communications commands can be executed (using explicit message communications)																	
<b>Connection methods</b>	Combination of multi-drop and T-branch connections (for trunk and drop lines)																		
<b>Baud rate</b>	DeviceNet: 500, 250, or 125 Kbps (automatic follow-up)																		
<b>Communications media</b>	Special 5-wire cable (2 signal lines, 2 power supply lines, 1 shield line)																		
<b>Communications distance</b>	<table border="1"> <thead> <tr> <th>Baud rate</th> <th>Network length (max.)</th> <th>Drop line length (max.)</th> <th>Total drop line length (max.)</th> </tr> </thead> <tbody> <tr> <td>500 Kbps</td> <td>100 m (100 m)</td> <td>6 m</td> <td>39 m</td> </tr> <tr> <td>250 Kbps</td> <td>100 m (250 m)</td> <td>6 m</td> <td>78 m</td> </tr> <tr> <td>125 Kbps</td> <td>100 m (500 m)</td> <td>6 m</td> <td>156 m</td> </tr> </tbody> </table> <p>The values in parentheses are for Thick Cable.</p>			Baud rate	Network length (max.)	Drop line length (max.)	Total drop line length (max.)	500 Kbps	100 m (100 m)	6 m	39 m	250 Kbps	100 m (250 m)	6 m	78 m	125 Kbps	100 m (500 m)	6 m	156 m
Baud rate	Network length (max.)	Drop line length (max.)	Total drop line length (max.)																
500 Kbps	100 m (100 m)	6 m	39 m																
250 Kbps	100 m (250 m)	6 m	78 m																
125 Kbps	100 m (500 m)	6 m	156 m																
<b>Communications power supply</b>	24-VDC DeviceNet power supply																		
<b>Allowable voltage fluctuation range</b>	11 to 25-VDC DeviceNet power supply																		
<b>Current consumption</b>	50 mA max. (24 VDC)																		
<b>Maximum number of nodes</b>	64 (DeviceNet Configurator is counted as one node when connected)																		
<b>Maximum number of slaves</b>	63																		
<b>Error control checks</b>	CRC errors																		
<b>DeviceNet power supply</b>	Supplied from DeviceNet communications connector																		

## Internal Block Diagram

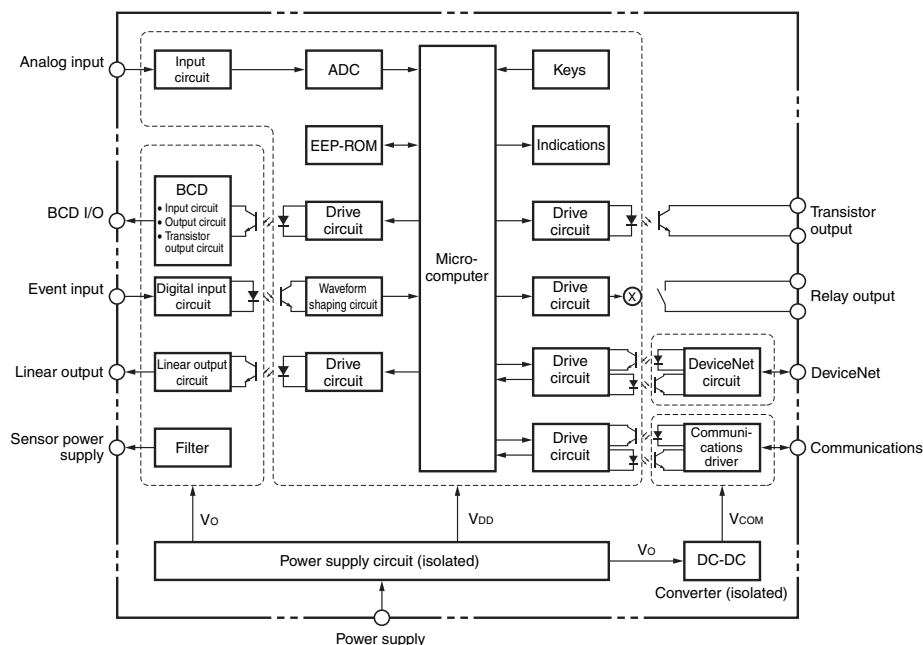


## Power Supply Derating Curve for Sensor (Reference Value)

With 12 V

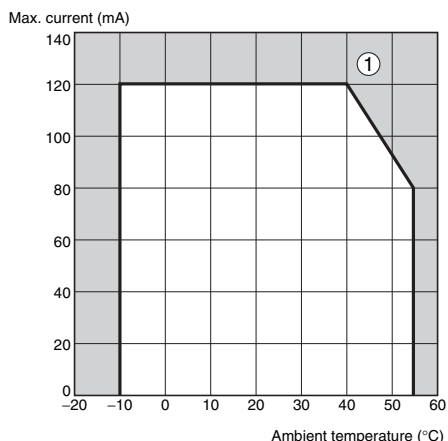

With 10 V

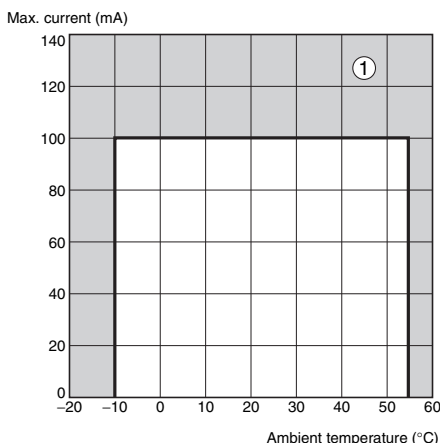

- Note:**
- The above values are for standard mounting. The derating curve differs depending on the mounting conditions.
  - Do not use the Sensor outside of the derating area (i.e., do not use it in the area labeled ① in the above graphics). Doing so may occasionally cause deterioration or damage to internal components.

## Component Names and Functions

### Max/Min status indicator

Turns ON when the maximum value or minimum value is displayed in the RUN level.

### Level/bank display

In RUN level, displays the bank if the bank function is ON. (Turns OFF if the bank function is OFF.)  
In other levels, displays the current level.

### Comparative output status indicators

Display the status of comparative outputs.

### Status indicators

Display	Function
Hold	Turns ON/OFF when hold input turns ON/OFF.

### PV display

Displays PVs, maximum values, minimum values, parameter names, and error names.

### Position meter

Displays the position of the PV with respect to a desired scale.

### SV display

Displays SV and monitor values.

### SV display status indicators

Display	Function
TG	Turns ON when the timing signal turns ON. Otherwise OFF.
HH, H, L, LL	In RUN level, turn ON when the comparative set values HH, H, L, and LL are displayed.



### MAX/MIN Key

Used to switch the display between the PV, maximum value, and minimum value and to reset the maximum and minimum values.

### LEVEL Key

Used to switch level.

### MODE Key

Used to switch the parameters displayed.

### SHIFT Key

Used to change parameter settings. When changing a set value, this key is used to move along the digits.


### UP Key

When changing a set value, this key is used to change the actual value.

## BCD Output Timing Chart


A REQUEST signal from a Programmable Controller or other external device is required to read BCD data.

### Single Sampling Data Output

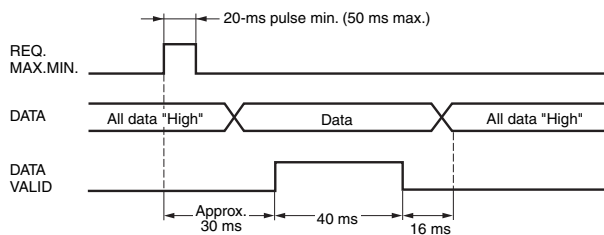



The data is set in approximately 30 ms from the rising edge of the REQUEST signal and the DATA VALID signal is output. When reading the data from a Programmable Controller, start reading the data when the DATA VALID signal turns ON. The DATA VALID signal will turn OFF 40 ms later, and the data will turn OFF 16 ms after that.

### Continuous Data Output

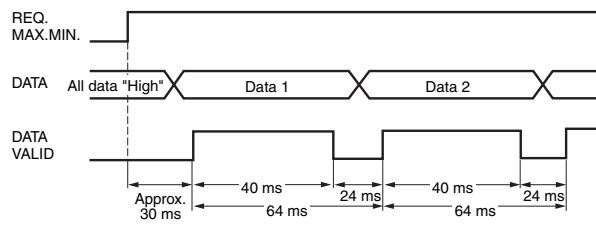


Measurement data is output every 64 ms while the REQUEST signal remains ON.

**Note:** If HOLD is executed when switching between data 1 and data 2, either data 1 or data 2 is output depending on the timing of the hold signal. The data will not go LOW.

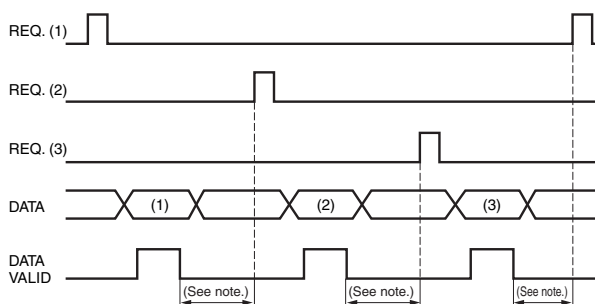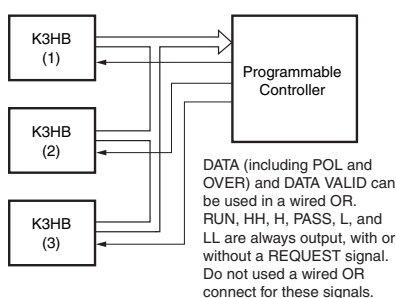


**Note:** Leave 20 ms min. between DATA VALID turning OFF and the REQUEST signal.

### Programmable Controller Connection Example

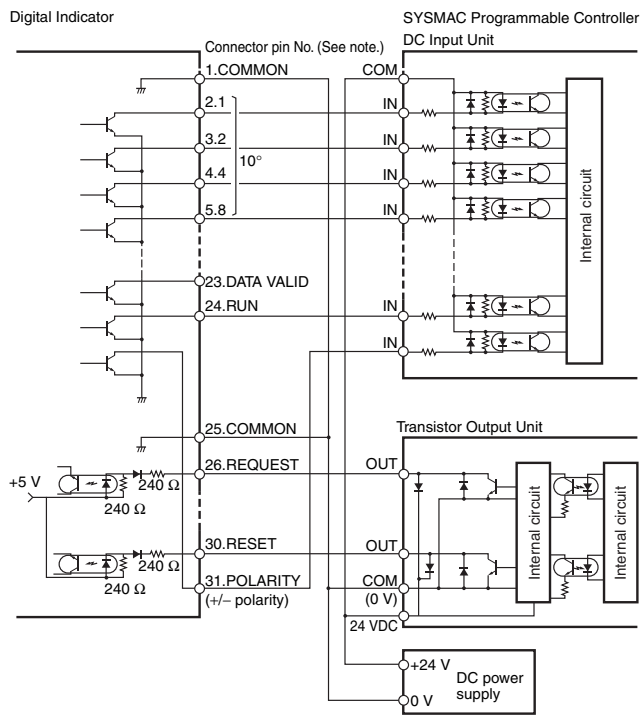

### Display Unit Connection Example

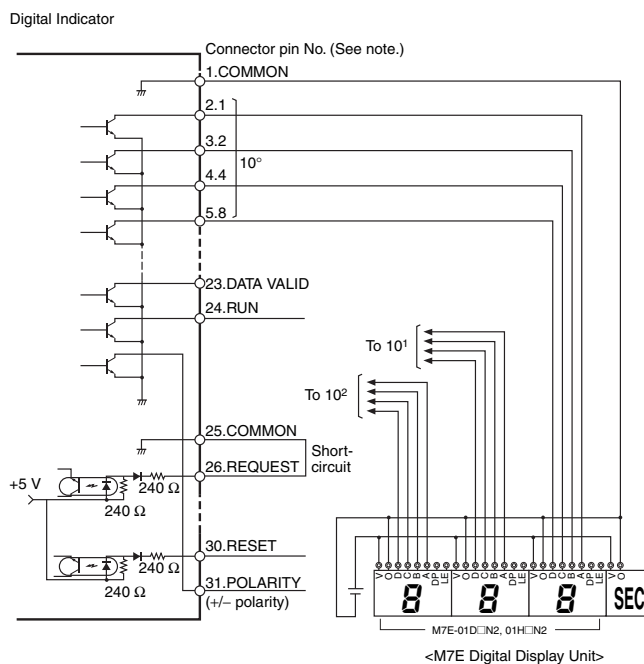




**Note:** The BCD output connector pin number is the D-sub connector pin number when the BCD Output Cable (sold separately) is connected. This number differs from the pin number for the Digital Indicator narrow pitch connector (manufactured by Honda Tsushin Kogyo Co., Ltd.).

Refer to the following User's Manual for application precautions and other information required when using the Digital Indicator:  
 K3HB-S/-X/-V/-H Digital Indicator User's Manual (Cat. No. N128)  
 The manual can be downloaded from the following site in PDF format: OMRON Industrial Web <http://www.fa.omron.co.jp>



# Connections

## Terminal Arrangement

**Note:** Insulation is used between signal input, event input, output, and power supply terminals.

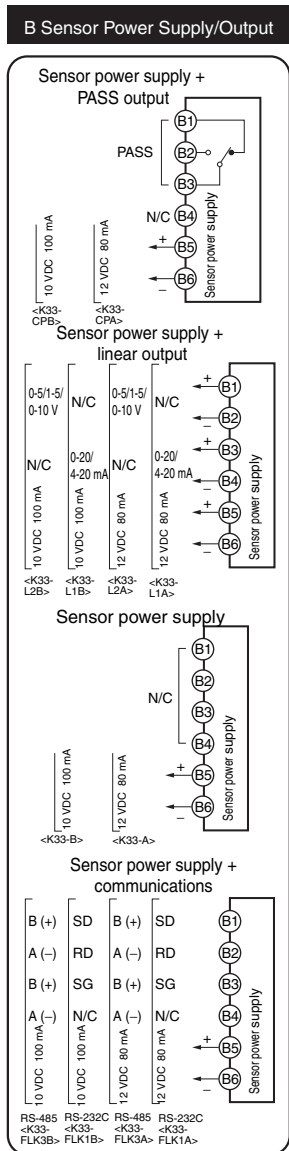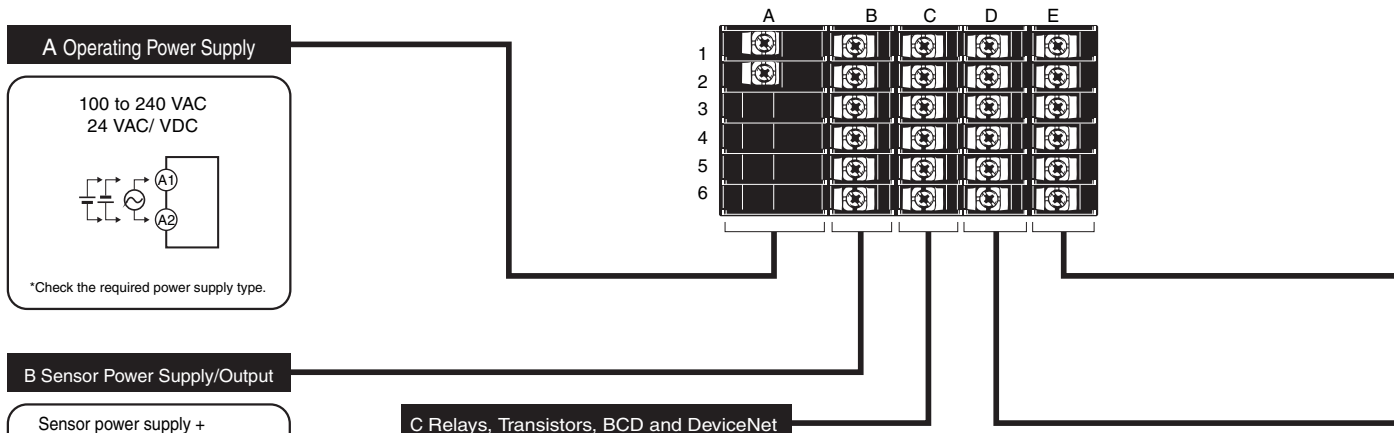


**C Relays, Transistors, BCD and DeviceNet**

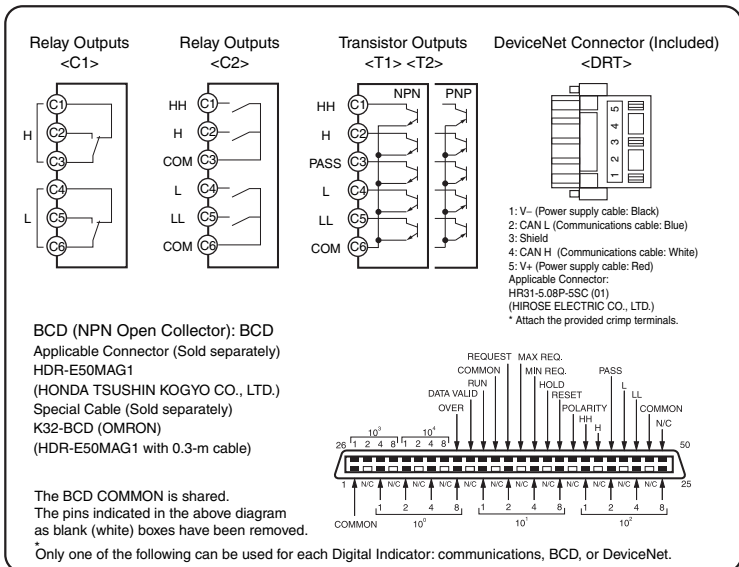


- Safety Standards Conformance**
- Always use a EN/IEC-compliant power supply with reinforced insulation or double insulation for the DeviceNet power supply.
  - The product must be used indoors for the above applicable standards to apply.
  - The K3HB-XVA□□ complies with UL standards when the applied input voltage is within the range 0 to 150 VAC.


**E Analog Input**

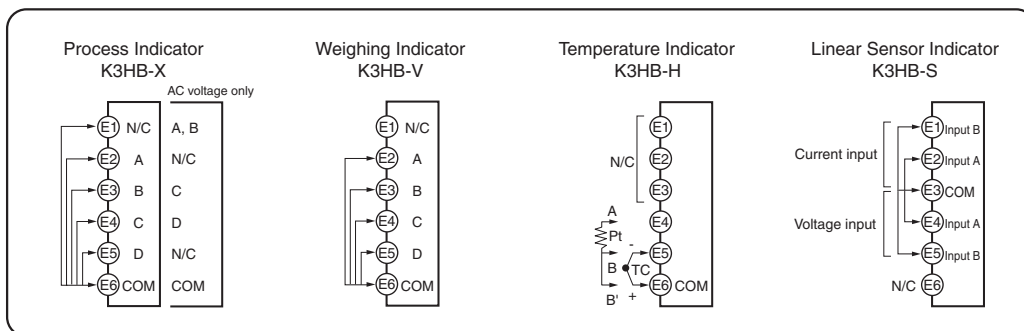

**D Event Input**

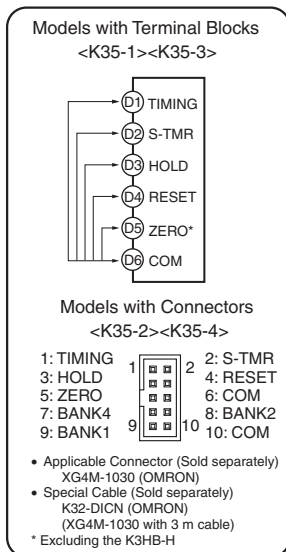

- Use terminal pin D6 as the common terminal.
- Use NPN open collector or no-voltage contacts for event input. PNP types are also available.

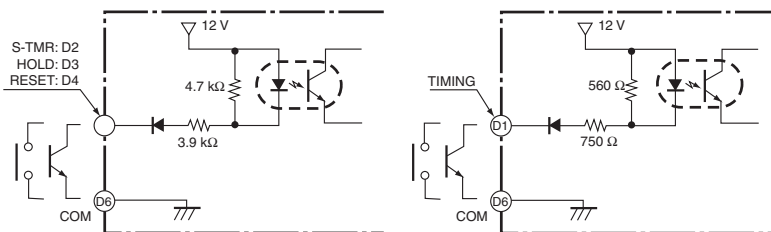

**BCD Output Cable**

Model	Shape	Pin arrangement
K32-BCD	<p>K3HB end: 38 mm</p> <p>Connected device end (PLC, display device, etc.): 46.5 mm</p> <p>Length: 300 mm</p> <p>Cover: HDR-E50LPA5 (manufactured by Honda Tsushin Co., Ltd.) Connector: HDR-E50MAG1 (manufactured by Honda Tsushin Co., Ltd.)</p> <p>D-sub connector (37-pin female) Cover: 17JE-37H-1A (manufactured by DDK) Connector: Equivalent to 17JE-13370-02 (manufactured by DDK) Stand: 17L-002A (manufactured by DDK)</p>	<p>COMMON — 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37</p> <p>Pin 1: COMMON</p> <p>Pin 2: 10<sup>0</sup></p> <p>Pin 3: 10<sup>1</sup></p> <p>Pin 4: 10<sup>2</sup></p> <p>Pin 5: 10<sup>3</sup></p> <p>Pin 6: 10<sup>4</sup></p> <p>Pin 7: 10<sup>5</sup></p> <p>Pin 8: 10<sup>6</sup></p> <p>Pin 9: 10<sup>7</sup></p> <p>Pin 10: 10<sup>8</sup></p> <p>Pin 11: 10<sup>9</sup></p> <p>Pin 12: 10<sup>0</sup></p> <p>Pin 13: 10<sup>1</sup></p> <p>Pin 14: 10<sup>2</sup></p> <p>Pin 15: 10<sup>3</sup></p> <p>Pin 16: 10<sup>4</sup></p> <p>Pin 17: 10<sup>5</sup></p> <p>Pin 18: 10<sup>6</sup></p> <p>Pin 19: 10<sup>7</sup></p> <p>Pin 20: 10<sup>8</sup></p> <p>Pin 21: 10<sup>9</sup></p> <p>Pin 22: 10<sup>0</sup></p> <p>Pin 23: 10<sup>1</sup></p> <p>Pin 24: 10<sup>2</sup></p> <p>Pin 25: 10<sup>3</sup></p> <p>Pin 26: 10<sup>4</sup></p> <p>Pin 27: 10<sup>5</sup></p> <p>Pin 28: 10<sup>6</sup></p> <p>Pin 29: 10<sup>7</sup></p> <p>Pin 30: 10<sup>8</sup></p> <p>Pin 31: 10<sup>9</sup></p> <p>Pin 32: 10<sup>0</sup></p> <p>Pin 33: 10<sup>1</sup></p> <p>Pin 34: 10<sup>2</sup></p> <p>Pin 35: 10<sup>3</sup></p> <p>Pin 36: 10<sup>4</sup></p> <p>Pin 37: 10<sup>5</sup></p> <p>Pin 38: 10<sup>6</sup></p> <p>Pin 39: 10<sup>7</sup></p> <p>Pin 40: 10<sup>8</sup></p> <p>Pin 41: 10<sup>9</sup></p> <p>Pin 42: 10<sup>0</sup></p> <p>Pin 43: 10<sup>1</sup></p> <p>Pin 44: 10<sup>2</sup></p> <p>Pin 45: 10<sup>3</sup></p> <p>Pin 46: 10<sup>4</sup></p> <p>Pin 47: 10<sup>5</sup></p> <p>Pin 48: 10<sup>6</sup></p> <p>Pin 49: 10<sup>7</sup></p> <p>Pin 50: 10<sup>8</sup></p> <p>Pin 51: 10<sup>9</sup></p> <p>Pin 52: 10<sup>0</sup></p> <p>Pin 53: 10<sup>1</sup></p> <p>Pin 54: 10<sup>2</sup></p> <p>Pin 55: 10<sup>3</sup></p> <p>Pin 56: 10<sup>4</sup></p> <p>Pin 57: 10<sup>5</sup></p> <p>Pin 58: 10<sup>6</sup></p> <p>Pin 59: 10<sup>7</sup></p> <p>Pin 60: 10<sup>8</sup></p> <p>Pin 61: 10<sup>9</sup></p> <p>Pin 62: 10<sup>0</sup></p> <p>Pin 63: 10<sup>1</sup></p> <p>Pin 64: 10<sup>2</sup></p> <p>Pin 65: 10<sup>3</sup></p> <p>Pin 66: 10<sup>4</sup></p> <p>Pin 67: 10<sup>5</sup></p> <p>Pin 68: 10<sup>6</sup></p> <p>Pin 69: 10<sup>7</sup></p> <p>Pin 70: 10<sup>8</sup></p> <p>Pin 71: 10<sup>9</sup></p> <p>Pin 72: 10<sup>0</sup></p> <p>Pin 73: 10<sup>1</sup></p> <p>Pin 74: 10<sup>2</sup></p> <p>Pin 75: 10<sup>3</sup></p> <p>Pin 76: 10<sup>4</sup></p> <p>Pin 77: 10<sup>5</sup></p> <p>Pin 78: 10<sup>6</sup></p> <p>Pin 79: 10<sup>7</sup></p> <p>Pin 80: 10<sup>8</sup></p> <p>Pin 81: 10<sup>9</sup></p> <p>Pin 82: 10<sup>0</sup></p> <p>Pin 83: 10<sup>1</sup></p> <p>Pin 84: 10<sup>2</sup></p> <p>Pin 85: 10<sup>3</sup></p> <p>Pin 86: 10<sup>4</sup></p> <p>Pin 87: 10<sup>5</sup></p> <p>Pin 88: 10<sup>6</sup></p> <p>Pin 89: 10<sup>7</sup></p> <p>Pin 90: 10<sup>8</sup></p> <p>Pin 91: 10<sup>9</sup></p> <p>Pin 92: 10<sup>0</sup></p> <p>Pin 93: 10<sup>1</sup></p> <p>Pin 94: 10<sup>2</sup></p> <p>Pin 95: 10<sup>3</sup></p> <p>Pin 96: 10<sup>4</sup></p> <p>Pin 97: 10<sup>5</sup></p> <p>Pin 98: 10<sup>6</sup></p> <p>Pin 99: 10<sup>7</sup></p> <p>Pin 100: 10<sup>8</sup></p> <p>Pin 101: 10<sup>9</sup></p> <p>Pin 102: 10<sup>0</sup></p> <p>Pin 103: 10<sup>1</sup></p> <p>Pin 104: 10<sup>2</sup></p> <p>Pin 105: 10<sup>3</sup></p> <p>Pin 106: 10<sup>4</sup></p> <p>Pin 107: 10<sup>5</sup></p> <p>Pin 108: 10<sup>6</sup></p> <p>Pin 109: 10<sup>7</sup></p> <p>Pin 110: 10<sup>8</sup></p> <p>Pin 111: 10<sup>9</sup></p> <p>Pin 112: 10<sup>0</sup></p> <p>Pin 113: 10<sup>1</sup></p> <p>Pin 114: 10<sup>2</sup></p> <p>Pin 115: 10<sup>3</sup></p> <p>Pin 116: 10<sup>4</sup></p> <p>Pin 117: 10<sup>5</sup></p> <p>Pin 118: 10<sup>6</sup></p> <p>Pin 119: 10<sup>7</sup></p> <p>Pin 120: 10<sup>8</sup></p> <p>Pin 121: 10<sup>9</sup></p> <p>Pin 122: 10<sup>0</sup></p> <p>Pin 123: 10<sup>1</sup></p> <p>Pin 124: 10<sup>2</sup></p> <p>Pin 125: 10<sup>3</sup></p> <p>Pin 126: 10<sup>4</sup></p> <p>Pin 127: 10<sup>5</sup></p> <p>Pin 128: 10<sup>6</sup></p> <p>Pin 129: 10<sup>7</sup></p> <p>Pin 130: 10<sup>8</sup></p> <p>Pin 131: 10<sup>9</sup></p> <p>Pin 132: 10<sup>0</sup></p> <p>Pin 133: 10<sup>1</sup></p> <p>Pin 134: 10<sup>2</sup></p> <p>Pin 135: 10<sup>3</sup></p> <p>Pin 136: 10<sup>4</sup></p> <p>Pin 137: 10<sup>5</sup></p> <p>Pin 138: 10<sup>6</sup></p> <p>Pin 139: 10<sup>7</sup></p> <p>Pin 140: 10<sup>8</sup></p> <p>Pin 141: 10<sup>9</sup></p> <p>Pin 142: 10<sup>0</sup></p> <p>Pin 143: 10<sup>1</sup></p> <p>Pin 144: 10<sup>2</sup></p> <p>Pin 145: 10<sup>3</sup></p> <p>Pin 146: 10<sup>4</sup></p> <p>Pin 147: 10<sup>5</sup></p> <p>Pin 148: 10<sup>6</sup></p> <p>Pin 149: 10<sup>7</sup></p> <p>Pin 150: 10<sup>8</sup></p> <p>Pin 151: 10<sup>9</sup></p> <p>Pin 152: 10<sup>0</sup></p> <p>Pin 153: 10<sup>1</sup></p> <p>Pin 154: 10<sup>2</sup></p> <p>Pin 155: 10<sup>3</sup></p> <p>Pin 156: 10<sup>4</sup></p> <p>Pin 157: 10<sup>5</sup></p> <p>Pin 158: 10<sup>6</sup></p> <p>Pin 159: 10<sup>7</sup></p> <p>Pin 160: 10<sup>8</sup></p> <p>Pin 161: 10<sup>9</sup></p> <p>Pin 162: 10<sup>0</sup></p> <p>Pin 163: 10<sup>1</sup></p> <p>Pin 164: 10<sup>2</sup></p> <p>Pin 165: 10<sup>3</sup></p> <p>Pin 166: 10<sup>4</sup></p> <p>Pin 167: 10<sup>5</sup></p> <p>Pin 168: 10<sup>6</sup></p> <p>Pin 169: 10<sup>7</sup></p> <p>Pin 170: 10<sup>8</sup></p> <p>Pin 171: 10<sup>9</sup></p> <p>Pin 172: 10<sup>0</sup></p> <p>Pin 173: 10<sup>1</sup></p> <p>Pin 174: 10<sup>2</sup></p> <p>Pin 175: 10<sup>3</sup></p> <p>Pin 176: 10<sup>4</sup></p> <p>Pin 177: 10<sup>5</sup></p> <p>Pin 178: 10<sup>6</sup></p> <p>Pin 179: 10<sup>7</sup></p> <p>Pin 180: 10<sup>8</sup></p> <p>Pin 181: 10<sup>9</sup></p> <p>Pin 182: 10<sup>0</sup></p> <p>Pin 183: 10<sup>1</sup></p> <p>Pin 184: 10<sup>2</sup></p> <p>Pin 185: 10<sup>3</sup></p> <p>Pin 186: 10<sup>4</sup></p> <p>Pin 187: 10<sup>5</sup></p> <p>Pin 188: 10<sup>6</sup></p> <p>Pin 189: 10<sup>7</sup></p> <p>Pin 190: 10<sup>8</sup></p> <p>Pin 191: 10<sup>9</sup></p> <p>Pin 192: 10<sup>0</sup></p> <p>Pin 193: 10<sup>1</sup></p> <p>Pin 194: 10<sup>2</sup></p> <p>Pin 195: 10<sup>3</sup></p> <p>Pin 196: 10<sup>4</sup></p> <p>Pin 197: 10<sup>5</sup></p> <p>Pin 198: 10<sup>6</sup></p> <p>Pin 199: 10<sup>7</sup></p> <p>Pin 200: 10<sup>8</sup></p> <p>Pin 201: 10<sup>9</sup></p> <p>Pin 202: 10<sup>0</sup></p> <p>Pin 203: 10<sup>1</sup></p> <p>Pin 204: 10<sup>2</sup></p> <p>Pin 205: 10<sup>3</sup></p> <p>Pin 206: 10<sup>4</sup></p> <p>Pin 207: 10<sup>5</sup></p> <p>Pin 208: 10<sup>6</sup></p> <p>Pin 209: 10<sup>7</sup></p> <p>Pin 210: 10<sup>8</sup></p> <p>Pin 211: 10<sup>9</sup></p> <p>Pin 212: 10<sup>0</sup></p> <p>Pin 213: 10<sup>1</sup></p> <p>Pin 214: 10<sup>2</sup></p> <p>Pin 215: 10<sup>3</sup></p> <p>Pin 216: 10<sup>4</sup></p> <p>Pin 217: 10<sup>5</sup></p> <p>Pin 218: 10<sup>6</sup></p> <p>Pin 219: 10<sup>7</sup></p> <p>Pin 220: 10<sup>8</sup></p> <p>Pin 221: 10<sup>9</sup></p> <p>Pin 222: 10<sup>0</sup></p> <p>Pin 223: 10<sup>1</sup></p> <p>Pin 224: 10<sup>2</sup></p> <p>Pin 225: 10<sup>3</sup></p> <p>Pin 226: 10<sup>4</sup></p> <p>Pin 227: 10<sup>5</sup></p> <p>Pin 228: 10<sup>6</sup></p> <p>Pin 229: 10<sup>7</sup></p> <p>Pin 230: 10<sup>8</sup></p> <p>Pin 231: 10<sup>9</sup></p> <p>Pin 232: 10<sup>0</sup></p> <p>Pin 233: 10<sup>1</sup></p> <p>Pin 234: 10<sup>2</sup></p> <p>Pin 235: 10<sup>3</sup></p> <p>Pin 236: 10<sup>4</sup></p> <p>Pin 237: 10<sup>5</sup></p> <p>Pin 238: 10<sup>6</sup></p> <p>Pin 239: 10<sup>7</sup></p> <p>Pin 240: 10<sup>8</sup></p> <p>Pin 241: 10<sup>9</sup></p> <p>Pin 242: 10<sup>0</sup></p> <p>Pin 243: 10<sup>1</sup></p> <p>Pin 244: 10<sup>2</sup></p> <p>Pin 245: 10<sup>3</sup></p> <p>Pin 246: 10<sup>4</sup></p> <p>Pin 247: 10<sup>5</sup></p> <p>Pin 248: 10<sup>6</sup></p> <p>Pin 249: 10<sup>7</sup></p> <p>Pin 250: 10<sup>8</sup></p> <p>Pin 251: 10<sup>9</sup></p> <p>Pin 252: 10<sup>0</sup></p> <p>Pin 253: 10<sup>1</sup></p> <p>Pin 254: 10<sup>2</sup></p> <p>Pin 255: 10<sup>3</sup></p> <p>Pin 256: 10<sup>4</sup></p> <p>Pin 257: 10<sup>5</sup></p> <p>Pin 258: 10<sup>6</sup></p> <p>Pin 259: 10<sup>7</sup></p> <p>Pin 260: 10<sup>8</sup></p> <p>Pin 261: 10<sup>9</sup></p> <p>Pin 262: 10<sup>0</sup></p> <p>Pin 263: 10<sup>1</sup></p> <p>Pin 264: 10<sup>2</sup></p> <p>Pin 265: 10<sup>3</sup></p> <p>Pin 266: 10<sup>4</sup></p> <p>Pin 267: 10<sup>5</sup></p> <p>Pin 268: 10<sup>6</sup></p> <p>Pin 269: 10<sup>7</sup></p> <p>Pin 270: 10<sup>8</sup></p> <p>Pin 271: 10<sup>9</sup></p> <p>Pin 272: 10<sup>0</sup></p> <p>Pin 273: 10<sup>1</sup></p> <p>Pin 274: 10<sup>2</sup></p> <p>Pin 275: 10<sup>3</sup></p> <p>Pin 276: 10<sup>4</sup></p> <p>Pin 277: 10<sup>5</sup></p> <p>Pin 278: 10<sup>6</sup></p> <p>Pin 279: 10<sup>7</sup></p> <p>Pin 280: 10<sup>8</sup></p> <p>Pin 281: 10<sup>9</sup></p> <p>Pin 282: 10<sup>0</sup></p> <p>Pin 283: 10<sup>1</sup></p> <p>Pin 284: 10<sup>2</sup></p> <p>Pin 285: 10<sup>3</sup></p> <p>Pin 286: 10<sup>4</sup></p> <p>Pin 287: 10<sup>5</sup></p> <p>Pin 288: 10<sup>6</sup></p> <p>Pin 289: 10<sup>7</sup></p> <p>Pin 290: 10<sup>8</sup></p> <p>Pin 291: 10<sup>9</sup></p> <p>Pin 292: 10<sup>0</sup></p> <p>Pin 293: 10<sup>1</sup></p> <p>Pin 294: 10<sup>2</sup></p> <p>Pin 295: 10<sup>3</sup></p> <p>Pin 296: 10<sup>4</sup></p> <p>Pin 297: 10<sup>5</sup></p> <p>Pin 298: 10<sup>6</sup></p> <p>Pin 299: 10<sup>7</sup></p> <p>Pin 300: 10<sup>8</sup></p> <p>Pin 301: 10<sup>9</sup></p> <p>Pin 302: 10<sup>0</sup></p> <p>Pin 303: 10<sup>1</sup></p> <p>Pin 304: 10<sup>2</sup></p> <p>Pin 305: 10<sup>3</sup></p> <p>Pin 306: 10<sup>4</sup></p> <p>Pin 307: 10<sup>5</sup></p> <p>Pin 308: 10<sup>6</sup></p> <p>Pin 309: 10<sup>7</sup></p> <p>Pin 310: 10<sup>8</sup></p> <p>Pin 311: 10<sup>9</sup></p> <p>Pin 312: 10<sup>0</sup></p> <p>Pin 313: 10<sup>1</sup></p> <p>Pin 314: 10<sup>2</sup></p> <p>Pin 315: 10<sup>3</sup></p> <p>Pin 316: 10<sup>4</sup></p> <p>Pin 317: 10<sup>5</sup></p> <p>Pin 318: 10<sup>6</sup></p> <p>Pin 319: 10<sup>7</sup></p> <p>Pin 320: 10<sup>8</sup></p> <p>Pin 321: 10<sup>9</sup></p> <p>Pin 322: 10<sup>0</sup></p> <p>Pin 323: 10<sup>1</sup></p> <p>Pin 324: 10<sup>2</sup></p> <p>Pin 325: 10<sup>3</sup></p> <p>Pin 326: 10<sup>4</sup></p> <p>Pin 327: 10<sup>5</sup></p> <p>Pin 328: 10<sup>6</sup></p> <p>Pin 329: 10<sup>7</sup></p> <p>Pin 330: 10<sup>8</sup></p> <p>Pin 331: 10<sup>9</sup></p> <p>Pin 332: 10<sup>0</sup></p> <p>Pin 333: 10<sup>1</sup></p> <p>Pin 334: 10<sup>2</sup></p> <p>Pin 335: 10<sup>3</sup></p> <p>Pin 336: 10<sup>4</sup></p> <p>Pin 337: 10<sup>5</sup></p> <p>Pin 338: 10<sup>6</sup></p> <p>Pin 339: 10<sup>7</sup></p> <p>Pin 340: 10<sup>8</sup></p> <p>Pin 341: 10<sup>9</sup></p> <p>Pin 342: 10<sup>0</sup></p> <p>Pin 343: 10<sup>1</sup></p> <p>Pin 344: 10<sup>2</sup></p> <p>Pin 345: 10<sup>3</sup></p> <p>Pin 346: 10<sup>4</sup></p> <p>Pin 347: 10<sup>5</sup></p> <p>Pin 348: 10<sup>6</sup></p> <p>Pin 349: 10<sup>7</sup></p> <p>Pin 350: 10<sup>8</sup></p> <p>Pin 351: 10<sup>9</sup></p> <p>Pin 352: 10<sup>0</sup></p> <p>Pin 353: 10<sup>1</sup></p> <p>Pin 354: 10<sup>2</sup></p> <p>Pin 355: 10<sup>3</sup></p> <p>Pin 356: 10<sup>4</sup></p> <p>Pin 357: 10<sup>5</sup></p> <p>Pin 358: 10<sup>6</sup></p> <p>Pin 359: 10<sup>7</sup></p> <p>Pin 360: 10<sup>8</sup></p> <p>Pin 361: 10<sup>9</sup></p> <p>Pin 362: 10<sup>0</sup></p> <p>Pin 363: 10<sup>1</sup></p> <p>Pin 364: 10<sup>2</sup></p> <p>Pin 365: 10<sup>3</sup></p> <p>Pin 366: 10<sup>4</sup></p> <p>Pin 367: 10<sup>5</sup></p> <p>Pin 368: 10<sup>6</sup></p> <p>Pin 369: 10<sup>7</sup></p> <p>Pin 370: 10<sup>8</sup></p> <p>Pin 371: 10<sup>9</sup></p> <p>Pin 372: 10<sup>0</sup></p> <p>Pin 373: 10<sup>1</sup></p> <p>Pin 374: 10<sup>2</sup></p> <p>Pin 375: 10<sup>3</sup></p> <p>Pin 376: 10<sup>4</sup></p> <p>Pin 377: 10<sup>5</sup></p> <p>Pin 378: 10<sup>6</sup></p> <p>Pin 379: 10<sup>7</sup></p> <p>Pin 380: 10<sup>8</sup></p> <p>Pin 381: 10<sup>9</sup></p> <p>Pin 382: 10<sup>0</sup></p> <p>Pin 383: 10<sup>1</sup></p> <p>Pin 384: 10<sup>2</sup></p> <p>Pin 385: 10<sup>3</sup></p> <p>Pin 386: 10<sup>4</sup></p> <p>Pin 387: 10<sup>5</sup></p> <p>Pin 388: 10<sup>6</sup></p> <p>Pin 389: 10<sup>7</sup></p> <p>Pin 390: 10<sup>8</sup></p> <p>Pin 391: 10<sup>9</sup></p> <p>Pin 392: 10<sup>0</sup></p> <p>Pin 393: 10<sup>1</sup></p> <p>Pin 394: 10<sup>2</sup></p> <p>Pin 395: 10<sup>3</sup></p> <p>Pin 396: 10<sup>4</sup></p> <p>Pin 397: 10<sup>5</sup></p> <p>Pin 398: 10<sup>6</sup></p> <p>Pin 399: 10<sup>7</sup></p> <p>Pin 400: 10<sup>8</sup></p> <p>Pin 401: 10<sup>9</sup></p> <p>Pin 402: 10<sup>0</sup></p> <p>Pin 403: 10<sup>1</sup></p> <p>Pin 404: 10<sup>2</sup></p> <p>Pin 405: 10<sup>3</sup></p> <p>Pin 406: 10<sup>4</sup></p> <p>Pin 407: 10<sup>5</sup></p> <p>Pin 408: 10<sup>6</sup></p> <p>Pin 409: 10<sup>7</sup></p> <p>Pin 410: 10<sup>8</sup></p> <p>Pin 411: 10<sup>9</sup></p> <p>Pin 412: 10<sup>0</sup></p> <p>Pin 413: 10<sup>1</sup></p> <p>Pin 414: 10<sup>2</sup></p> <p>Pin 415: 10<sup>3</sup></p> <p>Pin 416: 10<sup>4</sup></p> <p>Pin 417: 10<sup>5</sup></p> <p>Pin 418: 10<sup>6</sup></p> <p>Pin 419: 10<sup>7</sup></p> <p>Pin 420: 10<sup>8</sup></p> <p>Pin 421: 10<sup>9</sup></p> <p>Pin 422: 10<sup>0</sup></p> <p>Pin 423: 10<sup>1</sup></p> <p>Pin 424: 10<sup>2</sup></p> <p>Pin 425: 10<sup>3</sup></p> <p>Pin 426: 10<sup>4</sup></p> <p>Pin 427: 10<sup>5</sup></p> <p>Pin 428: 10<sup>6</sup></p> <p>Pin 429: 10<sup>7</sup></p> <p>Pin 430: 10<sup>8</sup></p> <p>Pin 431: 10<sup>9</sup></p> <p>Pin 432: 10<sup>0</sup></p> <p>Pin 433: 10<sup>1</sup></p> <p>Pin 434: 10<sup>2</sup></p> <p>Pin 435: 10<sup>3</sup></p> <p>Pin 436: 10<sup>4</sup></p> <p>Pin 437: 10<sup>5</sup></p> <p>Pin 438: 10<sup>6</sup></p> <p>Pin 439: 10<sup>7</sup></p> <p>Pin 440: 10<sup>8</sup></p> <p>Pin 441: 10<sup>9</sup></p> <p>Pin 442: 10<sup>0</sup></p> <p>Pin 443: 10<sup>1</sup></p> <p>Pin 444: 10<sup>2</sup></p> <p>Pin 445: 10<sup>3</sup></p> <p>Pin 446: 10<sup>4</sup></p> <p>Pin 447: 10<sup>5</sup></p> <p>Pin 448: 10<sup>6</sup></p> <p>Pin 449: 10<sup>7</sup></p> <p>Pin 450: 10<sup>8</sup></p> <p>Pin 451: 10<sup>9</sup></p> <p>Pin 452: 10<sup>0</sup></p> <p>Pin 453: 10<sup>1</sup></p> <p>Pin 454: 10<sup>2</sup></p> <p>Pin 455: 10<sup>3</sup></p> <p>Pin 456: 10<sup>4</sup></p> <p>Pin 457: 10<sup>5</sup></p> <p>Pin 458: 10<sup>6</sup></p> <p>Pin 459: 10<sup>7</sup></p> <p>Pin 460: 10<sup>8</sup></p> <p>Pin 461: 10<sup>9</sup></p> <p>Pin 462: 10<sup>0</sup></p> <p>Pin 463: 10<sup>1</sup></p> <p>Pin 464: 10<sup>2</sup></p> <p>Pin 465: 10<sup>3</sup></p> <p>Pin 466: 10<sup>4</sup></p> <p>Pin 467: 10<sup>5</sup></p> <p>Pin 468: 10<sup>6</sup></p> <p>Pin 469: 10<sup>7</sup></p> <p>Pin 470: 10<sup>8</sup></p> <p>Pin 471: 10<sup>9</sup></p> <p>Pin 472: 10<sup>0</sup></p> <p>Pin 473: 10<sup>1</sup></p> <p>Pin 474: 10<sup>2</sup></p> <p>Pin 475: 10<sup>3</sup></p> <p>Pin 476: 10<sup>4</sup></p> <p>Pin 477: 10<sup>5</sup></p> <p>Pin 478: 10<sup>6</sup></p> <p>Pin 479: 10<sup>7</sup></p> <p>Pin 480: 10<sup>8</sup></p> <p>Pin 481: 10<sup>9</sup></p> <p>Pin 482: 10<sup>0</sup></p> <p>Pin 483: 10<sup>1</sup></p> <p>Pin 484: 10<sup>2</sup></p> <p>Pin 485: 10<sup>3</sup></p> <p>Pin 486: 10<sup>4</sup></p> <p>Pin 487: 10<sup>5</sup></p> <p>Pin 488: 10<sup>6</sup></p> <p>Pin 489: 10<sup>7</sup></p> <p>Pin 490: 10<sup>8</sup></p> <p>Pin 491: 10<sup>9</sup></p> <p>Pin 492: 10<sup>0</sup></p> <p>Pin 493: 10<sup>1</sup></p> <p>Pin 494: 10<sup>2</sup></p> <p>Pin 495: 10<sup>3</sup></p> <p>Pin 496: 10<sup>4</sup></p> <p>Pin 497: 10<sup>5</sup></p> <p>Pin 498: 10<sup>6</sup></p> <p>Pin 499: 10<sup>7</sup></p> <p>Pin 500: 10<sup>8</sup></p> <p>Pin 501: 10<sup>9</sup></p> <p>Pin 502: 10<sup>0</sup></p> <p>Pin 503: 10<sup>1</sup></p> <p>Pin 504: 10<sup>2</sup></p> <p>Pin 505: 10<sup>3</sup></p> <p>Pin 506: 10<sup>4</sup></p> <p>Pin 507: 10<sup>5</sup></p> <p>Pin 508: 10<sup>6</sup></p> <p>Pin 509: 10<sup>7</sup></p> <p>Pin 510: 10<sup>8</sup></p> <p>Pin 511: 10<sup>9</sup></p> <p>Pin 512: 10<sup>0</sup></p> <p>Pin 513: 10<sup>1</sup></p> <p>Pin 514: 10<sup>2</sup></p> <p>Pin 515: 10<sup>3</sup></p> <p>Pin 516: 10<sup>4</sup></p> <p>Pin 517: 10<sup>5</sup></p> <p>Pin 518: 10<sup>6</sup></p> <p>Pin 51</p>


## ■ Main Functions

### Measurement

#### Timing Hold


##### Normal

- Continuously performs measurement and always outputs based on comparative results.

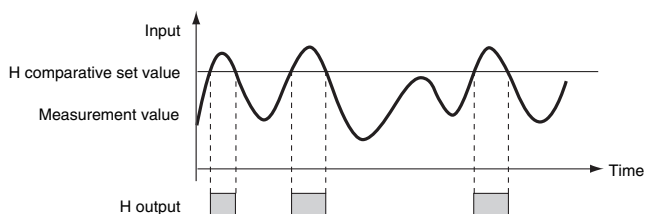


##### Peak Hold/Bottom Hold

- Measures the maximum (or minimum) value in a specified period.

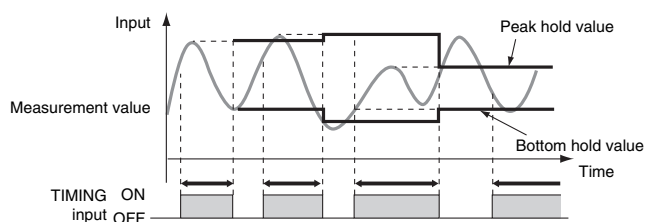


##### Sampling Hold

- Holds the measurement at the rising edge of the TIMING signal.

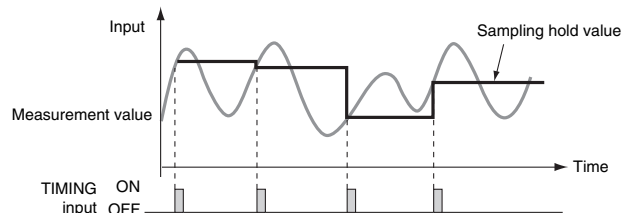

##### Peak-to-peak Hold

- Measures the difference between the maximum and minimum values in a specified period.

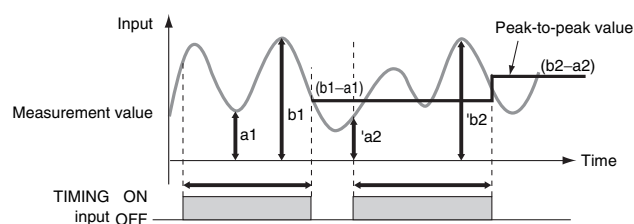

#### Standby Sequence

Turns the comparative output OFF until the measurement value enters the PASS range.

#### Average Processing

Average processing of input signals with extreme changes or noise smooths out the display and makes control stable.

#### Previous Average Value Comparison

Slight changes can be removed from input signals to detect only extreme changes.

#### Temperature Input Shift

Shifts the temperature input value.


## Input Compensation/Display

### Zero-trimming

Compensates for mild fluctuations in input signals due to factors such as sensor temperature drift, based on OK (PASS) data at measurement. (This function can be used with sampling hold, peak hold, or bottom hold.)

### Zero-limit

Changes the display value to 0 for input values less than the set value. It is enabled in normal mode only. (This function can be used, for example, to stop negative values being displayed or to eliminate flickering and minor inconsistencies near 0.)

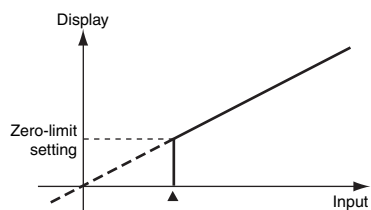


### Display Refresh Period

The display refresh period can be lengthened to reduce flickering and thereby make the display easier to read.

### Display Color Selection

Values can be displayed in either red or green. With comparative output models, the display color can also be set to change according to the status of comparative outputs (e.g., green to red or red to green).

Example) Setting: Green

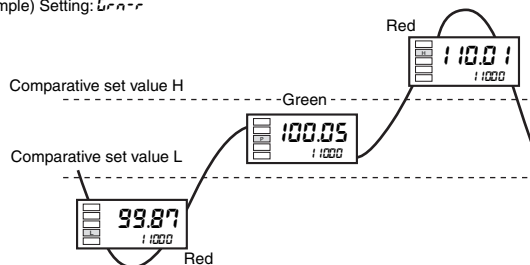

### Display Value Selection

The current display value can be selected from the present value, the maximum value, and the minimum value.

### Step Value

It is possible to specify (i.e., restrict) the values that the smallest displayed digit can change by. For example, if the setting is 2, the smallest digit will only take the values 0, 2, 4, 6, or 8 and if the setting is 5, it will only take the values 0 or 5. If the setting is 10, it will only take the value of 0.


### Interruption Memory

- The minimum and maximum values when the power supply is turned OFF can be saved if interruption memory is turned ON.
- If interruption memory is ON, the maximum and minimum values after the last resetting will be displayed.
- If interruption memory is OFF, the maximum and minimum values will be displayed after the power supply is turned ON (or after the reset input is performed).

## Output

### Comparative Output Pattern

The output pattern for comparative outputs can be selected. In addition to high/low comparison with set values, output based on level changes is also possible. (Use the type of output pattern appropriate for the application.)

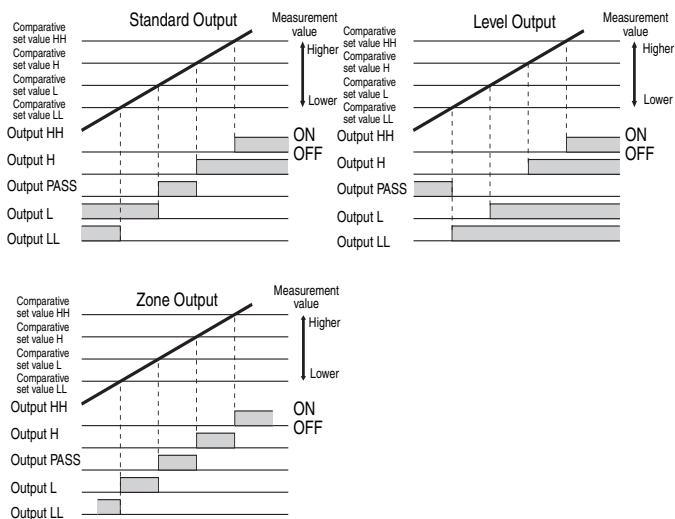


### Output Logic

Reverses the output operation of comparative outputs for comparative results.

### Hysteresis


Prevents comparative output chattering when the measurement value fluctuates slightly near the set value.

Example: Comparative Output Pattern (Standard Output)

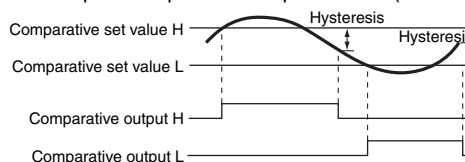

### Startup Compensation Timer


Measurement can be stopped for a set time using external input.

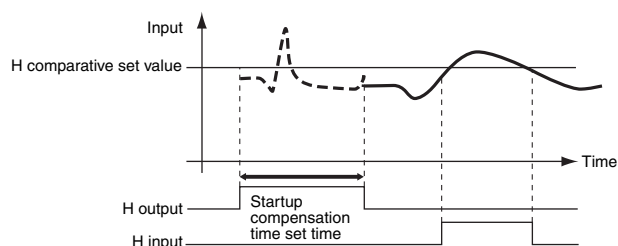


### PASS Output Change

Comparative results other than PASS and error signals can be output from the PASS output terminal.


## Dimensions

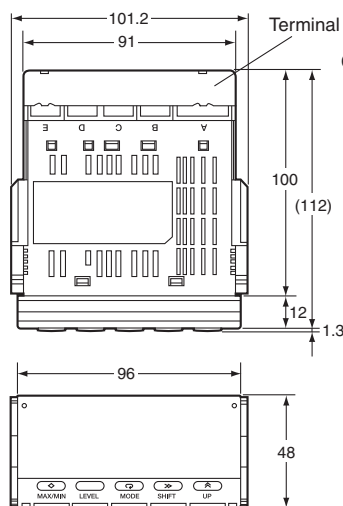

### Character Size for Main Display (mm)



### Panel Cutout Dimensions

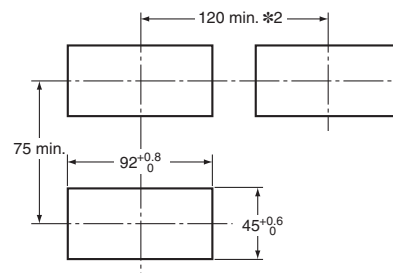

\*2. Leave a distance of at least 140 mm when using the Watertight Cover Y92A-49N.

**Note:** Mounting Recommended Panel Thickness 1 to 8 mm. Mount the product horizontally.


\*1. DeviceNet models: 97 mm  
Terminal: M3, Terminal Cover: Accessory

## ■ Wiring Precautions

- For terminal blocks, use the crimp terminals suitable for M3 screws.
- Tighten the terminal screws to the recommended tightening torque of approx. 0.5 N·m.
- To prevent inductive noise, separate the wiring for signal lines from that for power lines.


## Wiring

- Use the crimp terminals suitable for M3 screws shown below.



## Unit Stickers


- Select the appropriate units from the unit sticker sheets provided and attach the sticker to the Indicator.




**Note:** When using for meters, such as weighing meters, use the units specified by regulations on weights and measures.

## ■ Mounting Method

1. Insert the K3HB into the mounting cutout in the panel.
2. Insert watertight packing around the Unit to make the mounting watertight.

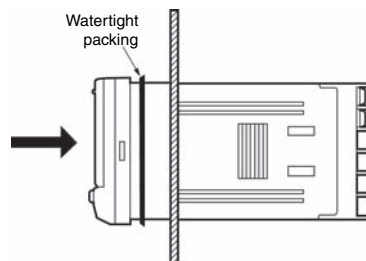


3. Insert the adapter into the grooves on the left and right sides of the rear case and push until it reaches the panel and is fixed in place.




## ■ LCD Field of Vision

The K3HB is designed to have the best visibility at the angles shown in the following diagram.

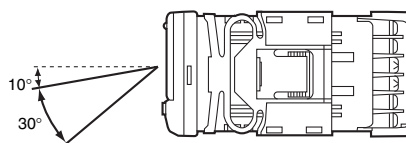


## ■ Watertight Cover

Y92A-49N



## ■ Rubber Packing

K32-P1



If the rubber packing is lost or damaged, it can be ordered using the following model number: K32-P1.

(Depending on the operating environment, deterioration, contraction, or hardening of the rubber packing may occur and so, in order to ensure the level of waterproofing specified in NEMA4, periodic replacement is recommended.)

**Note:** Rubber packing is provided with the Controller.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.