



UF92AM series

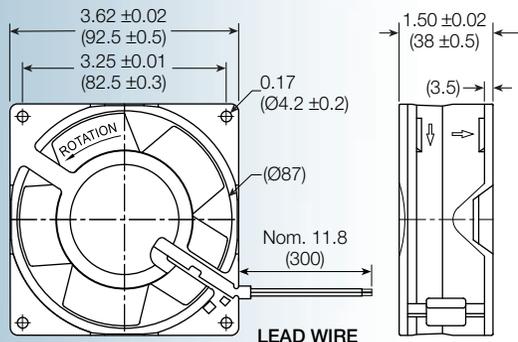

TERMINAL TYPE

Size: (92 x 92 x 38 mm)
3.62 x 3.62 x 1.5 inches

Features: *metal frame and impeller;*
Class F (155°) insulation;
-40°C ~ 90°C operating
temperature range;
high-temp bearing lubricant

Operating voltage (VAC): 115 or 230

Construction: aluminum die cast frame


Bearing option: motor quality ball bearings

Motor: shaded pole

Air flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: impedance

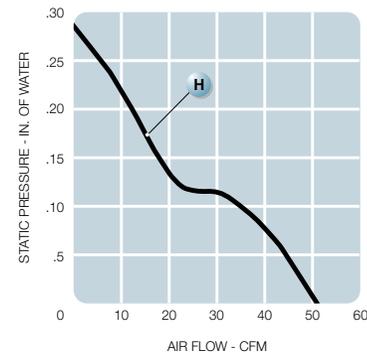

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dB	Wt OZ
							M ³ /Min	CFM	MM	INCH		
UF92AM12-__H	115	60	11	0.12	0.17	3,200	1.45	51	7.5	0.30	42	15
UF92AM23-__H	230	60	11	0.06	0.08	3,200	1.45	51	7.5	0.30	42	15