

CATALOG LISTING

1EN415-RB

PAGE 1 OF 1

RELEASE NO. PR-21754

REPLACES

ISSUE

3

CHECK

REVISIONS

A PR 21754

JJA

30 AUG 95

B CO-

93970

S A V

14 JAN 99

CHECK

1 SEP 95

CHECK

T S M

1 SEP 95





CHECK

DDM/CAD

DRAWN

J J A

30AUG95

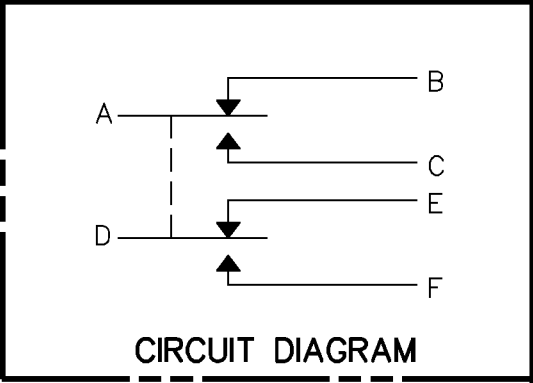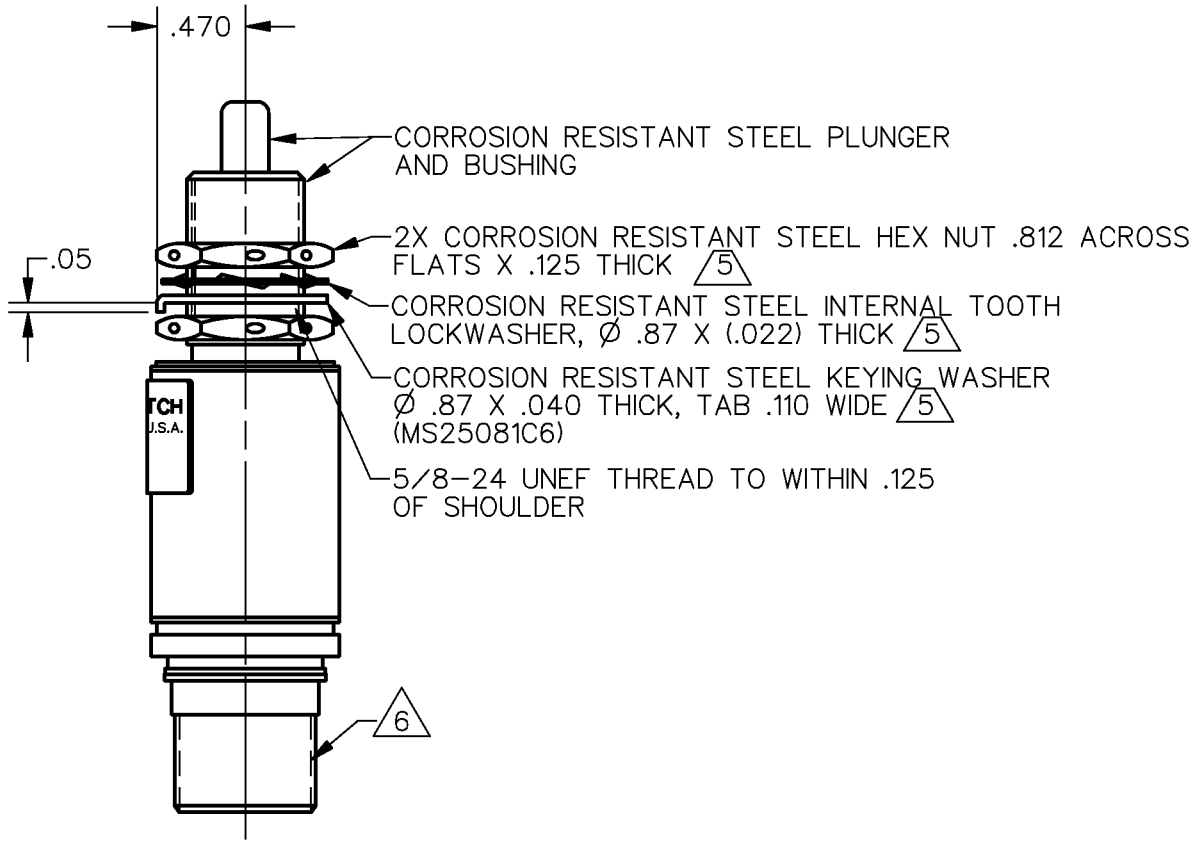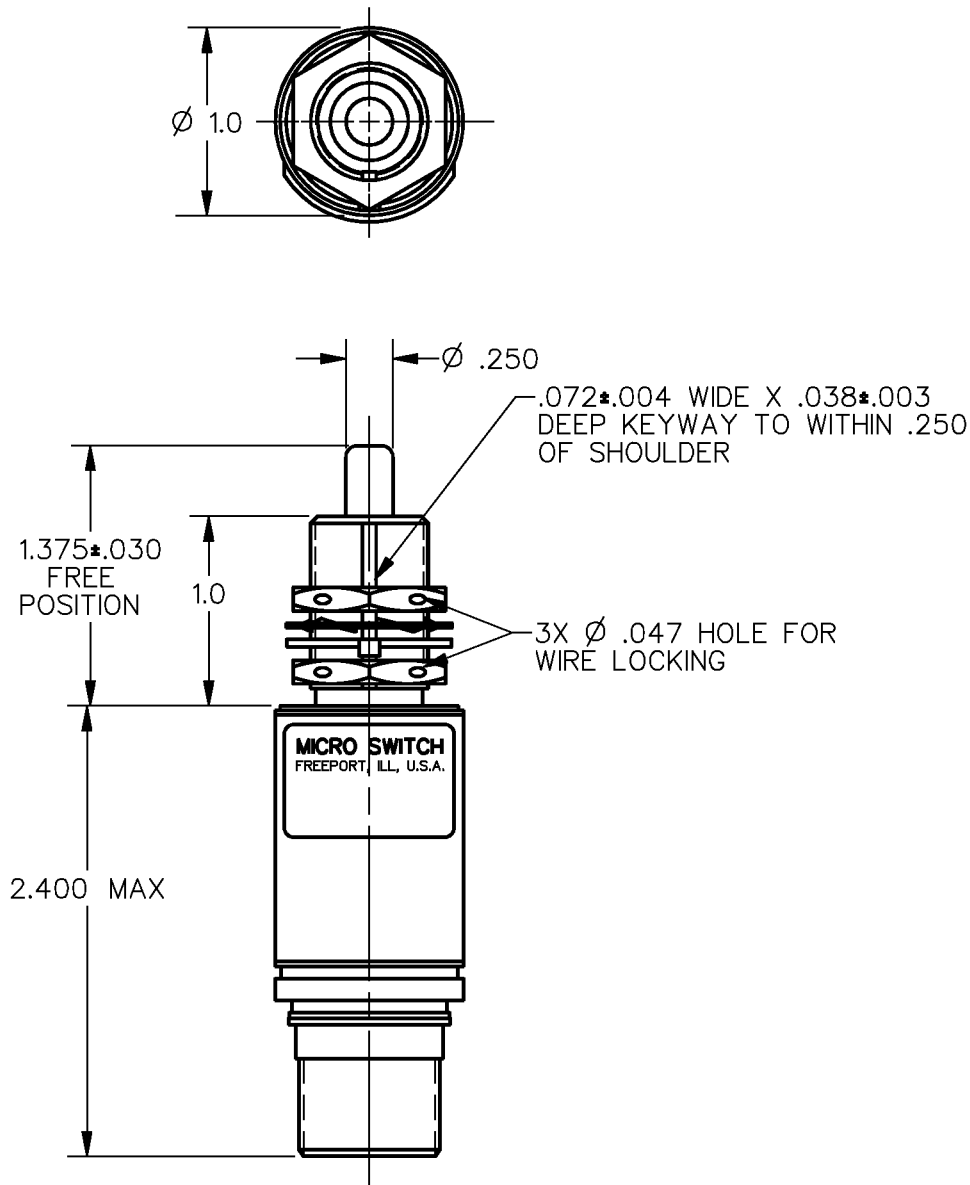

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			THIRD ANGLE PROJECTION	
CHARACTERISTICS	ELECTRICAL DATA		SCALE	FULL
	CONTACT ARRANGEMENT		DO NOT SCALE PRINT	
OPERATING FORCE ——— 4 LB NOM	2X S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
FULL OVERTRAVEL FORCE — 17 LB MAX	LOAD	28 VDC		ONE PLACE (.) ±.030
RELEASE FORCE ——— 2 LB MIN		SEA LEVEL	50,000 FT.	TWO PLACE (.) ±.015
PRETRAVEL ——— .040 MAX	RES	1	1	THREE PLACE (.) ±.005
DIFFERENTIAL TRAVEL — .020 MAX	IND	.5	.5	ANGLES ±
OVERTRAVEL ——— .250 MIN			WEIGHT	5.0 OZ MAX

- NOTES
- 1 — CORROSION RESISTANT STEEL ENCLOSURE
 - 2 — SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 - 3 — COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 4 — CIRCUIT DIAGRAM, DATE CODE, FED. MFG. CODE AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 5 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
 - 6 D38999/25YB98PN
 - 7 GOLD CONTACT BASIC SWITCHES

ANSI Y14.5M-1982 APPLIES