

# MOSFET - Power, Dual N- & P-Channel, SO8FL

**100 V, 13.4 mΩ, 60 A,  
-100 V, 36 mΩ, -36 A**



**ON Semiconductor®**

[www.onsemi.com](http://www.onsemi.com)

## NTMFC013NP10M5L

### Features

- Small Footprint (5 x 6 mm) for Compact Design
- Low  $R_{DS(on)}$  to Minimize Conduction Losses
- Low  $Q_G$  and Capacitance to Minimize Driver Losses
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Typical Applications

- Power Tools, Battery Operated Vacuums
- UAV/Drones, Material Handling
- Motor Drive, Home Automation

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ , Unless otherwise specified)



Parameter			Symbol	Q1	Q2	Unit
Drain-to-Source Breakdown Voltage			$V_{(BR)DSS}$	100	-100	V
Gate-to-Source Voltage			$V_{GS}$	$\pm 20$	$\pm 20$	V
Continuous Drain Current $R_{\theta JC}$ (Note 2)	Steady State	$T_C = 25^\circ\text{C}$	$I_D$	60	-36	A
			$P_D$	102	102	W
Continuous Drain Current $R_{\theta JA}$ (Notes 1, 2)	Steady State	$T_A = 25^\circ\text{C}$	$I_D$	9	-5	A
			$P_D$	2.7	2.7	W
Pulsed Drain Current	$T_A = 25^\circ\text{C}$ , $t_p = 10 \mu\text{s}$	$I_{DM}$	208	-184	A	
Operating Junction and Storage Temperature Range			$T_J, T_{stg}$	-55 to +150		$^\circ\text{C}$
Source Current (Body Diode)			$I_S$	85	85	A
Single Pulse Drain-to-Source Avalanche Energy ( $I_L = 17.9/18.4 \text{ A}$ , $L = 1 \text{ mH}$ )			$E_{AS}$	161	169	mJ
Lead Temperature Soldering Reflow for Soldering Purposes (1/8" from case for 10 s)			$T_L$	260	260	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface-mounted on FR4 board using 1 in<sup>2</sup> pad size, 1 oz Cu pad.
2. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.


$V_{(BR)DSS}$	$R_{DS(ON)} \text{ MAX}$	$I_D \text{ MAX}$
100 V	13.4 mΩ @ 10 V	60 A
-100 V	36 mΩ @ 10 V	-36 A

### Dual-Channel MOSFET

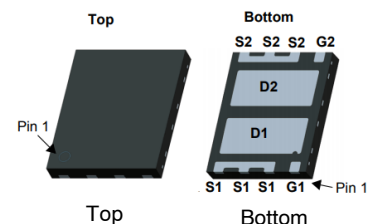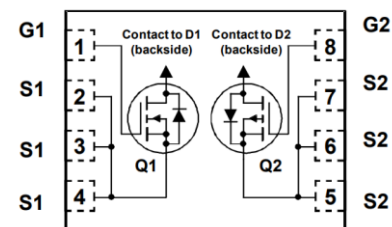

**WDFN8  
CASE 511DC**

### MARKING DIAGRAM



&Y = ON Semiconductor Logo  
 &Z = Assembly Plant Code  
 &2 = Numeric Date Code  
 &K = Lot Code  
 13NP10M5L = Specific Device Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 10 of this data sheet.

# NTMFC013NP10M5L

## THERMAL CHARACTERISTICS

Symbol	Parameter	Q1	Q2	Unit
$R_{\theta JC}$	Junction-to-Case – Steady State (Note 3)	1.46	1.46	°C/W
$R_{\theta JA}$	Junction-to-Ambient – Steady State (Note 3)	55	55	

3. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.

## ELECTRICAL CHARACTERISTICS (Q1, N-CHANNEL) ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

### OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$	100			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS} / T_J$	$I_D = 250\ \mu\text{A}, \text{ref to } 25^\circ\text{C}$		60		mV/°C
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{GS} = 0\text{ V}, V_{DS} = 80\text{ V}$	$T_J = 25^\circ\text{C}$		1	$\mu\text{A}$
			$T_J = 125^\circ\text{C}$		100	
Gate-to-Source Leakage Current	$I_{GSS}$	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$			$\pm 100$	nA

### ON CHARACTERISTICS

Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS} = V_{DS}, I_D = 158\ \mu\text{A}$	1.0	1.7	3.0	V
Negative Threshold Temperature Coefficient	$V_{GS(TH)} / T_J$	$I_D = 158\ \mu\text{A}, \text{ref to } 25^\circ\text{C}$		8.85		mV/°C
Drain-to-Source On Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = 8.5\text{ A}$		9.16	13.4	m $\Omega$
		$V_{GS} = 4.5\text{ V}, I_D = 6.8\text{ A}$		15.2	35.0	
Forward Transconductance	$g_{FS}$	$V_{DS} = 5\text{ V}, I_D = 8.5\text{ A}$		15.5		S
Gate-Resistance	$R_G$	$T_A = 25^\circ\text{C}$		1.57		$\Omega$

### CHARGES & CAPACITANCES

Input Capacitance	$C_{ISS}$	$V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 50\text{ V}$		1345		pF
Output Capacitance	$C_{OSS}$			307		
Reverse Transfer Capacitance	$C_{RSS}$			17.5		
Total Gate Charge	$Q_{G(TOT)}$	$V_{GS} = 4.5\text{ V}, V_{DS} = 50\text{ V}, I_D = 8.5\text{ A}$		12		nC
Threshold Gate Charge	$Q_{G(TH)}$			2.4		
Gate-to-Source Charge	$Q_{GS}$			4.7		
Gate-to-Drain Charge	$Q_{GD}$			5		
Total Gate Charge	$Q_{G(TOT)}$	$V_{GS} = 10\text{ V}, V_{DD} = 50\text{ V}, I_D = 8.5\text{ A}$		23		V
Plateau Voltage	$V_{GP}$			3.3		

### SWITCHING CHARACTERISTICS

Turn-On Delay Time	$t_{d(ON)}$	$V_{GS} = 10\text{ V}, V_{DS} = 50\text{ V}, I_D = 8.5\text{ A}, R_G = 6\ \Omega$		12		ns
Rise Time	$t_r$			8		
Turn-Off Delay Time	$t_{d(OFF)}$			30		
Fall Time	$t_f$			10		
Turn-On Delay Time	$t_{d(ON)}$	$V_{GS} = 4.5\text{ V}, V_{DS} = 50\text{ V}, I_D = 8.5\text{ A}, R_G = 6\ \Omega$		20.1		ns
Rise Time	$t_r$			40.9		
Turn-Off Delay Time	$t_{d(OFF)}$			22.7		
Fall Time	$t_f$			16		

# NTMFC013NP10M5L

## ELECTRICAL CHARACTERISTICS (Q1, N-CHANNEL) ( $T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>						
Forward Diode Voltage	$V_{SD}$	$V_{GS} = 0\text{ V},$ $I_S = 8.5\text{ A}$	$T_J = 25^\circ\text{C}$	0.77	1.2	V
			$T_J = 125^\circ\text{C}$	0.63		
Reverse Recovery Time	$t_{RR}$	$V_{GS} = 0\text{ V}, dI_S/dt = 100\text{ A}/\mu\text{s},$ $I_S = 4.2\text{ A}$		39		ns
Charge Time	$t_a$			22		
Discharge Time	$t_b$			17		
Reverse Recovery Charge	$Q_{RR}$			38		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## ELECTRICAL CHARACTERISTICS (Q2, P-CHANNEL) ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>						
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = -250\text{ }\mu\text{A}$	-100			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS} / T_J$	$I_D = -250\text{ }\mu\text{A},$ ref to $25^\circ\text{C}$		60		mV/ $^\circ\text{C}$
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{GS} = 0\text{ V},$ $V_{DS} = -80\text{ V}$	$T_J = 25^\circ\text{C}$		-1	$\mu\text{A}$
			$T_J = 125^\circ\text{C}$		-100	
Gate-to-Source Leakage Current	$I_{GSS}$	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$			$\pm 100$	nA

### ON CHARACTERISTICS

Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS} = V_{DS}, I_D = -158\text{ }\mu\text{A}$	-2.0	-3.31	-4.0	V
Negative Threshold Temperature Coefficient	$V_{GS(TH)} / T_J$	$I_D = -158\text{ }\mu\text{A},$ ref to $25^\circ\text{C}$		6.9		mV/ $^\circ\text{C}$
Drain-to-Source On Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = -8.5\text{ A}$		28.5	36	m $\Omega$
		$V_{GS} = -6\text{ V}, I_D = -5.7\text{ A}$		38.3	50.1	
Forward Transconductance	$g_{FS}$	$V_{DS} = -5\text{ V}, I_D = -8.5\text{ A}$		17.7		S
Gate-Resistance	$R_G$	$T_A = 25^\circ\text{C}$		2.41		$\Omega$

### CHARGES & CAPACITANCES

Input Capacitance	$C_{ISS}$	$V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = -50\text{ V}$		2443		pF
Output Capacitance	$C_{OSS}$			330		
Reverse Transfer Capacitance	$C_{RSS}$			15		
Total Gate Charge	$Q_{G(TOT)}$	$V_{GS} = -10\text{ V}, V_{DS} = -50\text{ V}, I_D = -8.5\text{ A}$		30		nC
Threshold Gate Charge	$Q_{G(TH)}$			6.9		
Gate-to-Source Charge	$Q_{GS}$			10.4		
Gate-to-Drain Charge	$Q_{GD}$			5.1		
Total Gate Charge	$Q_{G(TOT)}$	$V_{GS} = -6\text{ V}, V_{DS} = -50\text{ V}, I_D = -8.5\text{ A}$		18.4		V
Plateau Voltage	$V_{GP}$			5		

### SWITCHING CHARACTERISTICS

Turn-On Delay Time	$t_{d(ON)}$	$V_{GS} = 10\text{ V}, V_{DS} = -50\text{ V}, I_D = -8.5\text{ A},$ $R_G = 6\text{ }\Omega$		12.4		ns
Rise Time	$t_r$			16.1		
Turn-Off Delay Time	$t_{d(OFF)}$			20		
Fall Time	$t_f$			24		

# NTMFC013NP10M5L

## ELECTRICAL CHARACTERISTICS (Q2, P-CHANNEL) ( $T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(ON)}$	$V_{GS} = -6\text{ V}, V_{DS} = -50\text{ V}, I_D = -8.5\text{ A},$ $R_G = 6\ \Omega$		27		ns
Rise Time	$t_r$			25		
Turn-Off Delay Time	$t_{d(OFF)}$			22		
Fall Time	$t_f$			8.5		

### OFF CHARACTERISTICS

Forward Diode Voltage	$V_{SD}$	$V_{GS} = 0\text{ V},$ $I_S = -8.5\text{ A}$	$T_J = 25^\circ\text{C}$		-0.84	-1.2	V
			$T_J = 125^\circ\text{C}$		0.7		
Reverse Recovery Time	$t_{RR}$	$V_{GS} = 0\text{ V}, dI_S/dt = 100\text{ A}/\mu\text{s},$ $I_S = -4.2\text{ A}$		39		ns	
Charge Time	$t_a$			23			
Discharge Time	$t_b$			16.6			
Reverse Recovery Charge	$Q_{RR}$			38		nC	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# NTMFC013NP10M5L

## TYPICAL CHARACTERISTICS – N-CANNEL

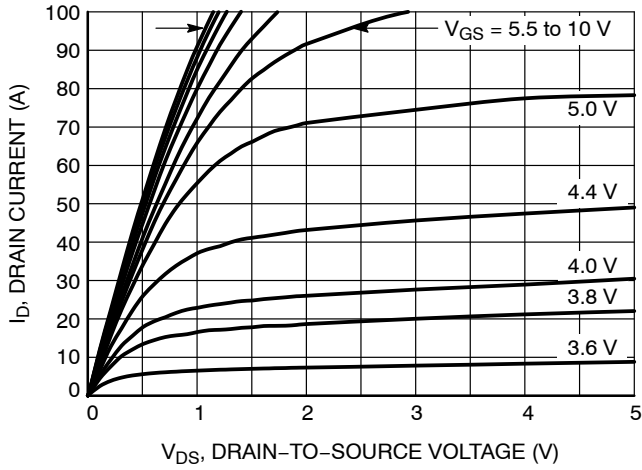


Figure 1. On-Region Characteristics

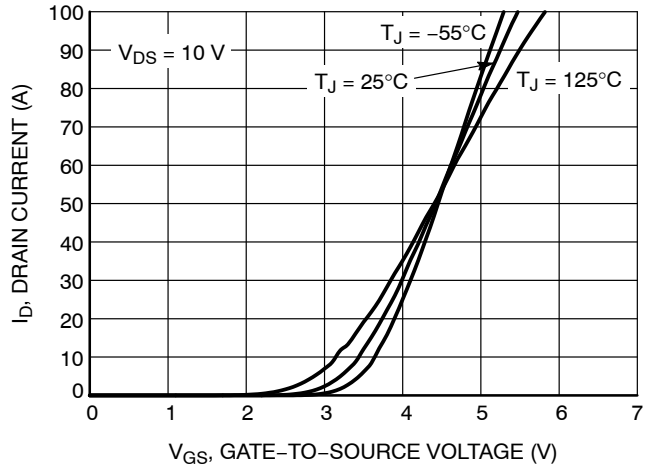


Figure 2. Transfer Characteristics

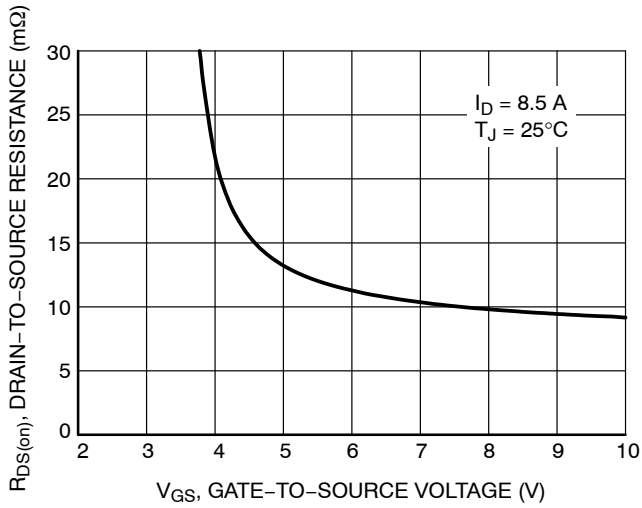


Figure 3. On-Resistance vs. Gate-to-Source Voltage

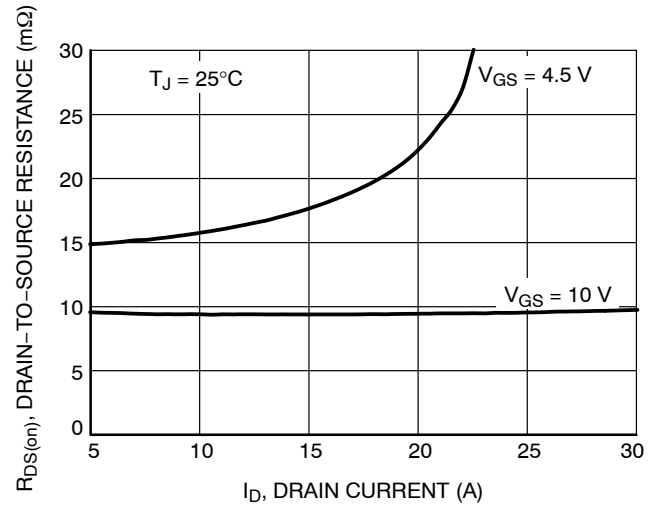


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

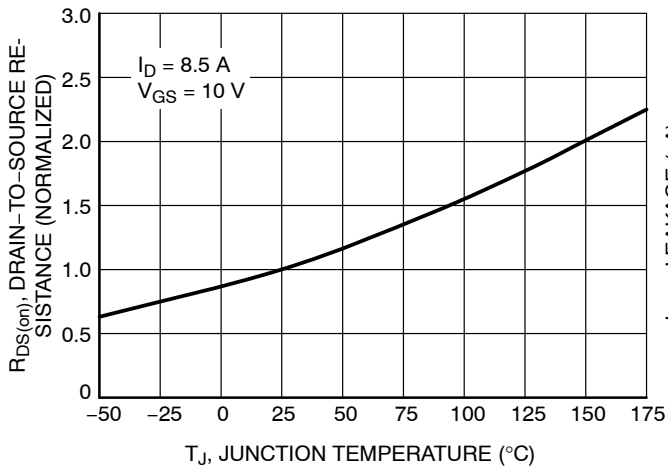


Figure 5. On-Resistance Variation with Temperature

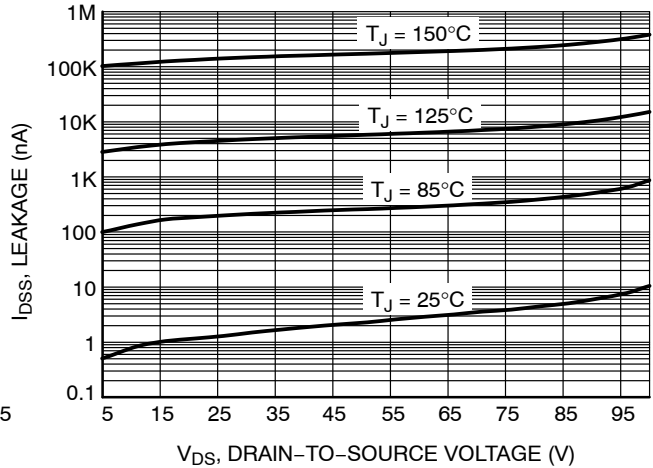


Figure 6. Drain-to-Source Leakage Current vs. Voltage

# NTMFC013NP10M5L

## TYPICAL CHARACTERISTICS – N-CHANNEL

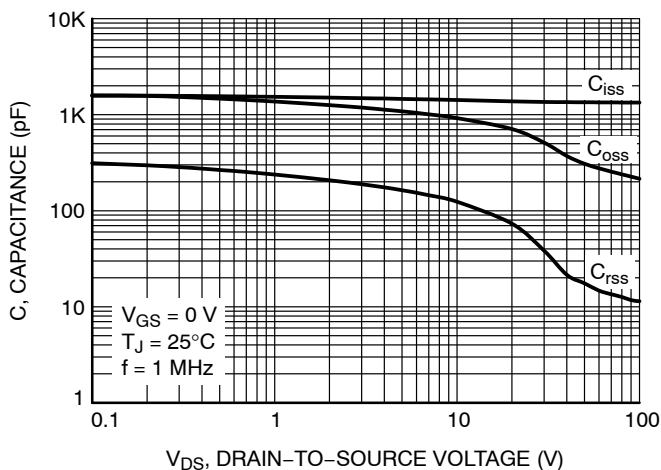


Figure 7. Capacitance Variation

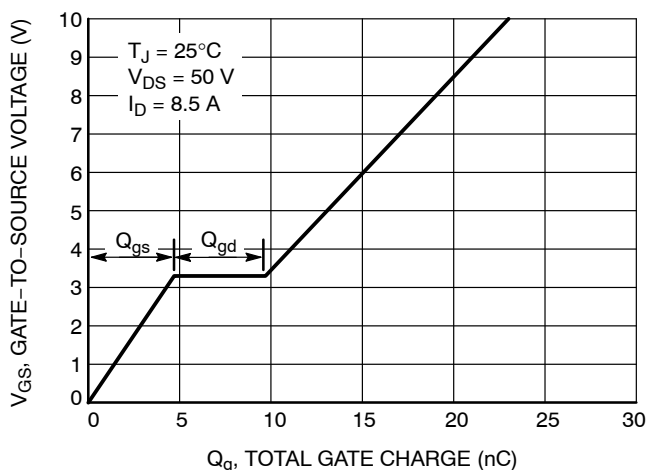


Figure 8. Gate-to-Source vs. Total Charge

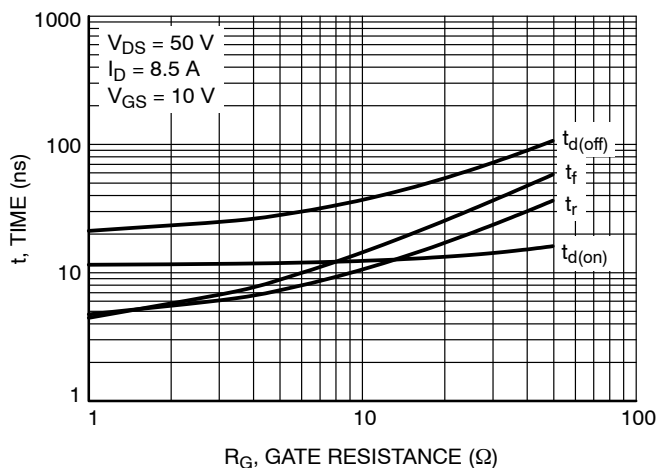


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

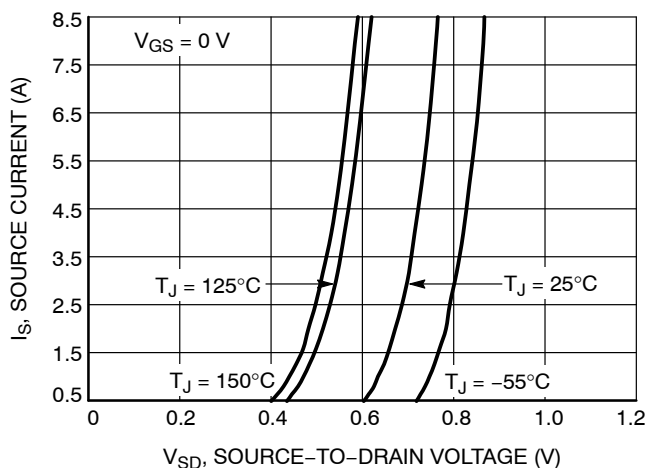


Figure 10. Diode Forward Voltage vs. Current

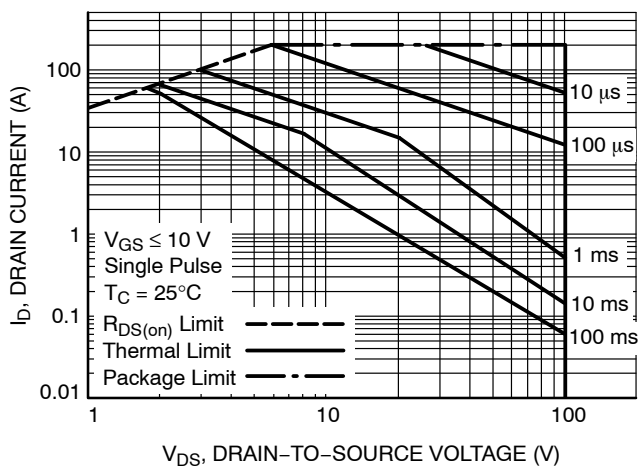


Figure 11. Maximum Rated Forward Biased Safe Operating Area

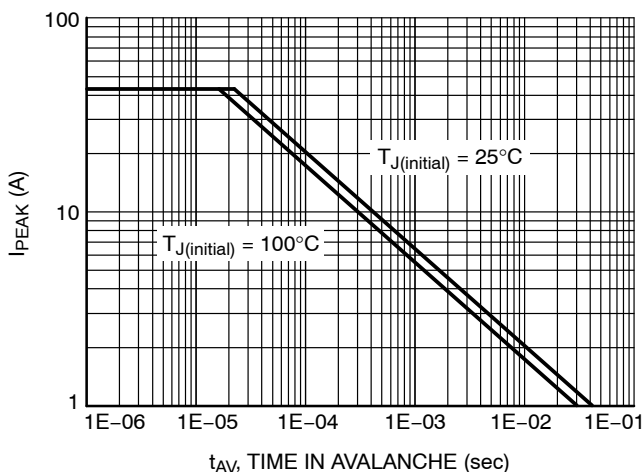


Figure 12. Maximum Drain Current vs. Time in Avalanche

# NTMFC013NP10M5L

## TYPICAL CHARACTERISTICS – N-CHANNEL

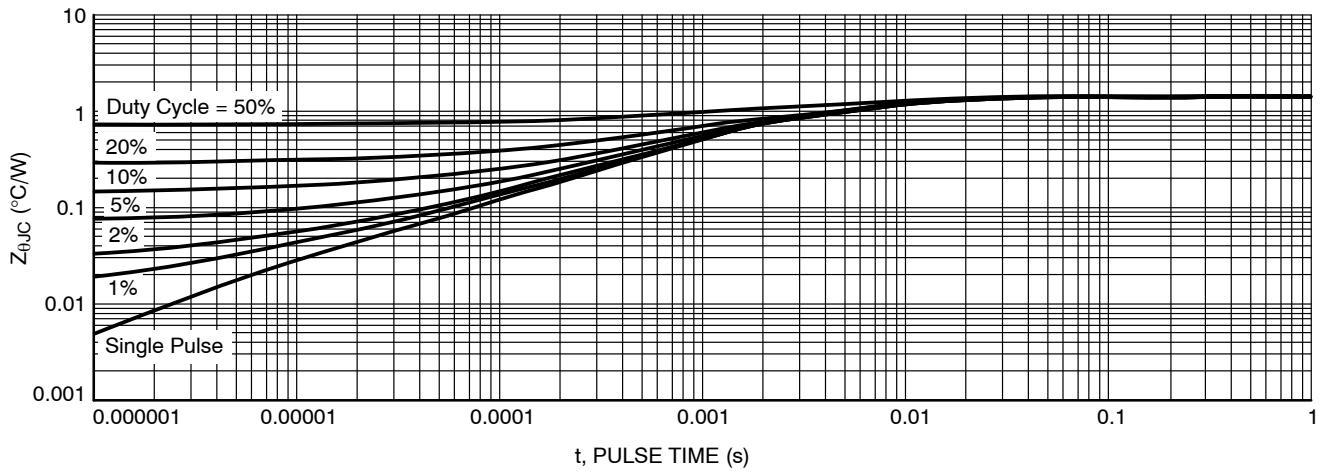


Figure 13. Thermal Response

# NTMFC013NP10M5L

## TYPICAL CHARACTERISTICS – P-CHANNEL

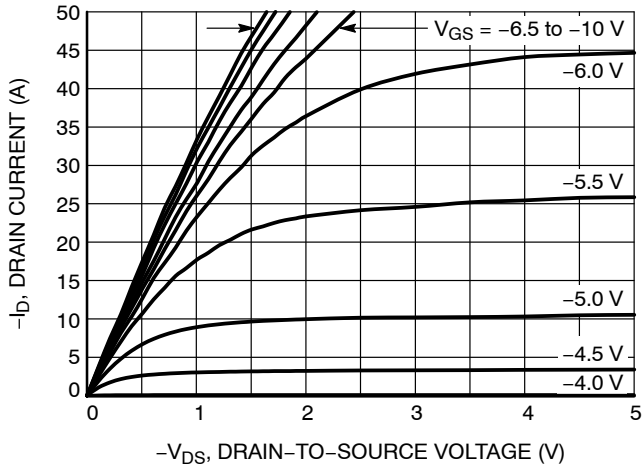


Figure 14. On-Region Characteristics

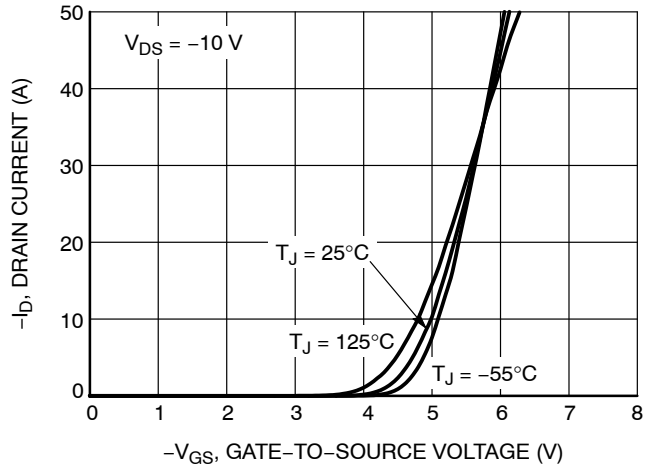


Figure 15. Transfer Characteristics

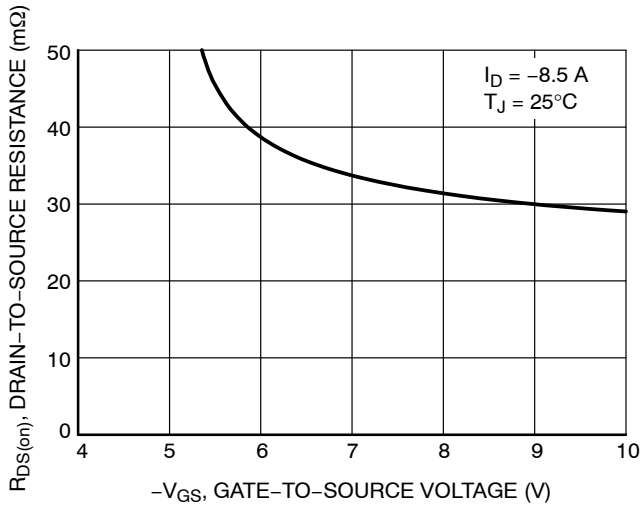


Figure 16. On-Resistance vs. Gate-to-Source Voltage

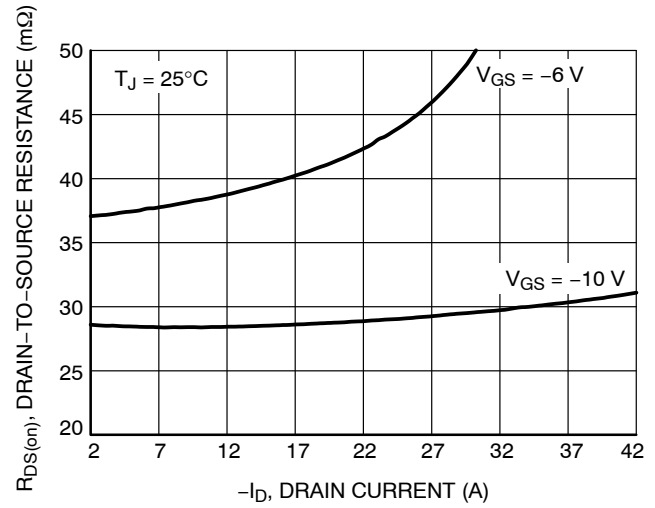


Figure 17. On-Resistance vs. Drain Current and Gate Voltage

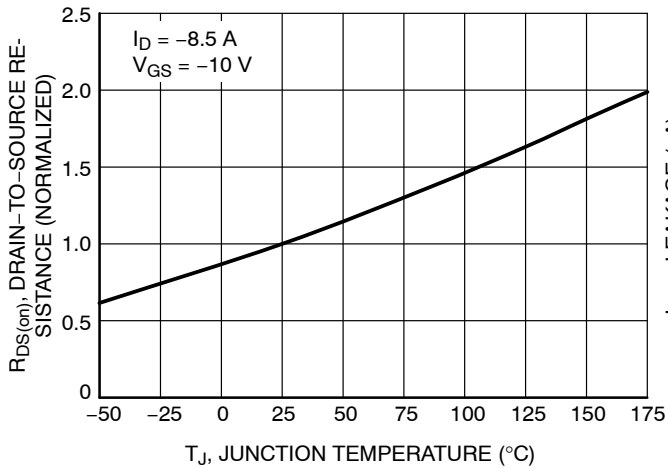


Figure 18. On-Resistance Variation with Temperature


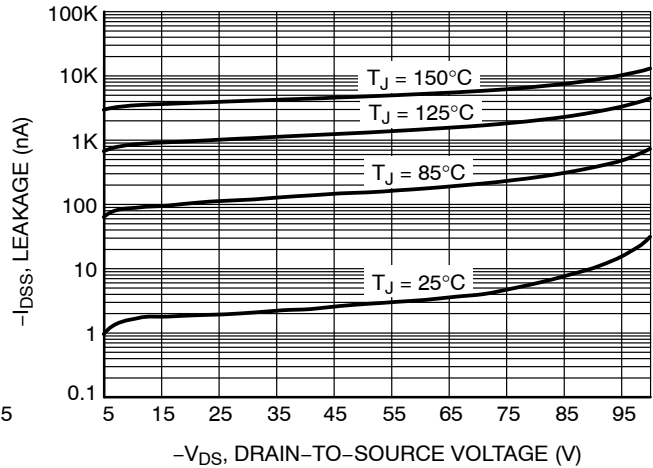



Figure 19. Drain-to-Source Leakage Current vs. Voltage

# NTMFC013NP10M5L


## TYPICAL CHARACTERISTICS – P-CHANNEL

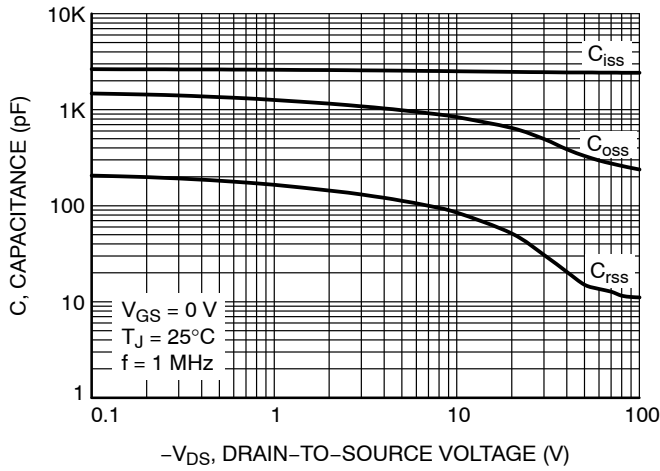


**Figure 20. Capacitance Variation**

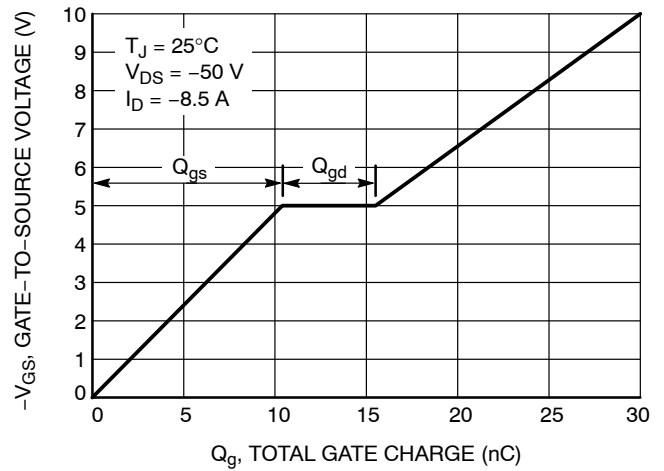


**Figure 21. Gate-to-Source vs. Total Charge**

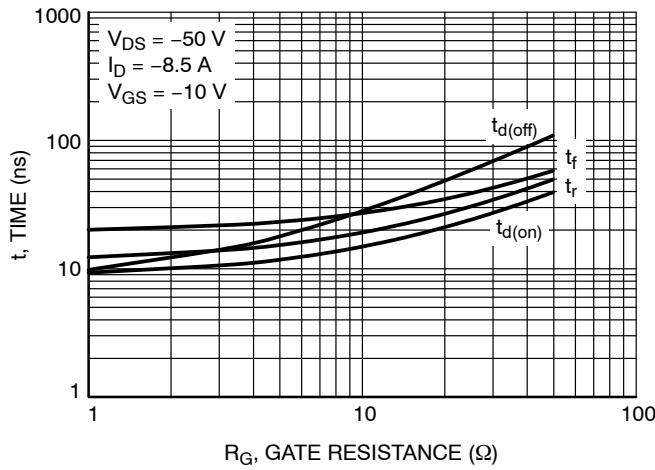


**Figure 22. Resistive Switching Time Variation vs. Gate Resistance**

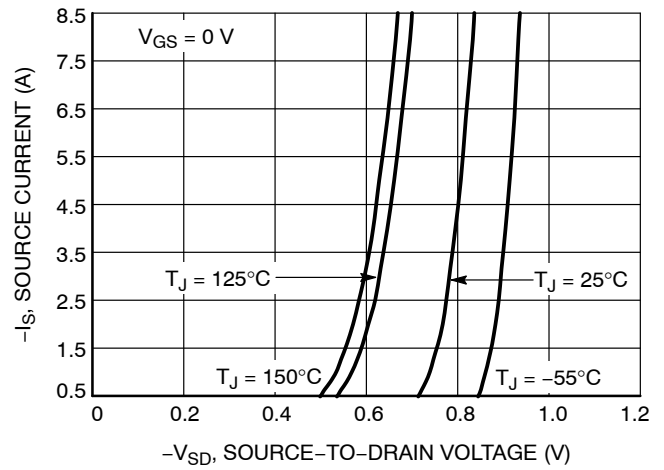

**Figure 23. Diode Forward Voltage vs. Current**

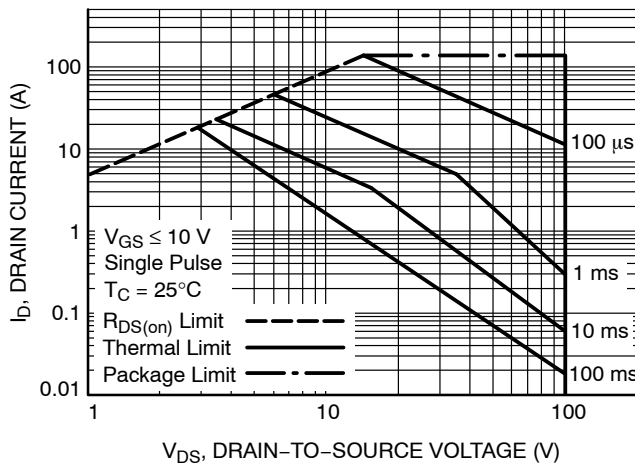

**Figure 24. Maximum Rated Forward Biased Safe Operating Area**

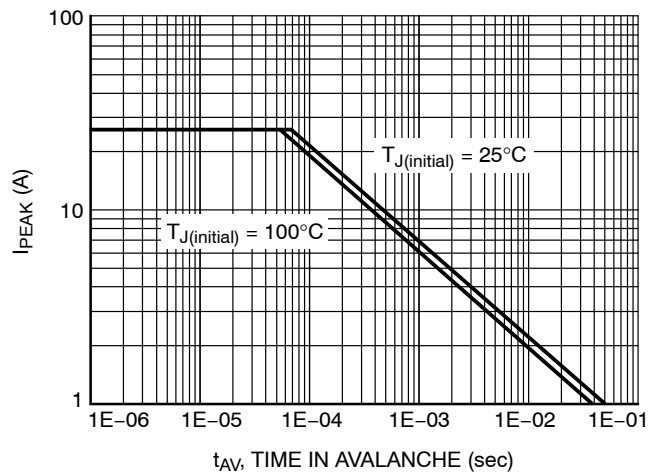

**Figure 25. Maximum Drain Current vs. Time in Avalanche**

# NTMFC013NP10M5L

## TYPICAL CHARACTERISTICS – P-CHANNEL

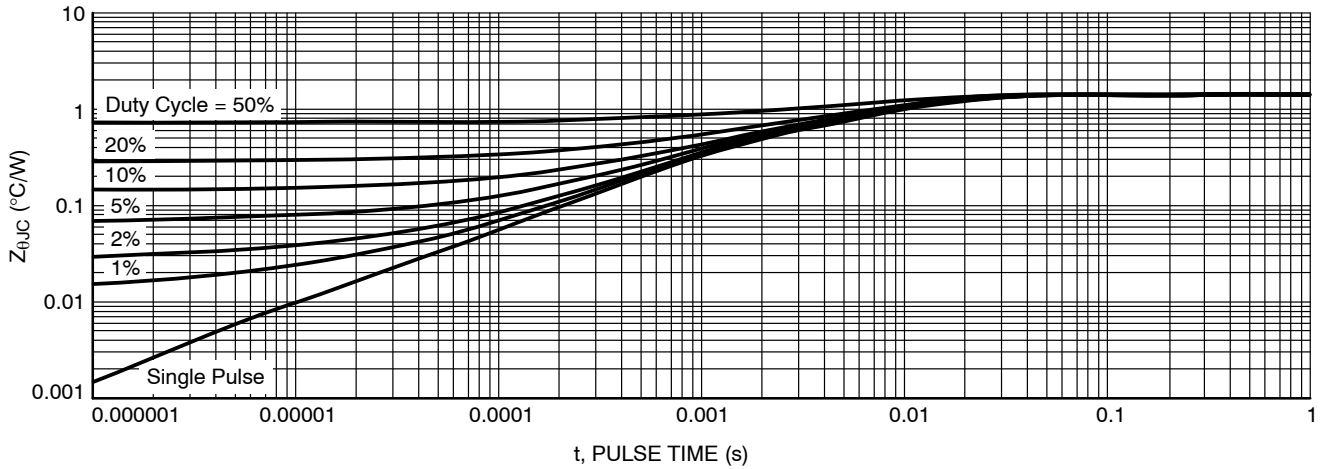


Figure 26. Thermal Response

### ORDERING INFORMATION


Device	Device Marking	Package	Shipping (Qty / Packing) <sup>†</sup>
NTMFC013NP10M5L	13NP10M5L	SO8FL (Pb-Free/Halogen Free)	3000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


# NTMFC013NP10M5L

## PACKAGE DIMENSIONS

WDFN8 5x6, 1.27P  
CASE 511DC  
ISSUE O

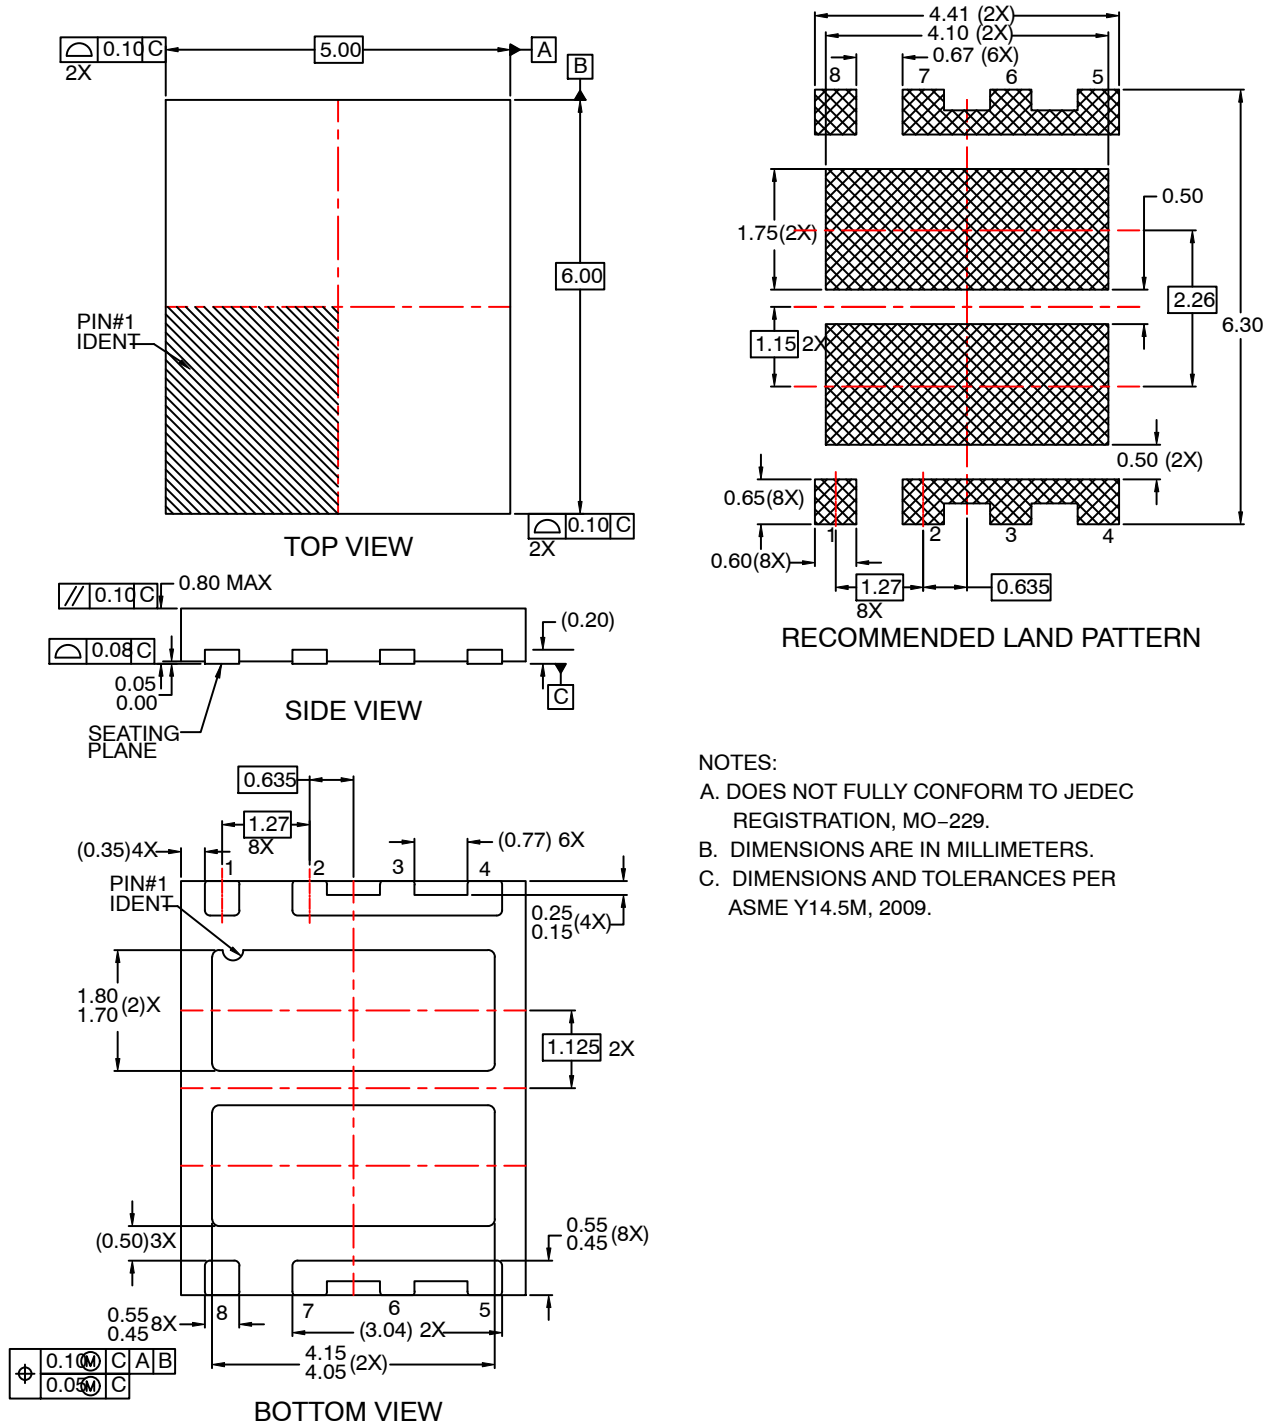

- NOTES:
- A. DOES NOT FULLY CONFORM TO JEDEC REGISTRATION, MO-229.
  - B. DIMENSIONS ARE IN MILLIMETERS.
  - C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

North American Technical Support:  
Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative