

# Sensor/actuator cable - SAC-8P-20,0-PUR/M12FS SH VA - 1401236

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 8-position, PUR halogen-free, black-gray RAL 7021, shielded, free cable end, on Socket straight M12, A-coded, cable length: 20 m



## Key Commercial Data

|                        |               |
|------------------------|---------------|
| Packing unit           | 1 STK         |
| Minimum order quantity | 50 STK        |
| GTIN                   |               |
| GTIN                   | 4046356540919 |

## Technical data

### Dimensions

|  |       |
|--|-------|
| Length of cable                            | 20 m  |
| Stripping length of the free conductor end | 50 mm |

### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |
|                                 | IP69K                            |

### General

|                       |              |
|-----------------------|--------------|
| Rated current at 40°C | 2 A          |
| Rated voltage         | 30 V AC      |
|                       | 30 V DC      |
| Number of positions   | 8            |
| Insulation resistance | ≥ 100 MΩ     |
| Coding                | A - standard |
| Status display        | No           |

# Sensor/actuator cable - SAC-8P-20,0-PUR/M12FS SH VA - 1401236

## Technical data

### General

|                             |       |
|-----------------------------|-------|
| Overvoltage category        | II    |
| Degree of pollution         | 3     |
| Insertion/withdrawal cycles | ≥ 100 |

### Material

|  |   |
|--|---|
| Flammability rating according to UL 94 | HB  |
| Contact material                       | CuZn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Stainless steel                             |
| Sealing material                       | NBR   |

### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

### Cable

|   |  |
|---|--|
| Cable type                                      | PUR halogen-free black                             |
| Cable type (abbreviation)                       | PUR  |
| Cable abbreviation                              | LiF9YC11Y  |
| UL AWM style                                    | 20549 / 10493 (80°C/300 V)                         |
| Conductor cross section                         | 8x 0.25 mm <sup>2</sup> (Signal line)              |
| AWG signal line                                 | 24   |
| Conductor structure signal line                 | 32x 0.10 mm  |
| Core diameter including insulation              | 1.17 mm ±0.02 mm                                   |
| Thickness, insulation                           | approx. 0.2 mm                                     |
| Wire colors                                     | Brown, white, green, yellow, gray, pink, blue, red |
| Overall twist                                   | 8 wires around filler to the core                  |
| Shielding                                       | Tinned copper braided shield                       |
| Optical shield covering                         | 85 %   |
| External sheath, color                          | black-gray RAL 7021                                |
| Outer sheath thickness                          | approx. 0.5 mm                                     |
| External cable diameter D                       | 5.9 mm ±0.2 mm                                     |
| Minimum bending radius, fixed installation      | 5 x D  |
| Minimum bending radius, flexible installation   | 10 x D   |
| Number of bending cycles                        | 2000000  |
| Minimum bending radius, drag chain applications | 10 x D   |
| Traversing path                                 | 10 m   |
| Traversing rate                                 | 3 m/s  |
| Acceleration                                    | 10 m/s <sup>2</sup>                                |
| Cable weight                                    | 53 kg/km   |
| Outer sheath, material                          | PUR  |

# Sensor/actuator cable - SAC-8P-20,0-PUR/M12FS SH VA - 1401236

## Technical data

### Cable


|                                 |  |
|---------------------------------|--|
| Material conductor insulation   | PP   |
| Conductor material              | Bare Cu litz wires   |
| Insulation resistance           | $\geq 1 \text{ G}\Omega \cdot \text{km}$ (at 20 °C)        |
| Conductor resistance            | $\leq 78 \text{ }\Omega/\text{km}$ (at 20 °C)              |
| Nominal voltage, cable          | $\leq 300 \text{ V AC}$                                    |
| Test voltage, cable             | $\geq 3000 \text{ V AC}$ (Spark test)                      |
| Test voltage Core/Shield        | $\geq 2000 \text{ V AC}$ (for 60 s)                        |
| Special properties              | Flexible cable conduit capable                             |
| Flame resistance                | in acc. with UL FT-2                                       |
|                                 | according to UL 758/1581 (horizontal)                      |
|                                 | in accordance with UL 758/1581 FT2                         |
|                                 | According to DIN EN 60332-2-2 (20 s)                       |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                   |
|                                 | in accordance with DIN EN 50267-2-1                        |
| Other resistance                | hydrolysis and microbe resistant                           |
|                                 | Resistant to salt water                                    |
|                                 | Low adhesion   |
|                                 | Low adhesion   |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)               |
|                                 | -25 °C ... 80 °C (cable, flexible installation)            |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Schematic diagram



Pin assignment M12 socket, 8-pos., A-coded, view female side


Cable cross section




PUR halogen-free black [PUR]

# Sensor/actuator cable - SAC-8P-20,0-PUR/M12FS SH VA - 1401236

Dimensional drawing

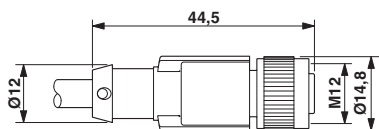

Circuit diagram



M12 x 1 socket, straight, shielded

Contact assignment of the M12 socket

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>