

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Plug-in octal relays with power contacts, 3 changeover contacts, test button, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, input voltage: 48 V DC

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Commercial Data

Item number	2908897
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	C05
Product Key	CK6193
Catalog Page	Page 308 (C-5-2019)
GTIN	4055626355504
Weight per Piece (including packing)	90.59 g
Weight per Piece (excluding packing)	5 g
Customs tariff number	85364190
Country of origin	PL

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Technical Data

Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	approx. 2×10^7 cycles

Insulation characteristics

Overvoltage category	III
Pollution degree	3
Insulation	Basic insulation

Electrical properties

Test voltage	2.5 kV _{rms} (50 Hz, 1 min., winding/contact)
Test voltage Contact/contact	2 kV _{rms} (50 Hz, 1 min., contact/contact)
Test voltage Changeover contact/changeover contact	2 kV _{rms} (50 Hz, 1 min., changeover contact/changeover contact)
Rated insulation voltage	250 V AC
Rated surge voltage	4 kV

Input data

Coil side

Nominal input voltage U_N	48 V DC
Input voltage range	40.8 V DC ... 52.8 V DC (20 °C)
Typical response time	18 ms
Typical release time	20 ms
Protective circuit	Damping diode
Status display	Yellow LED

Output data

Switching

Contact type	3 changeover contacts
Type of switch contact	Single contact
Drive and function	monostable
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	10 V (At 24 mA)
Limiting continuous current	10 A
Maximum inrush current	30 A (20 ms, N/O contacts)
Min. switching current	10 mA (at 24 V)
Interrupting rating (ohmic load) max.	240 W (at 24 V DC) 124 W (at 48 V DC) 108 W (at 60 V DC) 52 W (at 110 V DC)

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

	48 W (at 220 V DC)
	2500 VA (for 250 V AC)
Switching capacity min.	0.24 W
Switching capacity	2 A (at 24 V, DC13)
	0.22 A (at 120 V, DC13)
	0.11 A (at 250 V, DC13)
	3 A (at 24 V, AC15)
	3 A (at 120 V, AC15)
	1.5 A (at 240 V, AC15)

Connection data

Connection method	Plug-in connection
-------------------	--------------------

Dimensions

Width	35 mm
Height	35 mm
Depth	54.4 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT I
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Approval data

Corrosive gas test

Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60

Standards and regulations

Standards/regulations	IEC 60664
	IEC 61810

Mounting

Mounting position	any
-------------------	-----


Single relay - REL-OR3/LDP-48DC/3X21

2908897

<https://www.phoenixcontact.com/us/products/2908897>

Drawings

Diagram

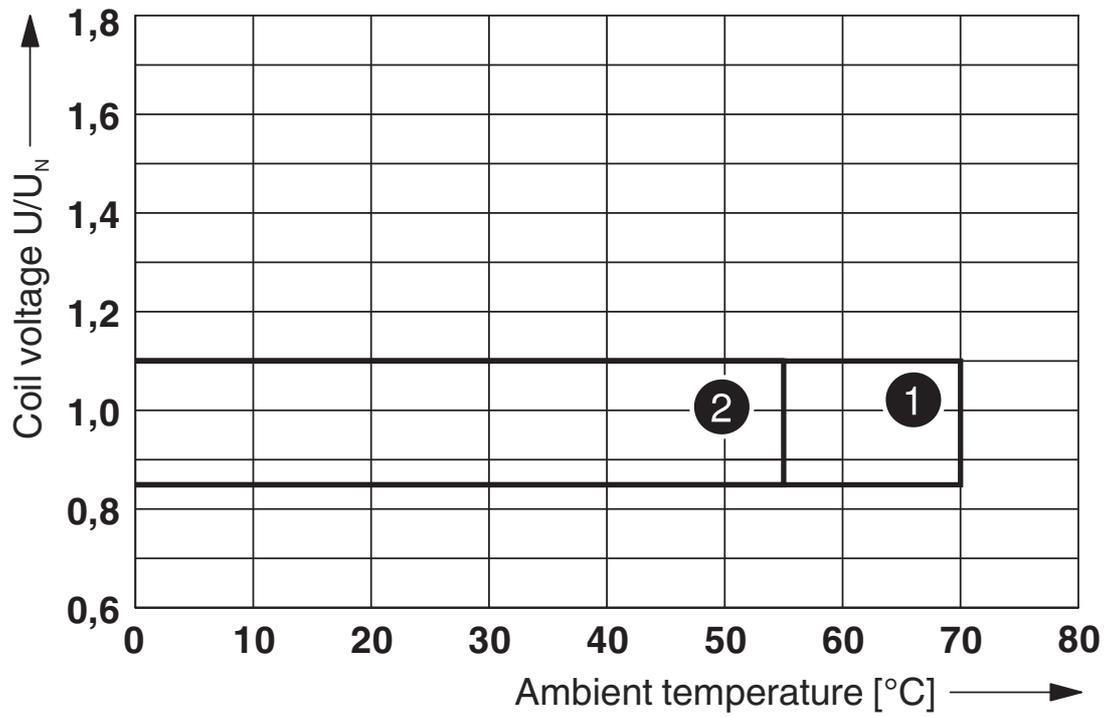

- ① DC coils
- ② AC coils

Operating voltage range


Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>


Diagram

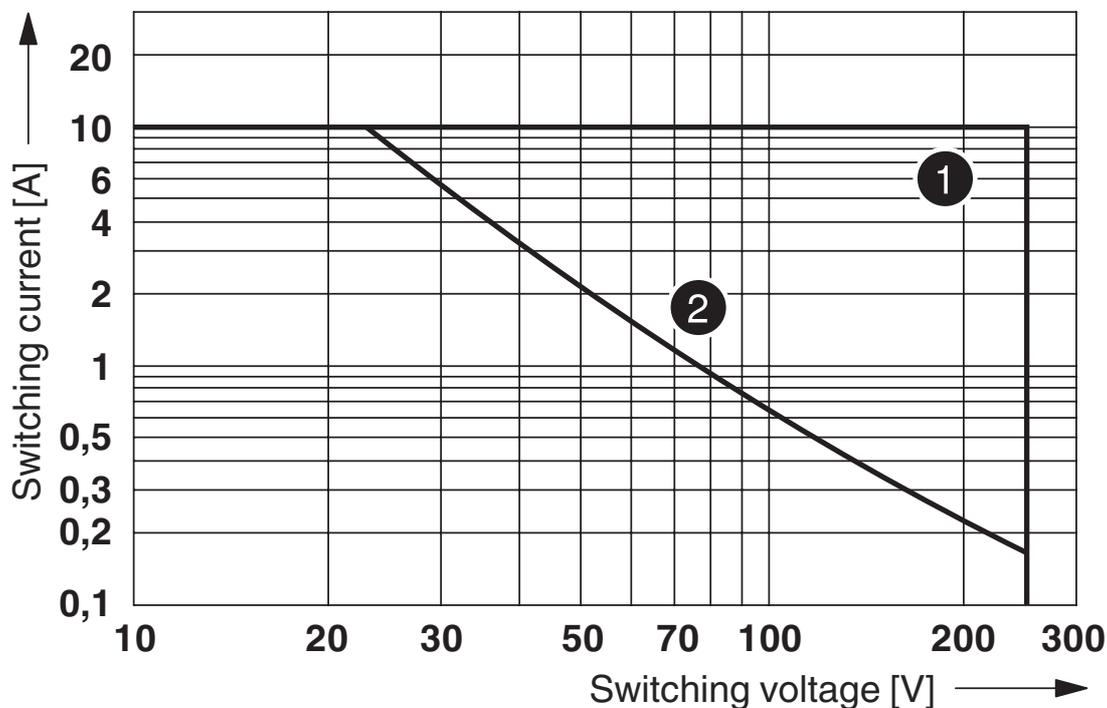

- ① AC, ohmic load
- ② DC, ohmic load

Interrupting rating

Circuit diagram

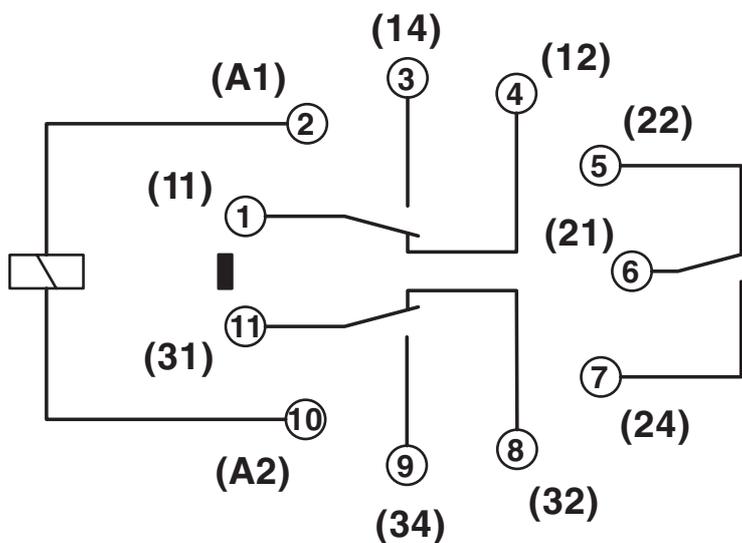


Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Diagram

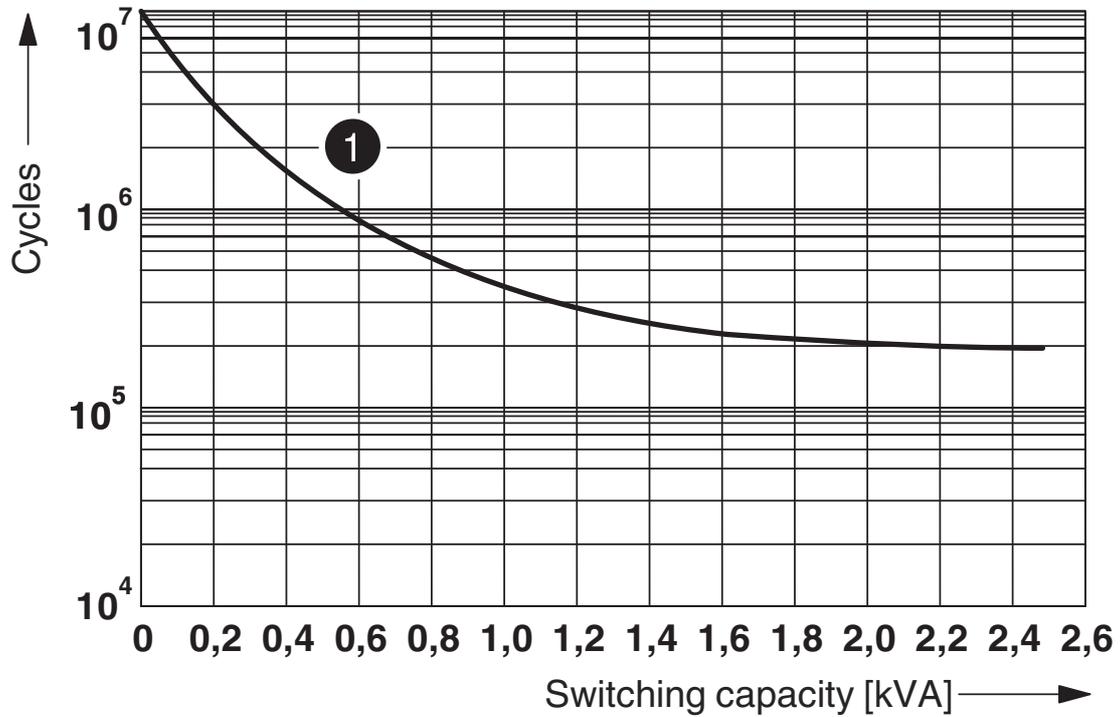

250 V AC, ohmic load

Electrical service life


Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Diagram

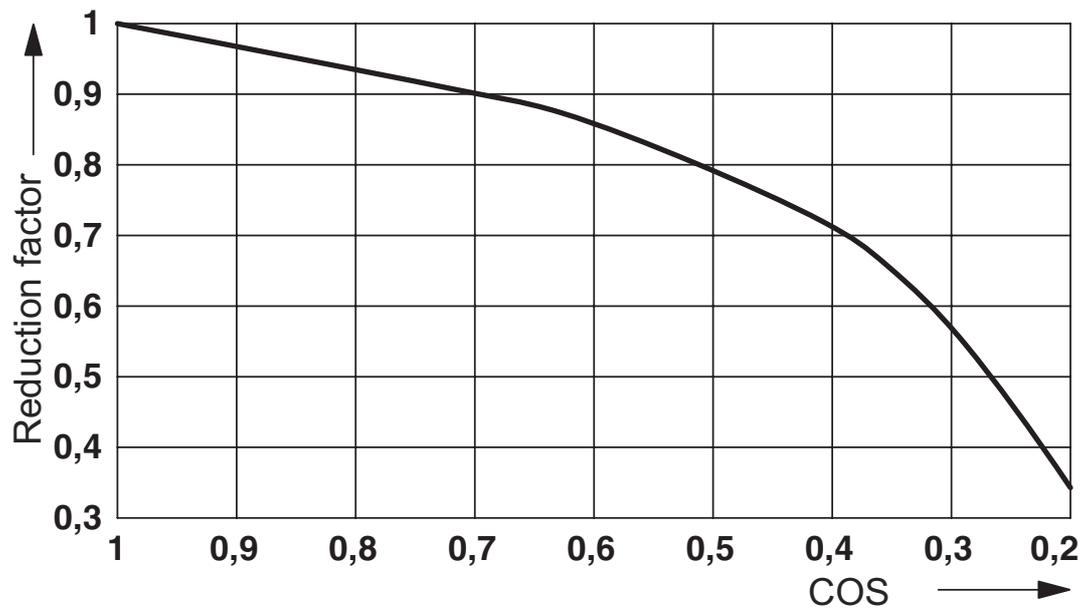

Service life reduction factor

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Approvals

 **CSA**
Approval ID: 2554095

 **cUL Recognized**
Approval ID: FILE E 172140

 **UL Recognized**
Approval ID: FILE E 172140

 **EAC**
Approval ID: TR_TS_D_00573_c

 **EAC**
Approval ID: RU*C-DE.*08.B.00010

cULus Recognized

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Classifications

ECLASS

ECLASS-9.0	27371601
ECLASS-10.0.1	27371601
ECLASS-11.0	27371601

ETIM

ETIM 8.0	EC001437
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Single relay - REL-OR3/LDP-48DC/3X21



2908897

<https://www.phoenixcontact.com/us/products/2908897>

Accessories

Relay base

Relay base - RIF-3-BPT/3X21 - 2900938

<https://www.phoenixcontact.com/us/products/2900938>



Relay base RIF-3..., for octal relays with 3 changeover contacts, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

Relay base

Relay base - RIF-3-BSC/3X21 - 2900936

<https://www.phoenixcontact.com/us/products/2900936>



RIF-3... relay base, for octal relay with 3 changeover contacts, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com