

PRODUCT FINDER

- Reed Switches
- Reed Relays
- Passive Infrared Detectors
- Photoelectric Beams
- Opto Sensors
- Proximity Sensors
- Automotive Sensors
- Level Sensors**
- Selection Chart
- ESL-002-003
- ESL-032-033
- ESL-102-103
- ESL-132-133
- FS-0033
- FS-0159
- FS-3101-3201
- FS-4101-4201
- FS-6101-6205**
- FS-8101-WF-01
- FS-9102-9101
- FS-9521
- TW-1205
- Flow Sensors
- Magnetic Contacts
- Video


Aleph FS-6101/6205 Level Sensor



Specifications

Liquid Used	Water (1.0)	
Material	Case	PP Resin
	Float	PP Resin
Electrical Characteristics	Maximum Switching Rate	50W
	Maximum Switching Voltage	200V
	Maximum Switching Current	0.6A
	Contact Withstand Voltage (DC)	250V
	Contact Resistance	0.3W max
Temperature Range	-10 to +60°C	


Dimensions

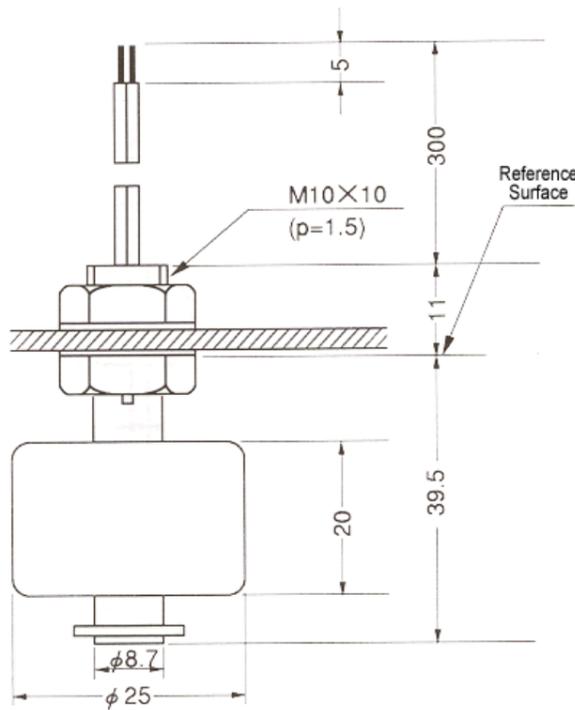

Dimensions in mm
(1mm = 0.0394 inches)

Switching Level

Switching Level (mm)
When a sensor is mounted upside down, the switching distance is changed. Please contact us for details.

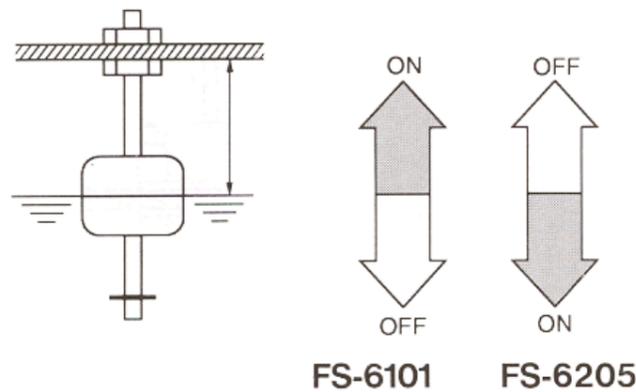

	FS-6101	FS-6205
ON	9.0 min.	21.0 max.
OFF	19.5 max.	14.0 min.

Detectors, Photoelectric Beams and Magnetic Contacts.

Aleph America
4700 Aircenter Circle
Reno, NV 89502

775-827-8000

[Flow Sensors](#)
[Magnetic Contacts](#)
[Aleph Video](#)

© 2015 Aleph America Corporation. All rights reserved.

[Privacy Policy](#) | [Terms of Use](#) | [Sitemap](#)