

**Product Details for 1052599 - 1**

**SMA/QMA RF Connectors**

[RoHS Compliant \(Statement of Compliance\)](#)


**Product Highlights:**

- ? Connector
- ? Jack
- ? Connector Type = SMA
- ? Terminate To Printed Circuit Board
- ? Body Style = Straight

[View all Features](#)

**Quick Links**

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

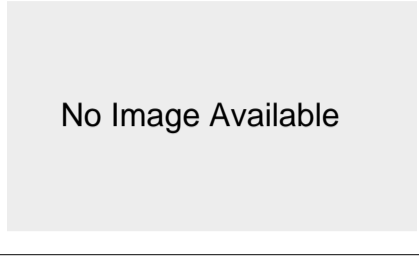

**1052599 - 1**

[Active](#)

**Documentation & Additional Information**

**Product Drawings:**

? None Available

**Catalog Pages/Data Sheets:**

? None Available

**Product Specifications:**

? None Available

**Application Specifications:**

? None Available

**Instruction Sheets:**

? None Available

**CAD Files:**

? None Available

**Additional Information:**

? [Product Line Information](#)

**Related Products:**

? [Tooling](#)

**Product Features** (Please use the Product Drawing for all design activity)

**Product Type Features:**

- ? [Product Type](#) = Connector
- ? [Gender](#) = Jack
- ? [Connector Type](#) = SMA
- ? [Body Style](#) = Straight
- ? [Number of Panel Mount Holes](#) = 4
- ? [PCB Mount Angle](#) = Vertical
- ? [Body Material](#) = Stainless Steel
- ? [Body Finish](#) = Gold
- ? [Center Contact](#) = With
- ? [Retractable Collar](#) = Without
- ? [Safety Wire Holes](#) = Without
- ? Dielectric Material = TFE Fluorocarbon
- ? Comment = Hermetically Sealed; Captured Center Contact

**Mechanical Attachment:**

- ? [Panel Attachment](#) = With
- ? [Panel Attachment Method](#) = Flange
- ? [Panel Attachment Style](#) = Front Mount
- ? Impedance (?) = 50

**Body Related Features:**

- ? [Length \(mm \[in\]\)](#) = 12.45 [0.490]
- ? O-Ring Material = Nitrile (Buna -N)

**Contact Related Features:**

- ? Center Contact Material = Beryllium Copper
- ? Center Contact Plating = Gold

**Industry Standards:**

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- ? [Terminate To](#) = Printed Circuit Board

**Other:**

- ? Brand = AMP