


Product Details for 1761072 -1

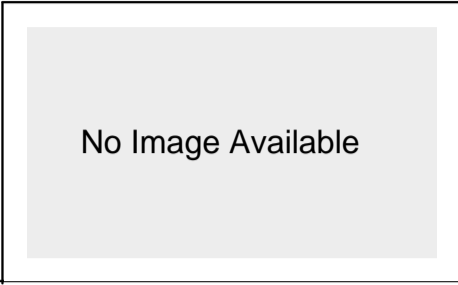

1761072 -1

[Active](#)

Receptacles, Plugs and Loopback Assembly

[RoHS Compliant \(Statement of Compliance\)](#)

Product Highlights:

- ? Receptacle
- ? Product Series = HSSDC2
- ? 7 Position
- ? Mount = Board Mount
- ? Used With Fibre Channel

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [RECEPTACLE ASSEMBLY, FIBRE CHANNEL, SURFACE MOUNT, S...](#) (TIF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? [High Speed Serial Data 2 Connector](#) (PDF, English)

Application Specifications:

- ? [High Speed Serial Data Connector 2 \(HSSDC2\)](#) (PDF, English)

Instruction Sheets:

- ? None Available

CAD Files: ([CAD Format & Compression Information](#))

- ? [3D Model](#) (STEP, Version 0)
- ? [3D Model](#) (IGES, Version 0)
- ? [2D Drawing](#) (DXF, Version 0)

[List all Documents](#)

Additional Information:

- ? [Product Line Information](#)

Additional Product Images:

- ? [Isometric Drawing](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? Product Type = Receptacle
- ? [Product Series](#) = HSSDC2
- ? [Number of Positions](#) = 7
- ? Mount = Board Mount
- ? [Mount Angle](#) = Right Angle
- ? [PCB Mount Style](#) = Surface Mount
- ? [PCB Retention Feature](#) = With
- ? PCB Retention Location = On Shell

Body Related Features:

- ? [Used With](#) = Fibre Channel
- ? Number of Bays = Single
- ? [PCB Retention Method](#) = Retention Legs

Contact Related Features:

- ? Contact Material = Copper Alloy
- ? Contact Mating Area Plating = Gold (50) over Nickel

Housing Related Features:

- ? Housing Material = LCP

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- ? Packaging Method = Tray

Other:

- ? Brand = AMP