


## 5650895-4 Product Details

### Have a Question?

Chat with a Product Information Specialist

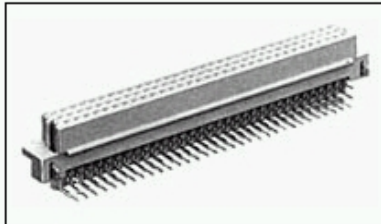

**5650895-4**

TE Internal Number: 5650895-4

 [Active](#)




### Eurocard Type R

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Housing Gender = Plug
- Contact Gender = Receptacle
- 96 Positions
- PCB Mount Angle = Right Angle
- With PCB Mount Retention

[View all Features](#)

[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)

### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

### Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [PCB Mount Angle](#) = Right Angle
- [PCB Mount Retention](#) = With
- [Post Type](#) = Solder Post
- [Mating Polarization](#) = Without
- [Guides](#) = Without
- [Make First / Break Last](#) = No
- [DIN Level](#) = II
- PCB Thickness (Minimum) (mm [in]) = 1.57 [0.062]
- Color = Gray

#### Termination Related Features:

- [Termination Post Length \(mm \[in\]\)](#) = 2.79 [0.110]

#### Body Related Features:

- [Number of Positions](#) = 96
- [PCB Mount Retention Type](#) = Boardlock(s)
- Contact Cross Section (mm [in]) = 0.30 x 0.61 [.012 x .024]
- [Rows Loaded](#) = A, B, C

#### Contact Related Features:

- Contact Gender = Receptacle
- Preloaded = Yes
- Contact Base Material = Phosphor Bronze

#### Housing Related Features:

- Housing Gender = Plug
- Housing Material = Polyester
- UL Flammability Rating = UL 94V-0

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- [Flux-Tight Coating](#) = Without
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Other:

- Brand = AMP

 [BOOKMARK](#) 

### Corporate Information

[Who We Are](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)


### Quick Links

[Check Distributor Inventory](#)  
[Cross Reference](#)  
[Find Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

### Customer Support

[Email or Chat with Us](#)  
[Find a Phone Number](#)  
[Search Knowledge Base](#)  
[Manage Your Account](#)

### Sign up for our eNewsletter

Enter your email address 

Follow us on: 