


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	NEW RELEASE	23JAN2007	RG	DO

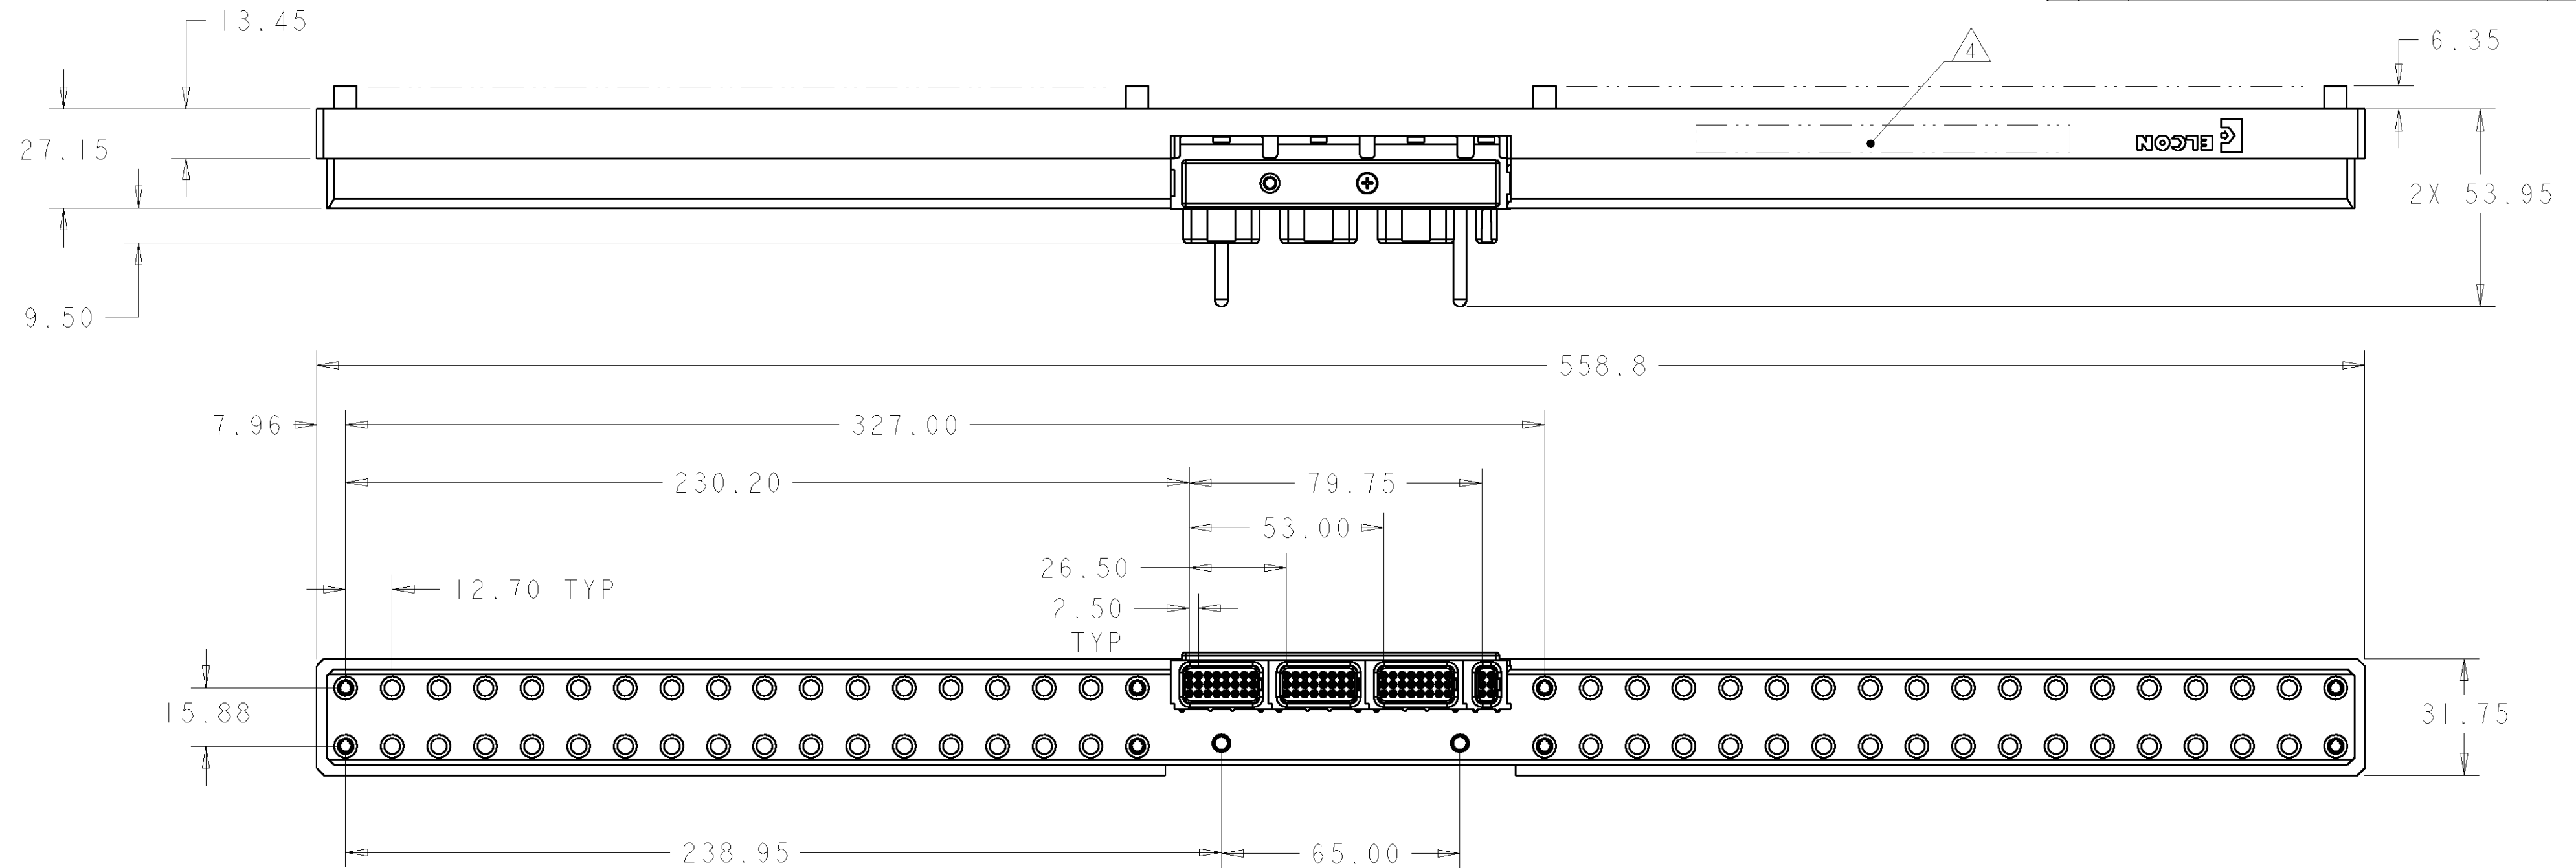

1. PART NUMBER CHANGES AND OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.

2. MATERIAL:


POWER INSULATOR - ULTEM 1000, COLOR - BLACK
SIGNAL INSULATOR - THERMOPLASTIC, GLASS REINFORCED
COLOR - BLACK, UL94V-0 FLAMABILITY RATED.
SOCKET BODY - COPPER ALLOY
SIGNAL PINS - BRASS ALLOY
RETENTION CLIP - BERYLLIUM COPPER
GUIDE PIN - BRASS ALLOY

3. FINISH: GOLD PLATE .000030" MIN THK. OVER NICKEL .000040" MIN THK.
SOLDER TAILS - TIN .000100 " MIN THK. OVER NICKEL .000040" MIN THK.
SOCKET BODY - SILVER PLATE .000200" MIN THK. OVER NICKEL .000040"
MIN THK.
GUIDE PIN - PASSIVE

4 ITEMS PROVIDED TO THIS SPECIFICATION TO BE PERMANENTLY IDENTIFIED PER THE FOLLOWING IDENTIFIER:

TYCO PART NO.
XXXXXXX-X

DATE CODE (e.g. 0425)

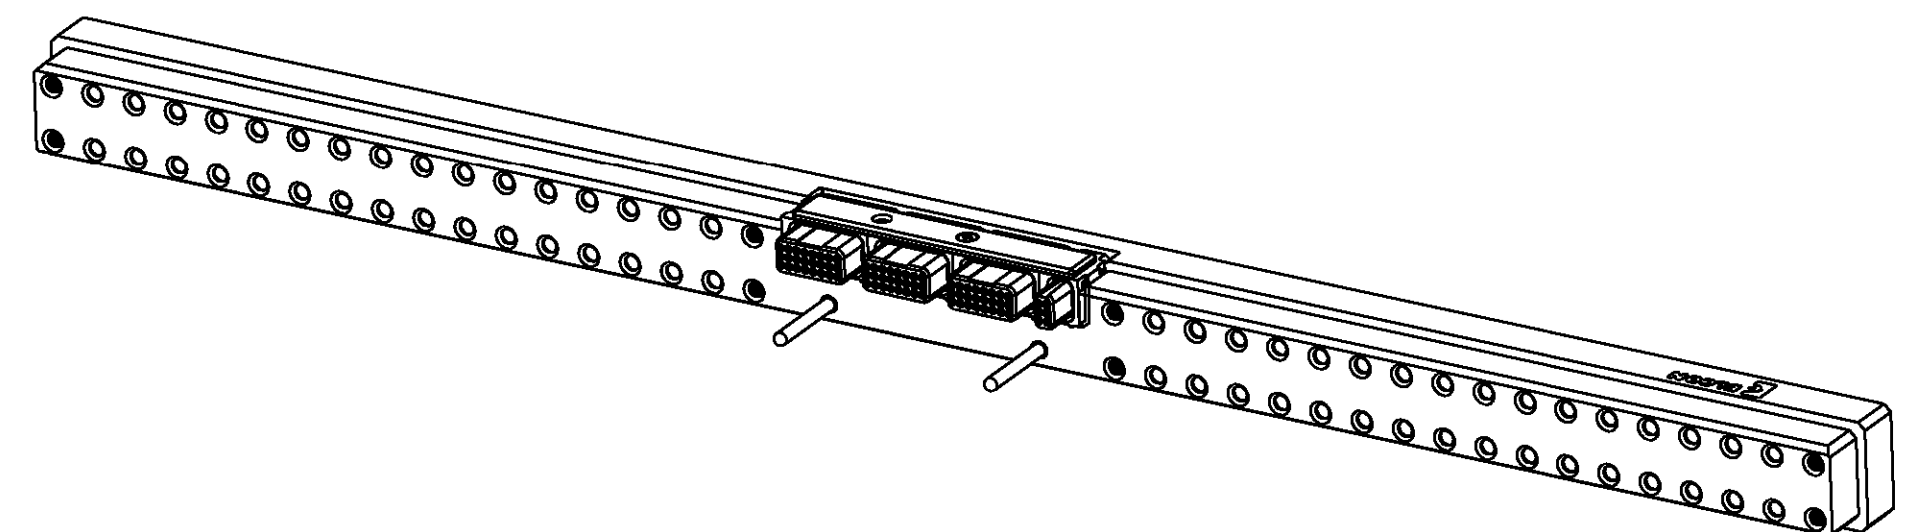

SCALE 1 : 2

AS SHOWN	6651431-2
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TWO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN 23 JAN 2007 R. GRZYBOWSKI		tyco Electronics		Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHR 23 JAN 2007 D. ORRIS		NAME	
		APVD 23 JAN 2007 S. FLICKINGER		PRODUCT SPEC		TOP ASSEMBLY, CUSTOM SOCKET, 72X POWER, 78X SIGNAL	
		-		APPLICATION SPEC		-	
		-		-		-	
		-		-		-	
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
-		-		-		-	
				A200779		C-6651431	
				CUSTOMER DRAWING		SCALE 3/4 SHEET 1 OF 1 REV A	