


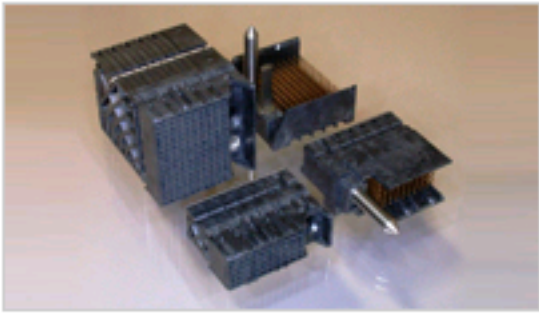

2143012-3 Product Details

[Share](#) | [Print](#) | [Email](#)


Impact High Density Backplane Connectors

IMP100,S,H,RA2P10C,UG,OEWS39

2143012-3

TE Internal Number: 2143012-3

Active

[View 3D PDF](#)

Product Highlights [View All](#)

- Connector Style = Header
- 40/Signal, 20/Ground
- 60 Positions
- Header Type = Partially Shrouded
- Board-to-Board Configuration = Right Angle

[Pricing & Availability](#)

[Request Sample](#)

[Add to My Part List](#)

[Buy Product through Distributor](#)

Feedback

[Documents](#)

[Features](#)

[Compliance](#)

Please Note:

Use the Product Drawing for all design activity

Product Type Features

PCB Mount Retention Type	Action/Compliant Tail
PCB Mount Alignment Type	None

Electrical Characteristics

Impedance (Ω)	100
Operating Voltage Reference	AC/DC
Operating Voltage (VAC)	120
Operating Voltage (VDC)	120

Dimensions

Tail Length (mm [in])	1.2 [0.047]
Length (X-Axis) (mm [in])	18.90 [0.7441]
Width (Z-Axis) (mm [in])	12.70 [0.500]
Profile Height (Y-Axis) (mm [in])	11.95 [0.470]
PCB Hole Diameter (mm [in])	0.39 [0.015]

Body Features

Header Type	Partially Shrouded
-------------	--------------------

Contact Features

Contact Type	Pin
Contact Length (mm [in])	5.50 [0.217]
Contact Plating, Termination Area, Material	Matte Tin
Contact Plating, Termination Area, Thickness (μm [μin])	1.27 [50]
Contact Base Material	Copper-Nickel-Silicon
Underplate Material	Nickel
Underplate Material Thickness (μm [μin])	1.27 [50.000]

Housing Features

Connector Style	Header
End Wall Location	Open
Housing Color	Black
Housing Material	LCP (Liquid Crystal Polymer)

Configuration Features

Connector Contact Configuration (No. of Pos./Type)	40/Signal, 20/Ground
Number of Positions	60
Number of Differential Pairs Per Column	2
Number of Columns	10
Number of Rows	6
Shrouded	Yes - Partial
Guide Location	Unguided
Tail Orientation	In-line

Industry Standards

RoHS/ELV Compliance	RoHS compliant, ELV compliant
Lead Free Solder Processes	Not relevant for lead free process
RoHS/ELV Compliance History	Always was RoHS compliant
UL Rating	Recognized
UL File Number	E28476
UL Flammability Rating	UL 94V-0
CSA Certified	Yes

Environmental

Operating Temperature (°C [°F])	-55 - +85 [-67 - +185]
---------------------------------	------------------------

Conditions for Usage

Board-to-Board Configuration	Right Angle
------------------------------	-------------

Operation/Application

Industry Application	Networking (Communications)
----------------------	-----------------------------

Packaging Features

Packaging Method	Tube
------------------	------

Other

Brand	TE Connectivity
-------	-----------------

Related Products

Not quite the product you're looking for?

[Find Similar Products](#)

[View Part in Product Feature Selector](#)

[Check for Tooling](#)

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [Global Accessibility Statement](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

