

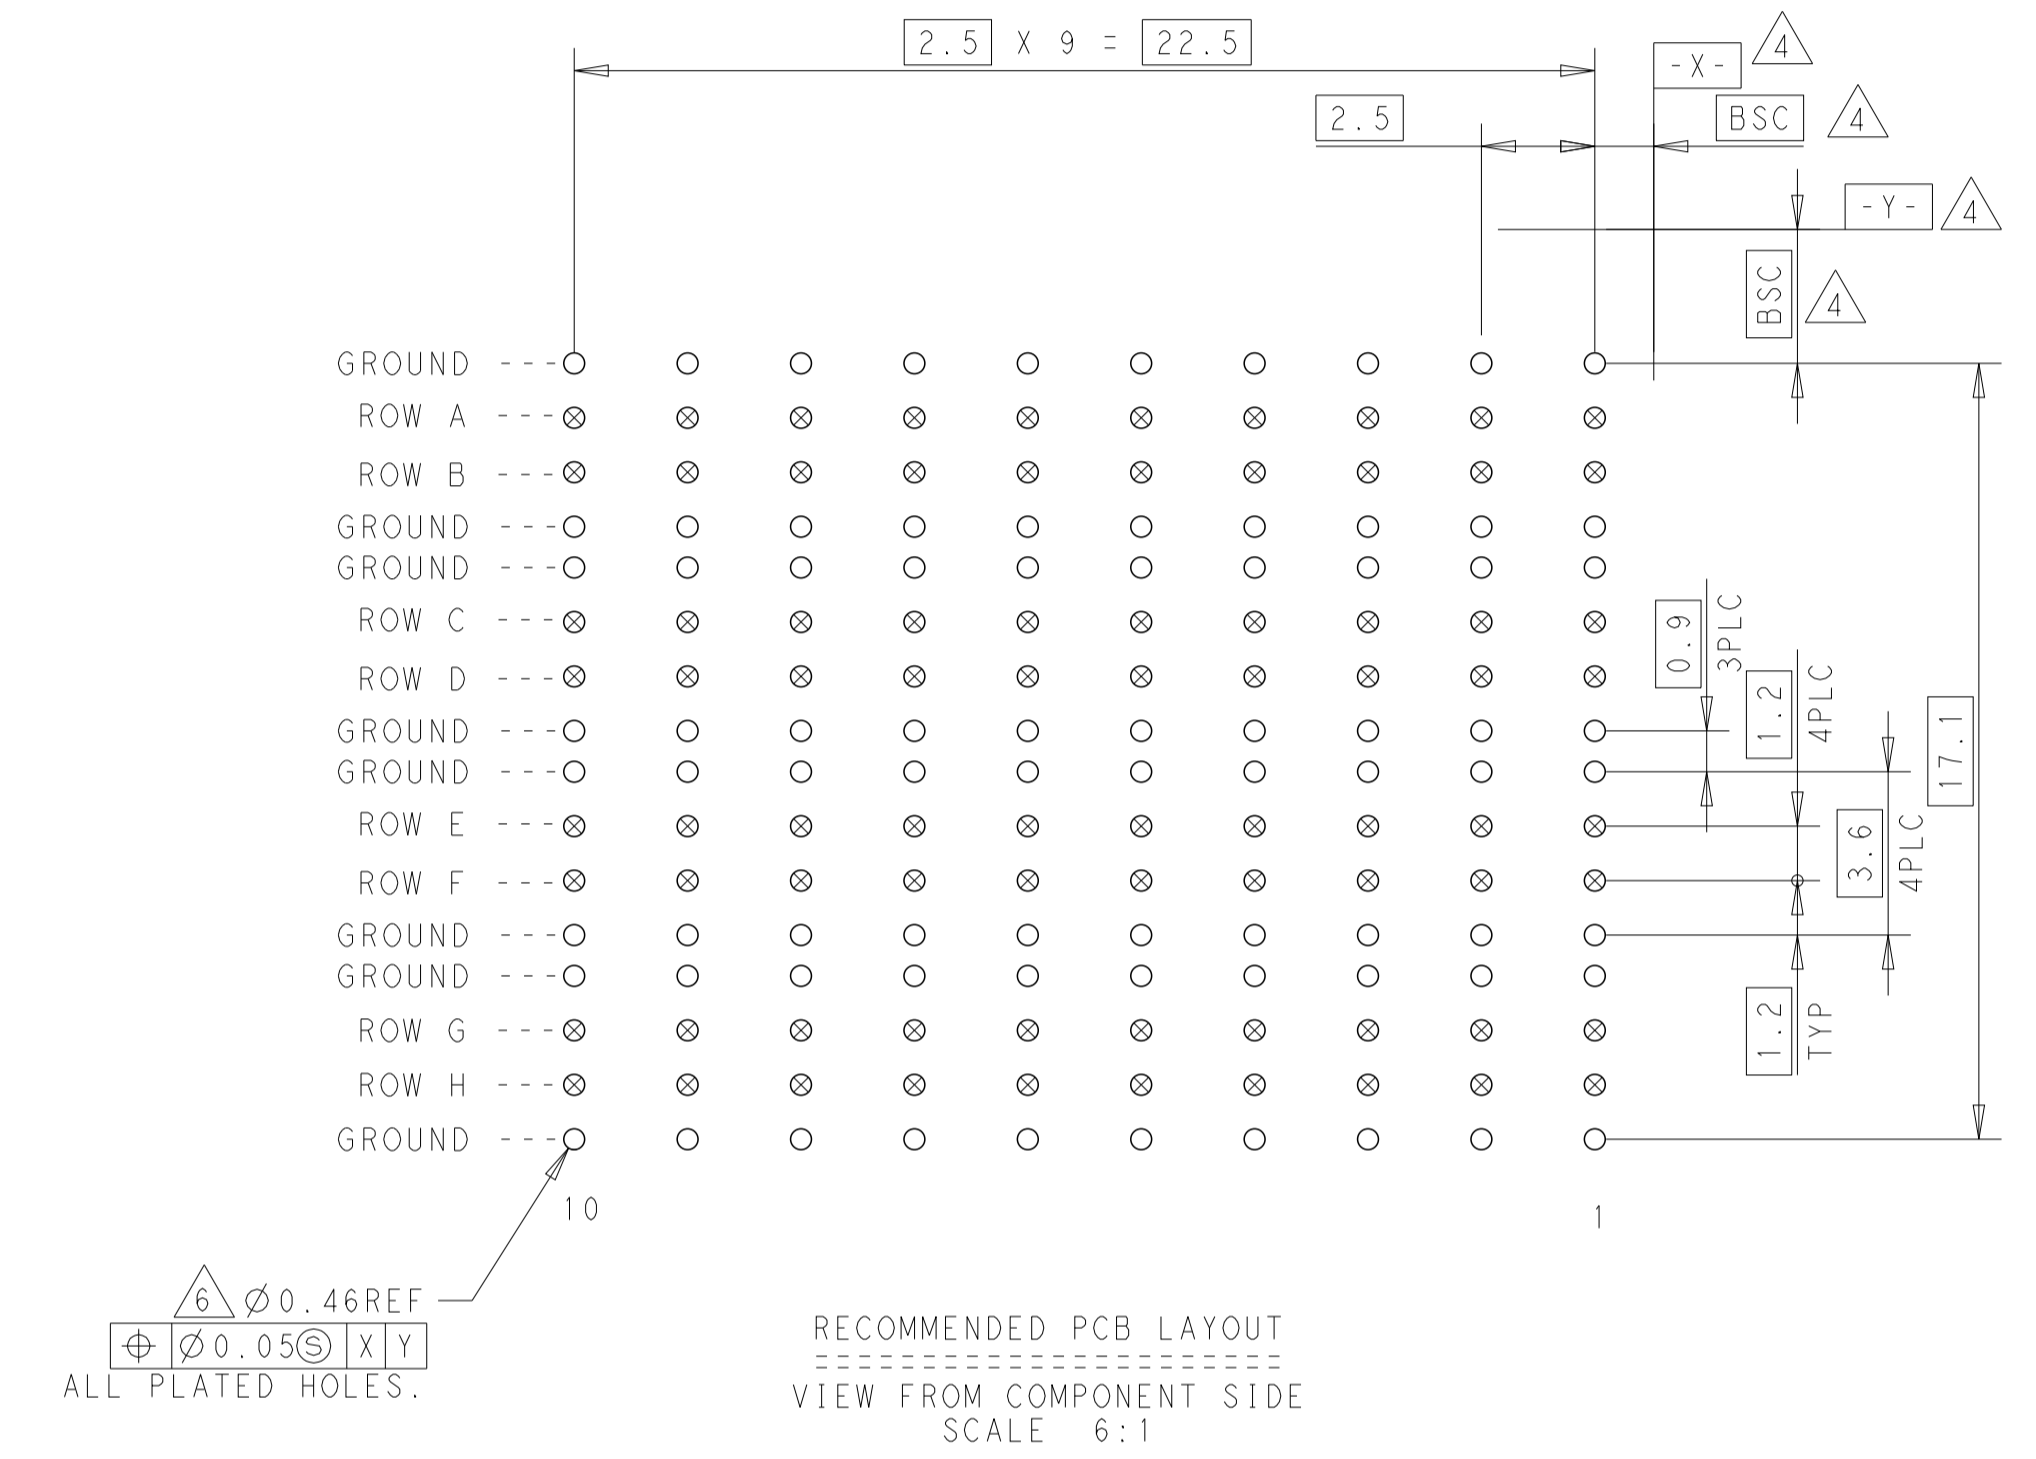
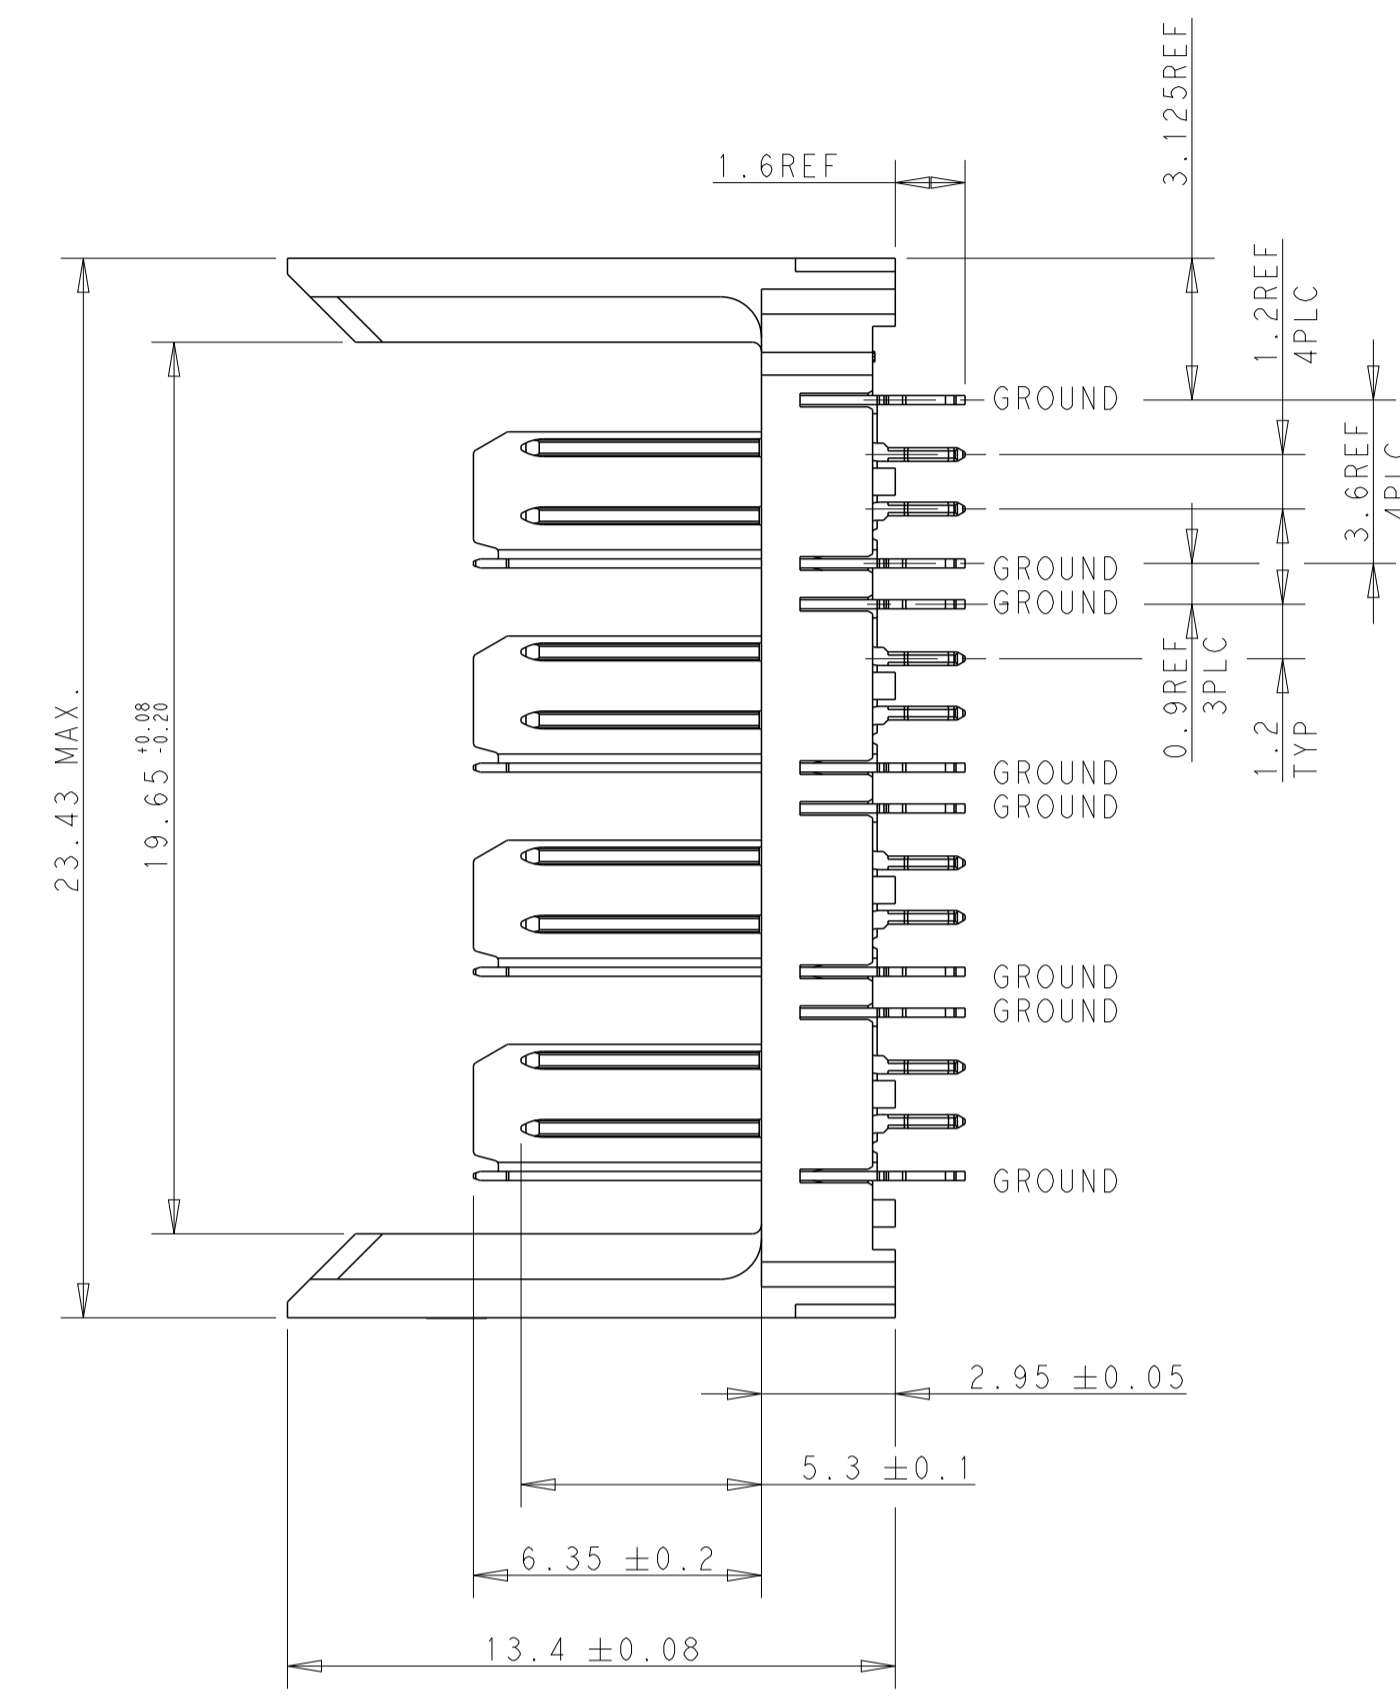


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
A		INITIAL RELEASE	7JAN2013	D.S	A.C		

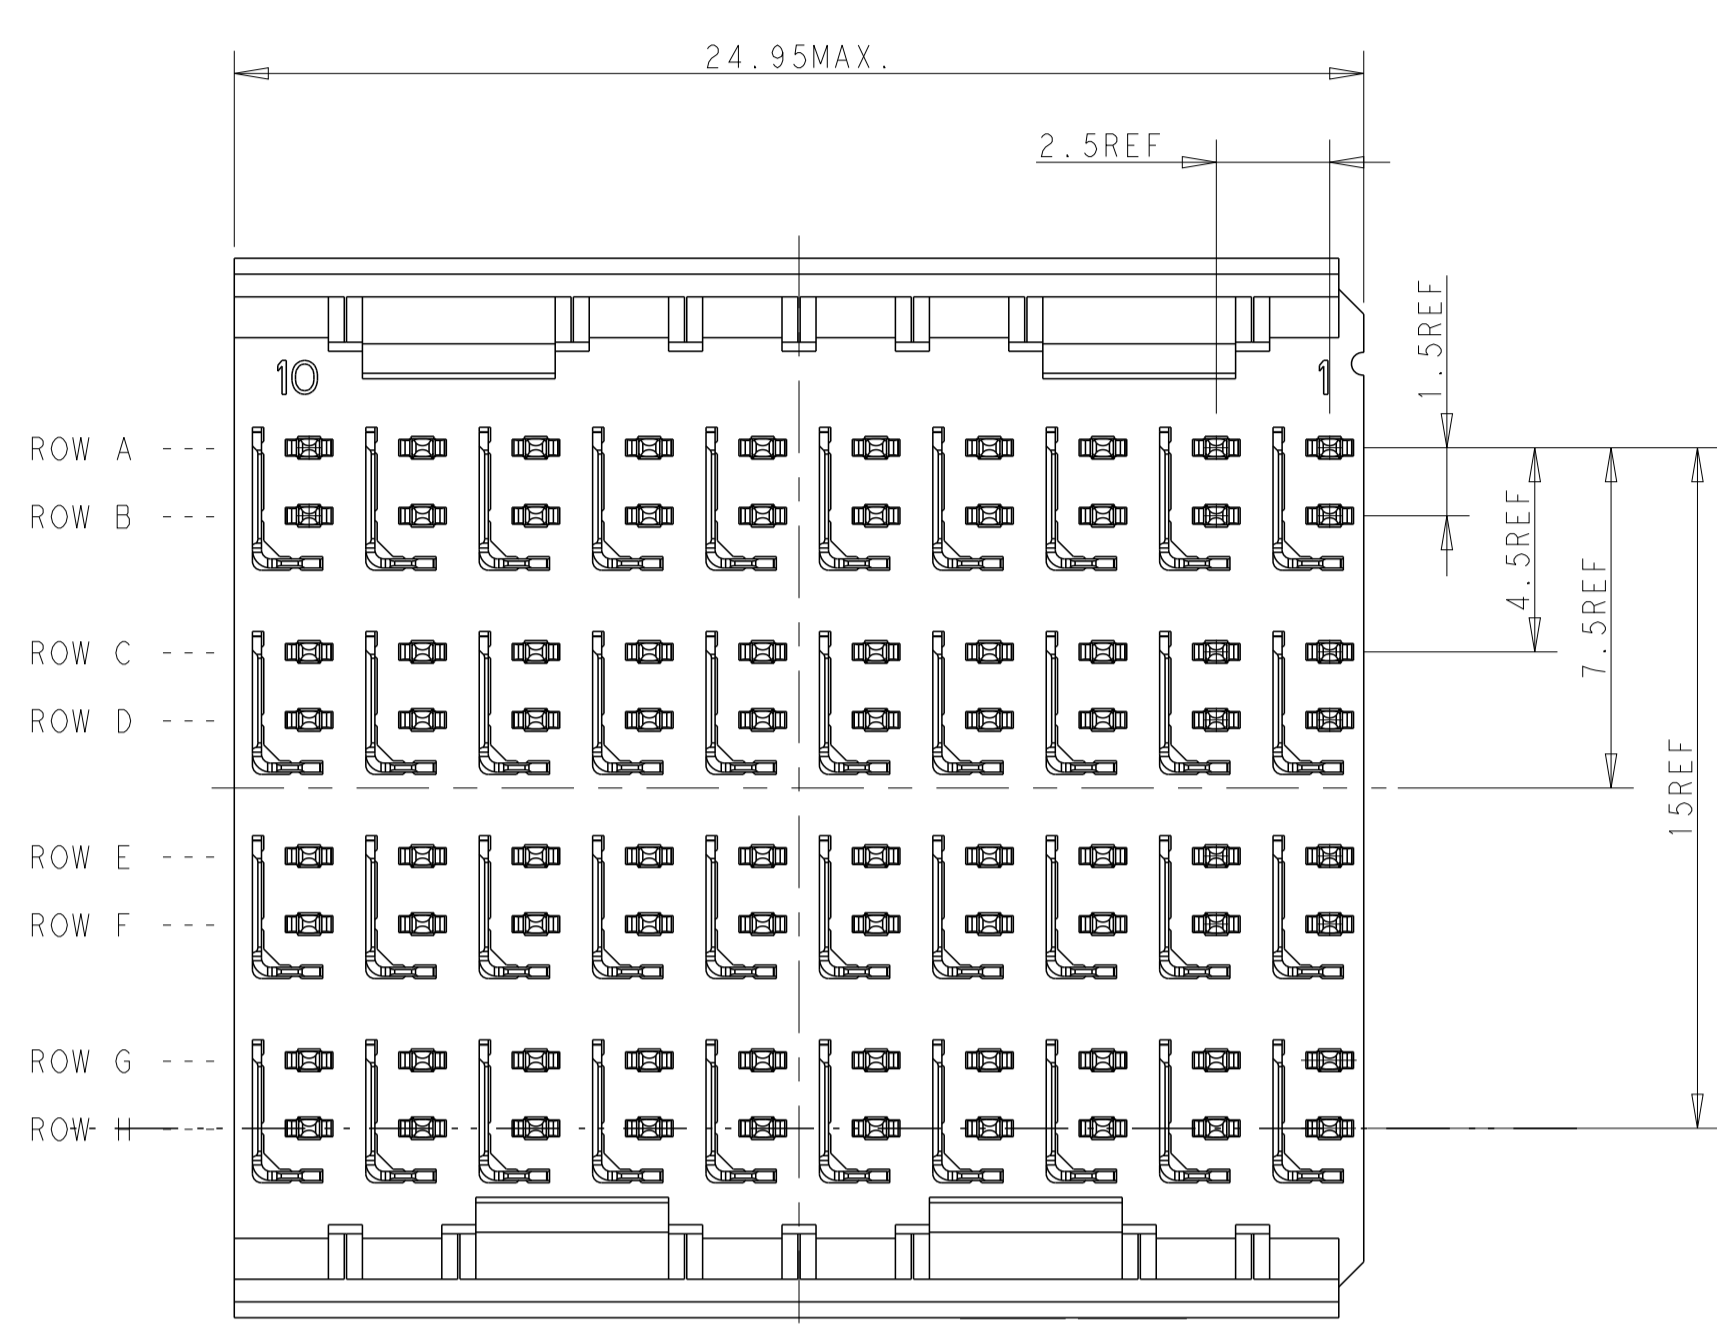

6 Ø0.46 REF
 Ø0.05 X Y
 ALL PLATED HOLES.

RECOMMENDED PCB LAYOUT
 VIEW FROM COMPONENT SIDE
 SCALE 6:1

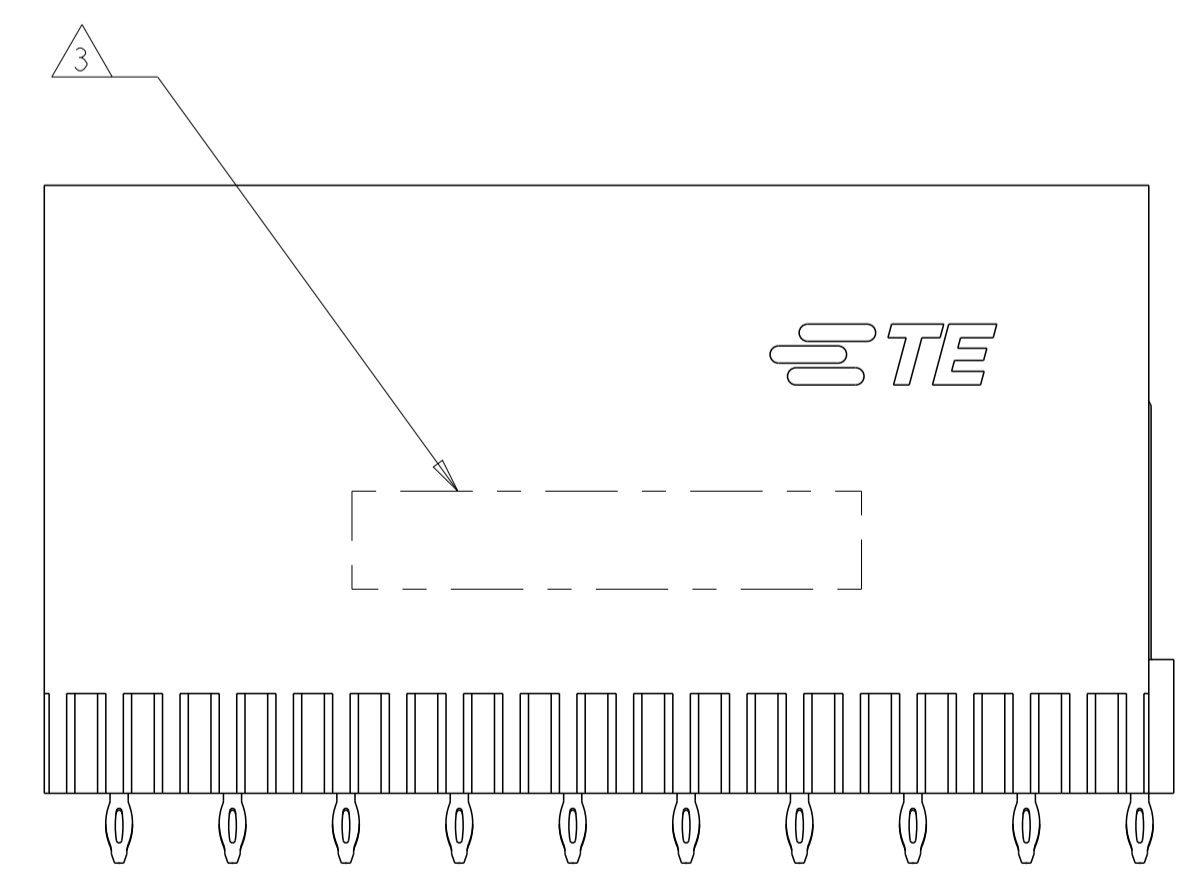

- 1 MATERIAL:
CONTACT AND SHIELD: PHOSPHOR BRONZE
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 um MIN MATTE
TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE
REFER TO APPLICATION SPEC 114-13059

2170330-1
 PART NO.

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ±0.20 3-PLC ±0.20 5-PLC ±0.20 4-PLC ±0.20 ANGLES		DWN DAVID SHEN 23APR2012 CHK SANDERS YAN 23APR2012 APVD ALEY CAI 23APR2012 PRODUCT SPEC 108-2055-1 APPLICATION SPEC 114-13059 WEIGHT CUSTOMER DRAWING		NAME ASSEMBLY DRAWING 4 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER SIZE A1 CAGE CODE DRAWING NO. C=2170330 RESTRICTED TO	
MATERIAL: 1		FINISH: 2		SCALE 1:1 SHEET 1 OF 1 REV A		STE CONNECTIVITY	