


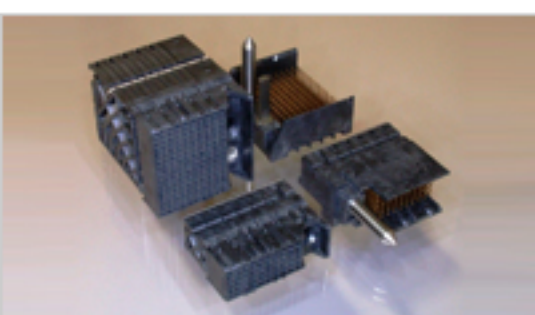


[Home](#) > [Products](#) > [Two-Piece High-Speed Connectors](#) > [Product Feature Selector](#) > [Product Details](#)

2132540-3 Product Details

[Share](#) | [Print](#) | [Email](#)


Impact High Density Backplane Connectors

IMP100,S,H,V3P6C,UG,DEW39

2132540-3

TE Internal Number: 2132540-3

Preliminary

Product Highlights [View All](#)

- Connector Style = Header
- 36/Signal, 18/Ground
- 54 Positions
- Header Type = Fully Shrouded
- Board-to-Board Configuration = Right Angle, Vertical

- [Pricing & Availability](#)
- [Request Sample](#)
- [Add to My Part List](#)
- [Buy Product through Distributor](#)

[Documents](#) | [Features](#) | [Compliance](#)

Related Products

Not quite the product you're looking for?
[Find Similar Products](#)

[View Part in Product Feature Selector](#)

[Check for Tooling](#)

+ Feedback

Please Note:
Use the Product Drawing for all design activity

| Product Type Features | |
|--------------------------|-----------------------|
| PCB Mount Retention Type | Action/Compliant Tail |
| PCB Mount Alignment Type | None |

| Electrical Characteristics | |
|-----------------------------|-------|
| Impedance (Ω) | 100 |
| Operating Voltage Reference | AC/DC |
| Operating Voltage (VAC) | 120 |
| Operating Voltage (VDC) | 120 |

| Dimensions | |
|-----------------------------------|---------------|
| Tail Length (mm [in]) | 1.2 [0.047] |
| Length (X-Axis) (mm [in]) | 14.10 [0.555] |
| Width (Z-Axis) (mm [in]) | 16.70 [0.657] |
| Profile Height (Y-Axis) (mm [in]) | 11.95 [0.470] |
| PCB Hole Diameter (mm [in]) | 0.39 [0.015] |

| Body Features | |
|---------------|----------------|
| Header Type | Fully Shrouded |

| Contact Features | |
|---|-----------------------|
| Contact Type | Pin |
| Contact Length (mm [in]) | 5.50 [0.217] |
| Contact Plating, Termination Area, Material | Matte Tin |
| Contact Plating, Termination Area, Thickness (μm [μin]) | 1.27 [50] |
| Contact Base Material | Copper-Nickel-Silicon |
| Underplate Material | Nickel |
| Underplate Material Thickness (μm [μin]) | 1.27 [50.000] |

| Housing Features | |
|-------------------|------------------------------|
| Connector Style | Header |
| End Wall Location | Dual |
| Housing Color | Black |
| Housing Material | LCP (Liquid Crystal Polymer) |

| Configuration Features | |
|--|----------------------|
| Connector Contact Configuration (No. of Pos./Type) | 36/Signal, 18/Ground |
| Number of Positions [?] | 54 |
| Number of Differential Pairs Per Column | 3 |
| Number of Columns | 6 |
| Number of Rows [?] | 9 |
| Shrouded | Yes |
| Guide Location | Unguided |
| Tail Orientation | In-line |

| Industry Standards | |
|---|--------------------------------------|
| RoHS/ELV Compliance [?] | Not reviewed for ELV/RoHS compliance |
| Lead Free Solder Processes [?] | Not relevant for lead free process |
| UL Rating | Recognized |
| UL File Number | E28476 |
| UL Flammability Rating | UL 94V-0 |
| CSA Certified | Yes |

| Environmental | |
|---------------------------------|------------------------|
| Operating Temperature (°C [°F]) | -55 - +85 [-67 - +185] |

| Conditions for Usage | |
|------------------------------|-----------------------|
| Board-to-Board Configuration | Right Angle, Vertical |

| Operation/Application | |
|-----------------------|-----------------------------|
| Industry Application | Networking (Communications) |

| Packaging Features | |
|--------------------|------|
| Packaging Method | Tube |

| Other | |
|-------|-----------------|
| Brand | TE Connectivity |

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [Global Accessibility Statement](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

