




## 5558524-1 Product Details

Share | Print | Email

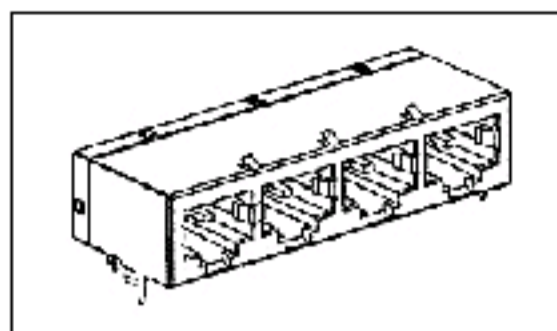

5558524-1

TE Internal Number: 5558524-1  
Active

### PCB Mounted Jacks - Single Port, Multi-port and Stacked

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Connector
- Preloaded
- Multiple Port Configuration
- 1 x 4 Jack Configuration
- Jack Type = RJ45

[View all Features](#)

#### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [MODULAR JACK ASSEMBLY, 4 PORT, 8 POSITION, RIGHT ANG...](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- [High Performance Modular Plugs & Jacks, PCB Mounted](#) (PDF, English)

#### Application Specifications:

- [Modular Jacks](#) (PDF, English)

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Termination Method to PC Board = Solder
- Performance Category = Cat 5e
- LED = Without
- Grounding Options = Panel Ground and PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black
- Shield Material = Copper Zinc Alloy

#### Mechanical Attachment:

- Panel Mount Retention = Without

#### Electrical Characteristics:

- Shielded = Yes

#### Termination Features:

- Solder Tail Contact Plating = Tin over Nickel

#### Dimensions:

- PCB Tail Length (mm [in]) = 3.56 [0.140]

#### Body Features:

- Inverted Jack Face = No
- Shield Plating = Tin over Copper
- Number of Contacts Loaded, RJ45 (8 Positions) = 8
- PCB Ground Tab Location (mm [in]) = 4.57 [0.180]

#### Contact Features:

- Contact Plating, Mating Area, Material = Gold (50)
- Contact Base Material = Phosphor Bronze

#### Housing Features:

- Housing Material = High Temperature Nylon
- UL Flammability Rating = UL 94V-0

#### Configuration Features:

- Preloaded = Yes
- Port Configuration = Multiple
- Jack Configuration = 1 x 4
- Number of Positions = 8
- Number of Contacts Loaded = 8
- Number of PCB Ground Tabs = 3
- Number of Panel Ground Tabs = 6

#### Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Packaging Features:

- Packaging Method = Tray
- Packaging Quantity = 20

#### Product Availability:

- Region = Asia, North America

#### Other:

- Brand = AMP
- Comment = Cat 5 solder tail positions for this mod jack do not follow same number sequence as that of the traditional mod jacks.

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed

