

Automation Controls

[Top](#) | [Automation Control Components](#) | [FA Devices](#) | [Downloads](#) | [Technology](#) | [Service & Support](#) | [Sales Network](#) | [About Us](#)
[Home](#) > [Business](#) > [Industrial Devices](#) > [Automation Controls Top](#) > [FA Devices](#) > [Sensors](#) > [Light Curtains / Safety Components](#)
[English \(Global\)](#)
[Light Curtain Type 4 SF4B Ver.2](#) > [Part Number](#) > [SF4B-H36-01\(V2\)](#)

[Spec Search](#)
[Discontinued Products](#)
[RoHS](#)
[FAQ](#)


SF4B-H36-01(V2) | Light Curtain Type 4 SF4B Ver.2

Download

Get Support

Welcome, Guest

[Contact Us by Email](#)
[Contact Us by Phone](#)



*Photo may vary from actual product.

[Dimensions](#)

Product name	Light Curtain Type 4
Product name detail	Min. sensing object dia. 25 mm dia. 0.984 in type (20 mm 0.787 in beam pitch)
Product Number	SF4B-H36-01(V2) <input type="button" value="★ Add to Favorites"/>
Part Number	SF4B-H36-01(V2)
Series	Light Curtain Type 4 SF4B Ver.2

Spec Detail

As of November 01, 2012

Item	Specifications
Product name	Light Curtain Type 4
Product Number	SF4B-H36-01(V2)
Part Number	SF4B-H36-01(V2)
Features	New version with improved environmental resistance performance
No. of beam channels	36
Protective height	710 mm 27.953 in
Current consumption	Emitter: 80 mA or less Receiver: 115 mA or less
Weight(Total of emitter and receiver)	1,420 g approx.
Applicable standards:International standard	IEC 61496-1/2 (Type 4), ISO 13849-1 (Category 4, PLe), IEC 61508-1 to 7 (SIL3) (Note) PLe SIL3 compliant from production in August 2009.
	JIS B 9704-1/2 (Type 4), JIS B 9705-1 (Category 4), JIS C 0508-1 to 7 (SIL3)


Applicable standards:Japan	(Note) PLe SIL3 compliant from production in August 2009.
Applicable standards:Europe (EU)	EN 61496-1 (Type 4), EN ISO 13849-1 (Category 4, PLe), EN 61508-1 to 7 (SIL3), EN 55011, EN 50178, EN 61000-6-2 (Note) PLe SIL3 compliant from production in August 2009.
Applicable standards:North America	ANSI/UL 61496-1/2 (Type 4), ANSI/UL 508, UL 1998 (Class 2), CAN/CSA 61496-1/2 (Type 4), CAN/CSA C22.2 No.14, OSHA 1910.212, OSHA 1910.217(C), ANSI B11.1 to B11.19, ANSI/RIA 15.06 (Note) PLe SIL3 compliant from production in August 2009.
Applicable standards:China (GB)	GB 4584 (Note) PLe SIL3 compliant from production in August 2009.
Operating range	0.3 to 9 m 0.984 to 29.528 ft (Note) The operating range is the possible setting distance between the emitter and the receiver.
Min. sensing object	dia. 25 mm dia. 0.984 in opaque object (Note) When the floating blanking function is used, the size of the min. sensing object is changed.
Effective aperture angle	plus or minus 2.5degrees or less [for an operating range exceeding 3 m 9.843 ft (conforming to IEC 61496-2 / UL 61496-2)]
Supply voltage	24 V DC plus or minus 10 % Ripple P-P 10 % or less
Control outputs (OSSD 1, OSSD 2)	PNP open-collector transistor / NPN open-collector transistor (switching method) - When selecting PNP output: Max. source current 200 mA, When selecting NPN output: Max. sink current 200 mA - Applied voltage: same as supply voltage (When selecting PNP output: between the control output and +V, When selecting NPN output: between the control output and 0 V) - Residual voltage: 2.5V or less (When selecting PNP output: source current 200 mA, when selecting NPN output: sink current 200 mA) (when using 20 m 65.617 ft length cable)
Control outputs (OSSD 1, OSSD 2):Operation mode	ON when all beam channels are received, OFF when one or more beam channels are interrupted (OFF also in case of any malfunction in the light curtain or the synchronization signal) (Note) The outputs are not "OFF" when muting function is active even if the beam channel is interrupted. (Note) In case the blanking function is valid, the operation mode is changed.
Control outputs(OSSD1, OSSD2):Protection circuit	Incorporated
Response time	OFF response: 14 ms or less, ON response: 80 to 90 ms
Auxiliary output (Non-safety output)	PNP open-collector transistor / NPN open-collector transistor (switching method) - When selecting PNP output: Max. source current 60 mA, When selecting NPN output: Max. sink current 60 mA - Applied voltage: same as supply voltage (When selecting PNP output: between the auxiliary output and +V, When selecting NPN output: between the auxiliary output and 0 V) - Residual voltage: 2.5V or less (When selecting PNP output: source current 60 mA, when selecting NPN output: sink current 60 mA) (when using 20 m 65.617 ft length cable)
Auxiliary output (Non-safety output):Operation mode	OFF when control outputs are ON, ON when control outputs are OFF (Factory setting; operating mode can be changed using the SFB-HC handy-controller).
Auxiliary output (Non-safety output):Protection circuit	Incorporated
Interference prevention function	Incorporated (Note) Please use 12-core cable.
Emission halt function	Incorporated
Interlock function	Incorporated [Manual reset / Auto reset (Note)] (Note) The manual reset and auto reset are possible to be switched depending on

	the wiring status.
External device monitoring function	Incorporated
Override function	Incorporated (Note) Please use 12-core cable.
Muting function	Incorporated (Note) Please use 12-core cable.
Optional functions	Fixed blanking, floating blanking, auxiliary output switching, interlock setting changing, external relay monitor setting changing, muting setting changing, protecting, light emitting amount control (Note) In case of using optional function, the handy-controller (SFB-HC) (optional) is required. However, a handy-controller cannot be used with the SF4B-x-01 and the SF-C14EX-01.
Degree of protection	IP67 / IP65 (IEC)
Ambient temperature	-10 to +55 degrees +14 to +131 degrees Fahrenheit (No dew condensation or icing allowed), Storage: -25 to +70 degrees -13 to +158 degrees Fahrenheit
Ambient humidity	30 to 85 % RH, Storage: 30 to 95 % RH
Ambient illuminance	Incandescent light: 3,500 lx or less at the light-receiving face
Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure
Insulation resistance	20 MOhm , or more, with 500 V DC megger between all supply terminals connected together and enclosure
Vibration resistance	10 to 55 Hz frequency, 0.75 mm 0.030 in amplitude in X, Y and Z directions for two hours each
Shock resistance	300 m/s2 acceleration (30 G approx.) in X, Y and Z directions for three times each
Emitting element	Infrared LED (Peak emission wavelength: 870 nm 0.034 mil)
Material	Enclosure: Aluminium Upper / lower case: Aluminium Sensing surface: Polycarbonate / Polyester resin Cap: PBT
Connecting method	Connector
Cable length	Total length up to 50 m 164.042 ft is possible for both emitter and receiver, with optional mating cables (Note) The cable can be extended within 30 m 98.425 ft (for emitter / receiver) when two light curtains are connected in series, within 20 m 65.617 ft when three light curtains are connected in series. Furthermore, when the muting lamp is used, the cable can be extended within 40 m 131.234 ft (for emitter / receiver).
Accessories	SF4B-TR25 (Test rod): 1 No

[📏 Dimensions](#)

[🏠 Return to top](#)

🔍 Accessories (Option)

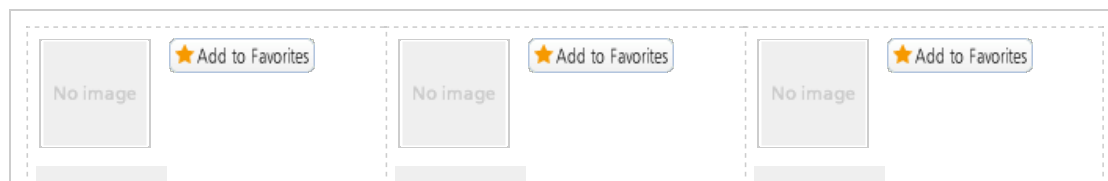

Product name	-	Product name	-	Product name	-
Product Number	FC-SFBH-36	Product Number	MC-SFBH-36	Product Number	MC-SFBH-36-T
Part Number	FC-SFBH-36	Part Number	MC-SFBH-36	Part Number	MC-SFBH-36-T
Series	Protective cover	Series		Series	Protection bar set

[More](#)

[Return to top](#)

Download

- [CAD](#)
- [Catalog](#)
- [Manual](#)
- [Software](#)

Get Support

- [Contact Us by Email](#)
- [Sales](#)
- [FAQ](#)

Customer Satisfaction Survey Questionnaire

Please help us improve our website by completing our online survey.

Panasonic Automation Controls Business Unit are always looking to make our website more user-friendly and comfortable for you.


We aim to use feedback positively to improve our website, please give us comments or requests you may have.

*If you need an answer to your feedback from us, please [click here](#).

Please take a few moments to answer these questions about our website. Thank you.

- Easy to understand yes no
- Easy to find the information you need yes no
- Practical for your work yes no

[Comments about our website.](#)



[Home](#) [Business](#) > [Industrial Devices](#) > [Automation Controls Top](#) > [FA Devices](#) > [Sensors](#) > [Light Curtains / Safety Components](#) > [Light Curtain Type 4 SF4B Ver.2](#) > [Part Number](#) > [SF4B-H36-01\(V2\)](#)

Business Solutions

- [Communication Solutions](#)
- [Security Systems](#)
- [Personal Computer](#)
- [Professional AV](#)
- [Document & Imaging Solutions](#)
- [Terminal Solutions](#)
- [IT Solutions](#)
- [Recording Media](#)

Eco Solutions

[Eco Solutions](#)

Healthcare

- [In Vitro Diagnostics](#)
- [Medical Imaging](#)
- [Hospital Systems](#)
- [Home/Personal Use](#)
- [Dental clinic/Dental Laboratory](#)

ADA Media

Industrial Devices

Passive & Electromechanical Switches & Optics Components Printed Wiring Board
Communication Units, Sensors, I/O Devices Power Supplies Materials Semiconductors Storages, Supplies
Factory Automation Motors, Fans, Compressors Industrial Solutions

Batteries and Energy Products

Secondary Batteries Primary Batteries Chargers Solar Batteries Storage Battery System
Batteries for Retail and Battery Related Products

Consumer Environmental Activities About Panasonic

[Global Home](#) | [Site Map](#) | [Terms of Use](#) | [Privacy](#)

+ [Area/Country](#)



© Panasonic Corporation 2012