

1

2

3

4

5


6

7

A

A

S/R SIZE	A DIM.	B DIM.
28	6.80	6.00
29	9.00	7.00

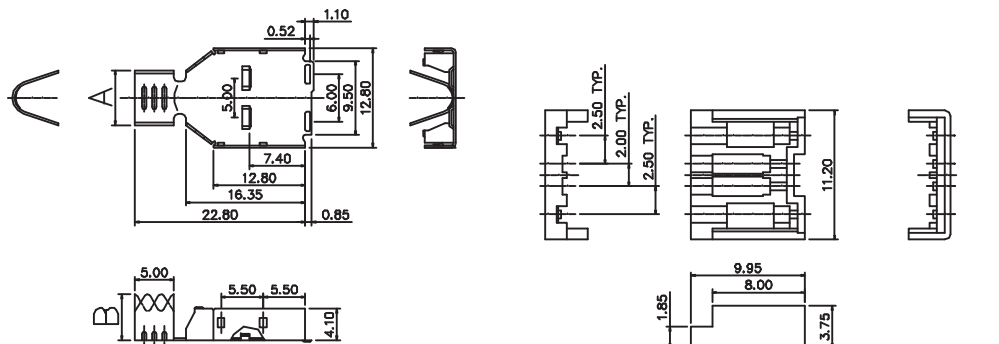

**Material:**


- Housing: PBT & Glass-Fiber, UL-94V-0
- Color: White
- Contact: Brass
- Plating: 30µ" gold
- Shell: SPCC

**Electrical:**

- Voltage Current Rating: 1AMP, 30VAC
- Insulation Resistance: 1,000MagΩ Min.
- Contact Resistance: 30MΩ Max.
- Dielectric Withstanding Voltage: AC 750V

**Environment:**

- Temperature Rating: -55°C ~ +105°C

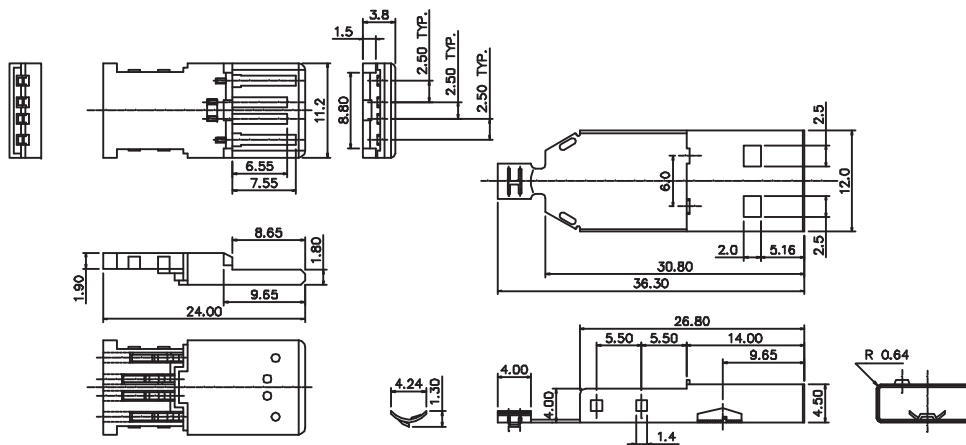

D

D

E

E

F

F

G

G

H

H

Unit: mm



Scale	Free			Date	Name	Title
TOLERANCE				Drawn	20.11.12	Wilson
X.	±0.38			Approved	21.11.12	Groll
X.X	±0.25					
X.XX	±0.13					
DIM	TOL					
X.°	±3°					
X.X°	±1.0°	Ⓢ				
Angle	TOL	Id.	Modification	Date	Name	



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title **USB Assembly Type (A)**  
180 Series, Version 2.0

ASSMANN WSW-No.  
**A-USBPA-2-R**

Drawing-No.  
rev00

Replace  
Sheet 1/1

1

2

3

4

5

6

7