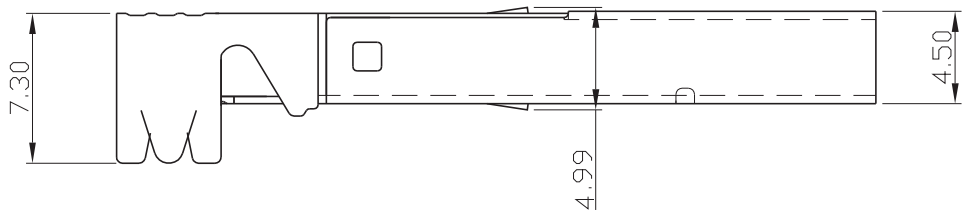

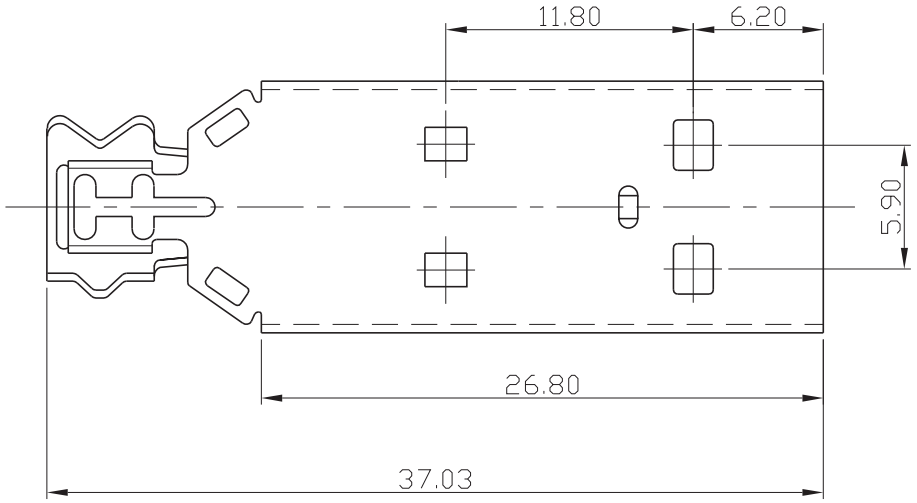

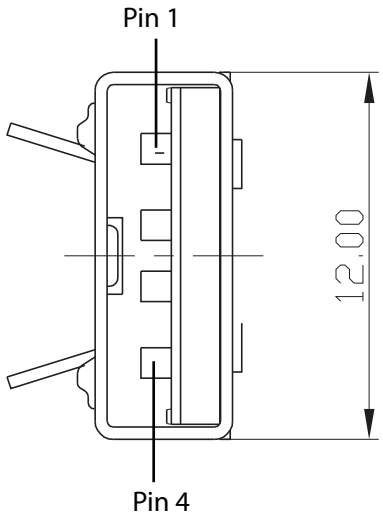

Material:

- Thermoplastic (PBT)
- Contact: Brass
- Shell: SPCC
- Contact: 5µ Gold Contact Plating
- Shell: Nickel Plating

Electrical:

- Voltage Rating: 30V
- Current Rating: 1A
- Contact Resistance Terminal: 30MΩ Max
- Dielectric Withstanding Voltage: 750V AC
- Insulation Resistance: 1000MΩ Min

Unit: MM±0.15MM

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.20.11	Chappell
Approved	10.20.11	Warner

RoHS Complaint

ASSMANN WSW components

Item No. **A-USBPA-R**

Title USB, Type A, Assembly-Type, Version 1.1

Drawing No.

rev00

Replace

Sheet