



A

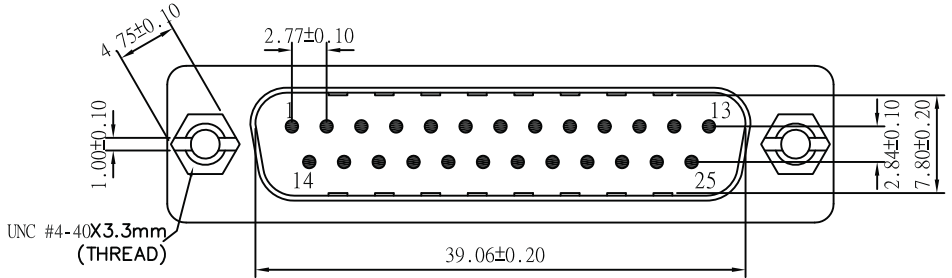


UNC #4-40 Hexscrew



Pin Out	
25P-Male	25P-Male
1	1
2	2
24	24
25	25
G	G


B

C

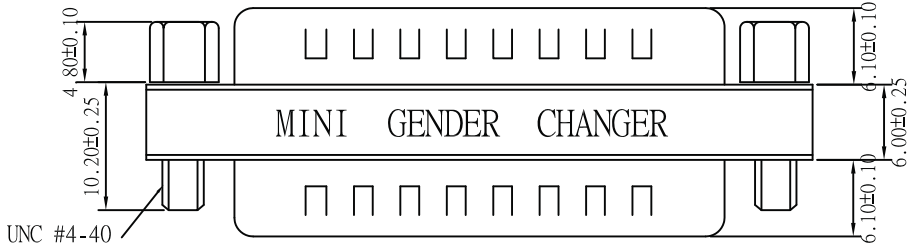

D

E

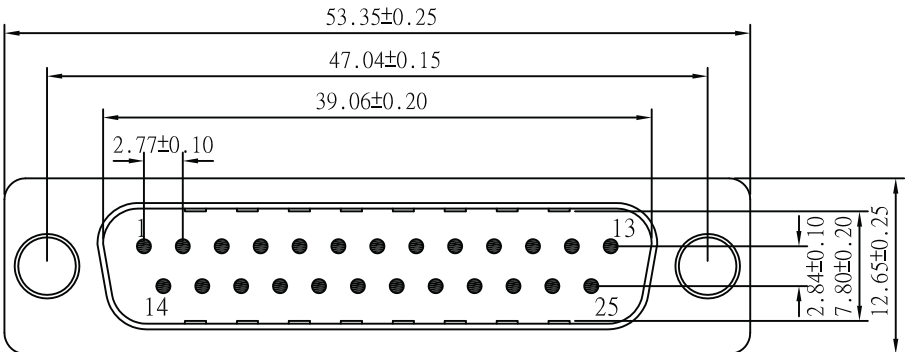

F

Material:

- Insulator: PBT Glass fibre reinforced UL 94 V0
- Contact: Brass
- Contact plating: Gold plated over nickel
- Shell: Tin plated shell
- Yellow label with black characters

Unit: MM

G

Scale	1:1						Name	Item No.
TOLERANCE						Drawn	11.22.11	AB414-R
X.X	±0.40					Approved	Chappell	
X.XX	±0.25							Title
X.XXX	±0.15							Mini Gender Changer - D-Sub 25 Pin Male <=> D-Sub 25 Pin Male
Angle	±3°							Drawing No.
								Replace
								Sheet
		Modification	Date	Name				



rev00

H