


CONDUCTOR CONSTRUCTION (N/mm) :
41/0.254S

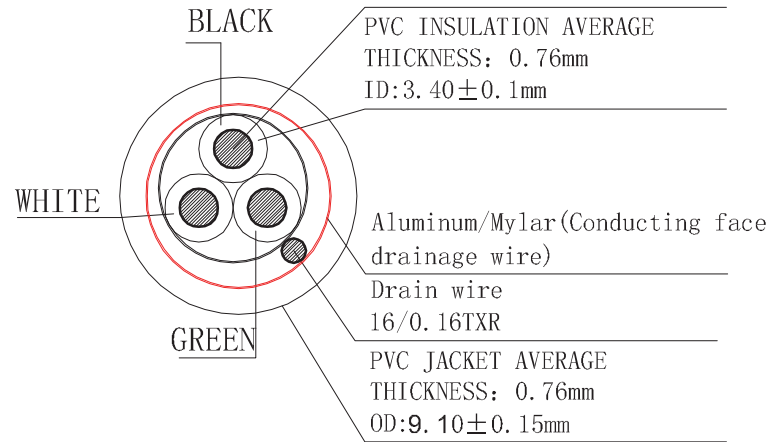

Material:

- E243929(UL) SJT 3 x 16AWG(1.31MM²) VW-1 Shielded, 60°C 300V - CSA 228191 SJT 3 x 16AWG(1.31MM²) FT2 Shielded 60°C 300V -LF-
- Jacket Color: Black
- E- Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1						Name	Item No.
TOLERANCE					Drawn	12.27.11	Chappell	AK500/16-OE-5-0.5-R
X.X	±0.40				Approved			
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								Drawing No.
								rev00
								Replace
								Sheet

