

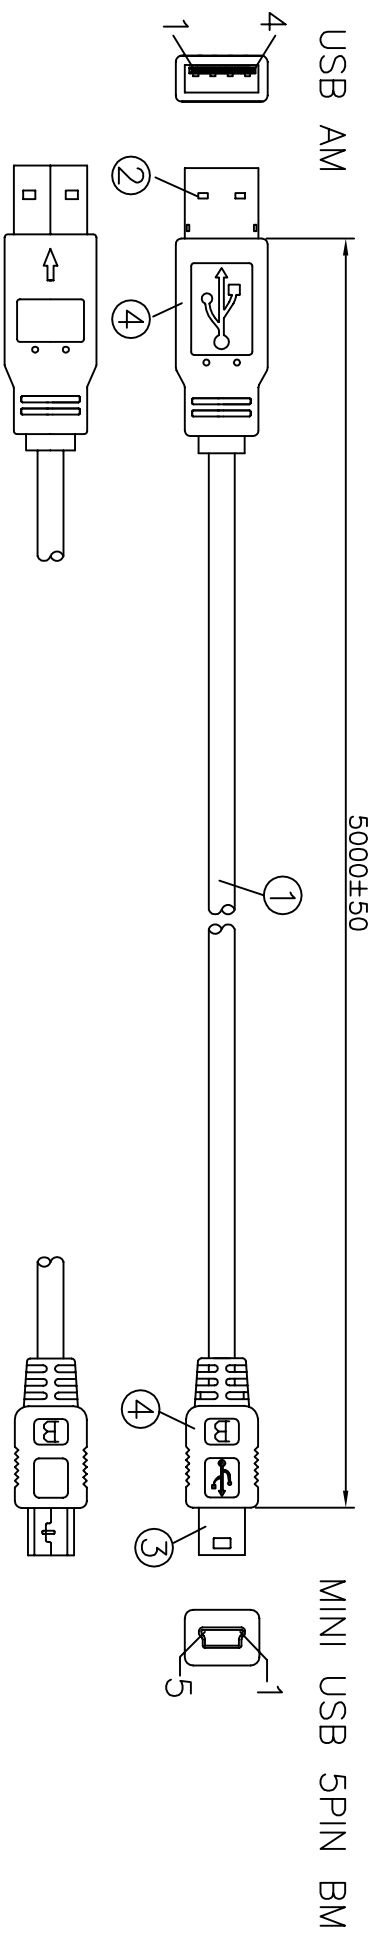


REVISION	DESCRIPTION	DATE
A	NEW	2003.04.02

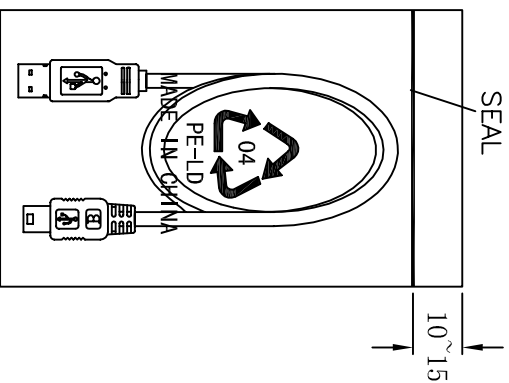

CONFIGURATION:  
 USB A M MINI USB SPIN B M

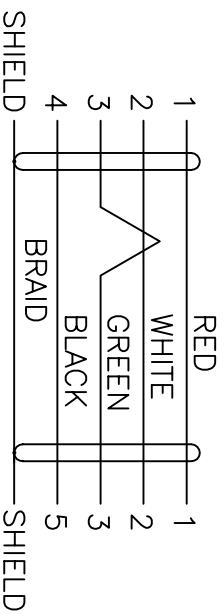

**ROHS COMPLAINT**

- ELECTRECAL TEST:
- 1.100% SHORT,OPEN,MISWIRE TEST
  - 2.CONTACTOR RESISTANCE: 5 Ohm (MAX.)
  - 3.INSULATION RESISTANCE: 10M Ohm(MIN.)
  - 4.DIELECTRIC TEST: AC 300V

④	OUTER MOLD:45P PVC COLOR:BLACK(CS-001)
③	CONNECTOR:MINI USB 5P B PLUG SOLDER TYPE 30U" REV2.0
②	CONNECTOR:USB A MALE SOLDER TYPE 30U" INSULATION:WHITE REV2.0
①	CABLE:UL2725,REV2.0 28AWG*1P+28AWG*2C+AB O.D:3.8MM PVC JACKET COLOR:BLACK(CS-001)

**DESCRIPTION**

DATE	02 APR.2003	PARTS NO	UB1262M	TIEM NO:	AK672M/2-5	DRAWN	Z.M.H	CHECK	APPRO
UNIT	MM	DRAWN NO	A923	FILE NO:	CS-QW05-A00072	<b>C'S GLORY ENTERPRISE CO.,LTD.</b>			
SCALE	NO	CUSTOMER NO.	002						