


| | |
|-----------------|----------------|
| COIL: @ 25° C | |
| RESISTANCE | 700 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.5 VDC |
| MUST RELEASE | 1.5 VDC |

CUSTOMER DATA SHEET

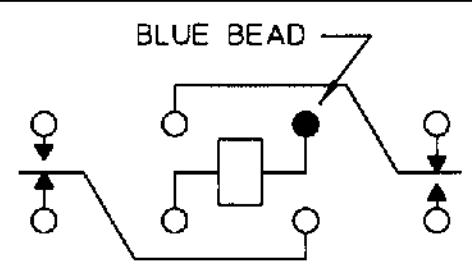

ENVIRONMENT:

| | | | | | | |
|-------------|-----|--------|------|--------------|----|-----|
| VIBRATION | 10 | CPS TO | 2000 | CPS @ | 20 | g's |
| SHOCK | 100 | g's | 6 | MS. DURATION | | |
| TEMPERATURE | -65 | °C TO | +125 | °C | | |

CONTACT RATING: LOW LEVEL TO
 5 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

NOTES: OPERATE & RELEASE TIME 4 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

DR. R.B. 6/4/98 CK. *[Signature]*



CUST. C. I. I. STD.
 CUST. NO.

TYPE HFW5A RELAY

HFW5A1106K00