




+ RELAYS, CONTACTORS & SWITCHES

TO-5/.100 GRID

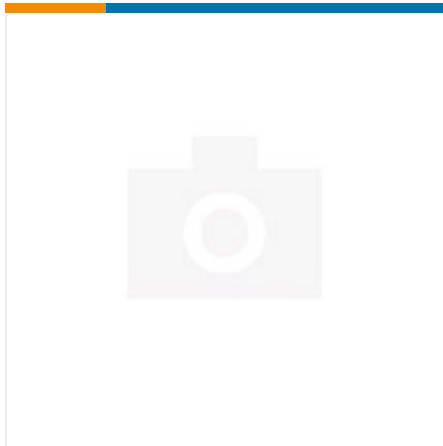

✓ Active

TE CONNECTIVITY (TE)

1MAW-5S=SPDT TO-5 RELAY

CII | 1MAD TO-5 Relay

1MAW-5S

TE Internal Number: 1-1617798-9

Not EU RoHS Compliant

Not EU ELV Compliant

Contact Arrangement 1 Form C, SPDT, 1 C/O

Input Voltage (VDC) 5

Coil Suppression Diode Without

MOSFET Driver Without

Transistor Driver Without

DOCUMENTATION —

No documentation available.

FEATURES +

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features

MOSFET Driver Without

Product Type Relay

Relay Type Military/Aerospace High Performance

Enclosure Type Hermetically Sealed

Configuration Features

Transistor Driver Without

Electrical Characteristics

Input Voltage (VDC) 5
Coil Suppression Diode Without
Coil Voltage (VDC) 5
Coil Resistance (Ω) 63
Coil Power Rating (DC) (mW) 397
Coil Polarity Protection Diode Without
Shock 75G's, 6ms
Vibration 30G's, 10 – 3000Hz
Actuating System DC
Coil Power Measurement Milliwatts
Coil Magnetic System Non-Polarized, Monostable

Contact Features

Contact Arrangement 1 Form C, SPDT, 1 C/O
Contact Current Rating (A) 1
Pin Configuration .2 x .3" Spreader Pad
Contact Current Class Low Level – 1 A

Termination Features

Termination Type Long Leads

Mechanical Attachment

Mounting Type Printed Circuit Board

Usage Conditions

Operating Temperature Range ($^{\circ}\text{C}$) -65 – 125

Statement of Compliance

Statement of Compliance

PDF