

Digi PortServer TS 4 H ME1 Rugged Serial Server



© Artisan Technology Group

**Limited Availability
Used and in Excellent Condition**

Open Web Page

<https://www.artisanng.com/99002-1>



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.

- Critical and expedited services
- In stock / Ready-to-ship
- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.



HARDENED
SERIAL SERVERS



PORTSERVER® TS MEI HARDENED

Hardened, Rugged Serial Servers for Outdoor Extended Temperatures

The PortServer TS MEI Hardened family of serial servers is designed for serial port expansion where environmental hazards demand extended safety features and operating tolerances. Extended operating temperature (-35° C to +74° C), conformal coated circuit board, NEMA TS 2 and Class 1 Div 2 certifications make these rugged serial servers ideal for use in outdoor applications. Digi's patented RealPort® COM port redirector creates a local COM or TTY port on the host computer, allowing existing software applications to work without modification.

The PortServer TS H MEI model is designed for serial-to-Ethernet connectivity in utility plants, pipelines, traffic


management facilities and other remote locations requiring extended operating temperatures.

Designed to meet NEMA TS 2 and other unique requirements in traffic management installations, the PortServer TS Hcc MEI model is ideal for network-enabling and remotely managing variable message signs, loop detectors, ramp meters or any RS-232/422/485 serial device. Specialized features include conformal coated PCA for moisture and corrosion protection, screw terminal power connector for durable and reliable power feed, and extended operating temperature tolerance.


BENEFITS

- Robust, hardened model with extended temperature tolerance (-35° C to +74° C)
- 1, 2 or 4 RS-232/422/485 switch-selectable serial ports
- Patented RealPort for COM/TTY port control and management
- Monitoring and diagnostic utility
- Data security via SSHv2 and SSL/TLS
- Easy configuration through web interface (HTTP/HTTPS)
- Tunable for low latency or optimized for throughput
- Locking barrel power connector

RELATED PRODUCTS

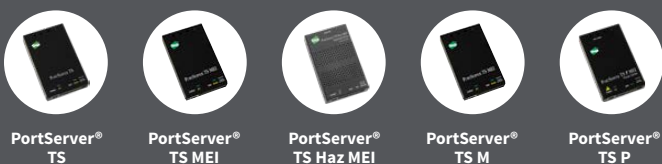

APPLICATION EXAMPLE

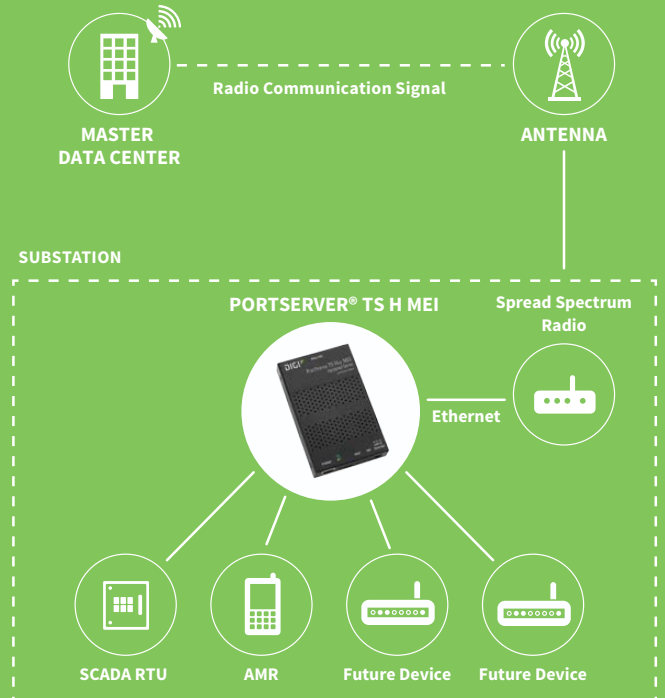

SPECIFICATIONS		PortServer® TS H MEI	PortServer TS Hcc MEI
FEATURES			
MANAGEMENT	HTTP/HTTPS, CLI, SNMP (read/write), Digi Port Authority - Remote management diagnostics and auto-discovery tool		
PROTOCOLS	UDP/TCP, DHCP/RARP/ARP-Ping for IP Address assignment, Extended Telnet RFC 2217, Telnet, Reverse Telnet, Modbus to Modbus/TCP protocol conversion support	UDP/TCP, Supports multiple unicasts, DHCP/RARP/ARP-Ping for IP Address assignment, Extended Telnet RFC 2217, Telnet, Reverse Telnet, Modbus to Modbus/TCP protocol conversion support	
SECURITY	SSHv2, SSL/TLS		
SOFTWARE	Supports Digi's Realport® COM port redirector		
EXTENDED SAFETY	N/A	Conformal coated circuit board, NEMA TS 2 compliant, Screw terminal connector for power	
STATUS LEDS	Link, Activity, Power, Status		
OPERATING SYSTEMS	AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent		
DIMENSIONS (L X W X D)	5.25 in x 3.33 in x 0.95 in (13.34 cm x 8.46 cm x 2.42 cm)		
WEIGHT	2.25 oz (64.00 g)		
OTHER	Full modem and hardware flow control, Modem emulation, Port buffering, RJ45-DB-9F console adapter included for optional serial configuration, Wall mount kit included		
INTERFACES			
SERIAL			
PORTS	1/2/4 RS-232/422/485 RJ-45 (switch-selectable); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD		
ETHERNET			
PHYSICAL LAYER	1 RJ-45 10/100 Mbps 10/100Base-T (auto-sensing); Full or half duplex		
POWER REQUIREMENTS			
POWER INPUT	9-30 VDC	9-30 VDC @ 0.5 Amps max (screw terminal power)	
POWER SUPPLY	12 VDC extended temperature power supply sold separately; Bare-wire "pigtail" power connector included	9-30 VDC @ 525 mA max	
POWER CONSUMPTION	Typical: 4 W; Max: 6 W		
PRODUCT SURGE PROTECTION (ESD)	4 kV burst (EFT) per EN61000-4-4, 2 kV surge transient per EN61000-4-5		
ENVIRONMENTAL			
OPERATING TEMPERATURE	-35° C to +74° C (-31° F to 165° F)		
STORAGE TEMPERATURE	-40° C to +85° C (-40° F to -185° F)		
RELATIVE HUMIDITY	5% to 95% (non-condensing)		
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263		
SERIAL PORT PROTECTION (ESD)	15 kV human body model		
APPROVALS			
SAFETY	UL/CUL60950, IEC60950, CB	Class 1 Division 2, UL/CL60950, IEC60950 & CB	
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A), EN55024, EN55022 Class A, AS/NZS 3548, VCCI V-3/99 .05		

PART NUMBERS	DESCRIPTION
70001917	PortServer TS 1 H MEI
70001918	PortServer TS 2 H MEI
70001919	PortServer TS 4 H MEI
70002039	PortServer TS 2 Hcc MEI
70002040	PortServer TS 4 Hcc MEI

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001210
G3/618

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisanng.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | artisanng.com

