SHEET 1 OF 1

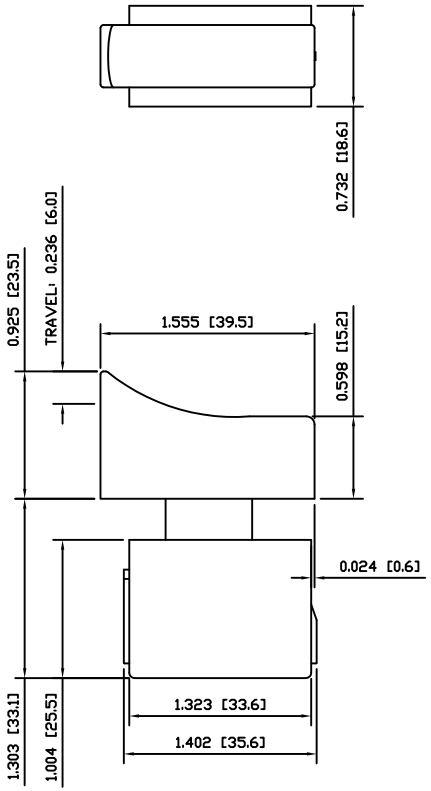

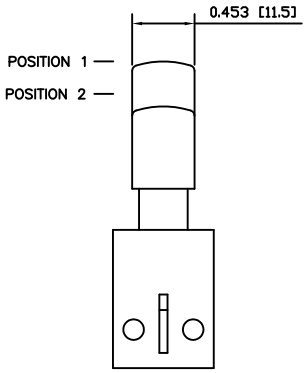



SPECIFICATIONS

FUNCTION:
2P1T OFF–(ON)

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):
18A 125VAC [cURus]
12A 250VAC [cURus]

EN61085–1:
12(10)A 250V~ 5E4 [TÜV]

OPERATING FORCE:
3.0kgf±0.5kgf

ELECTRICAL LIFE:
6,000 Cycles [cURus]
50,000 Cycles [TÜU]

APPROVALS:
cULus TÜV CE RoHS COMPLIANT

COLORS

BODY:
White

ACTUATOR:
Black

LOCK:
None

SCHEMATIC



POSITION 1 (MAINTAINED) POSITION 2 (MOMENTARY)

REFERANCE	REV.	DATE	BY
BODY	B	10/07/21	CAB
COLORS	A	09/07/10	CAB
SPECIFICATIONS	A	09/07/10	CAB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E–SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

REV.	DESCRIPTION	PCR	DATE	DRAWN BY
A	RELEASE FOR PRODUCTION	20466	02/08/12	BMA

DIMENSIONS: INCHES [MILLIMETERS]
GENERAL TOLERANCES: ±0.008 [±0.2] / ±1°
SCALE: DRAWING NOT TO SCALE
PROJECTION

E◆SWITCH® LAMB INDUSTRIES

HY15–6E7–091–0000

DRAWING NUMBER	DATE	REVISION
34–HY156E70910000	FEBRUARY 08, 2012	A