


Datasheet

Item No. 56.735.9053.0

Earth terminal WKF 35 SL/35

Ground DIN rail terminal block with spring clamp connection for mounting on TS 35, nominal cross section 35 mm², width 16 mm, colorgreen/yellow

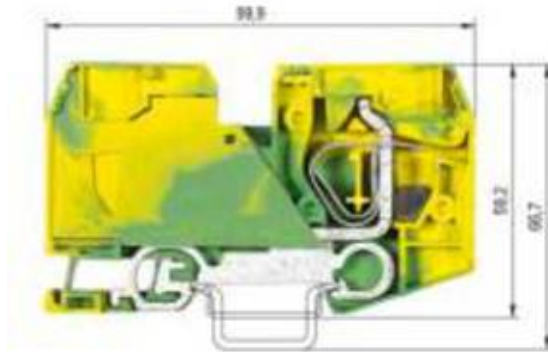

Item No.	56.735.9053.0
EAN	4015573732230
order unit	10 Piece(s)

Approvals



ATEX

Technical data

General

Nominal cross section	35 mm ²
Colour	Green/yellow
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	16 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	No

Technical data

Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	No
Length	99.9 mm
Type of insulation material	Thermoplastic

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	2.5 mm ²
Maximum cross section solid	10 mm ²
Minimum cross section fine stranded	2.5 mm ²

Maximum cross section fine stranded	35 mm ²
Minimum cross section stranded	16 mm ²
Maximum cross section stranded	35 mm ²
Wire strip length	18 mm

Technical Data UL/CSA

Cross section UL	12-2 AWG
Cross section CSA	12-2 AWG

Accessories

Item. No.	Typ:	Description:
04.343.9253.8	Warning cover ADF 35/5	Cover with warning symbol for DIN rail terminal blocks type WKF ...
98.300.0000.0	Mounting rail 35x27x7,5EN60715 2000MM	Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1000.0	Mounting rail 35x27x7,5EN60715 2000MM	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1900.0	Mounting rail 35x27x7,5EN60715 2000MM	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0000.0	Mounting rail 35x24x15 EN60715 2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0004.0	Mounting rail 35x24x15 EN60715 2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized
98.370.0000.0	Mounting rail 35x27x15(EN60715)2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.370.1000.0	Mounting rail 35x27x15(EN60715)2000MM	Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.380.0000.0	Mounting rail 35x24x15 EN60715 2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper

Drawings

16

59,5

67

99,9

50,83

>PAB-PR<

Tragschiene EN 60715 - 35 x 15
mounting rail EN 60715 - 35 x 15

Tragschiene EN 60715 - 35 x 7,5
mounting rail EN 60715 - 35 x 7,5

weitere Daten siehe Katalog
additional data are available from the catalogue

Freitoleranz nach	Maßstab	PA 6,6	CAD - Zeichnung, keine manuellen Änderungen	1. Verwendung: -	Bl. 1	von 1	Index
/	2:1	grün RAL 6021 /gelb RAL 1018	Erweitert /Mörz /Posier F.	Zeichnung Nr.	56.735.9053.0 01K		
/	/	grün RAL 6021 /gelb RAL 1018	Geprüft	Ersatz für: -			
/	/	mm ² /mm ²	NenngröÙe: -				
Werkstoff	Material / Blatt	wieland		Typ	SCHUTZLEITERKLEMME		
Änderung		Elektrische Verbindungen		WKF 35	ground wire clamp		
				SL/35	Fasis PRO 35mm ²		

Technische Daten
Technical Data

	VDE	UL	CSA
Nennspannung V rated voltage			
Nennstrom A rated current			
Anschlußbereich max. mm ² /AWG connection range	35	2	2
Nennquerschnitt 35mm ² rated cross-section 35mm ²			
Nennstromklasse UL 150 V-0 flammability rating UL 94 V-0			
Verschmutzungsgrad /Überspannungskategorie III pollution degree /overvoltage category III			

567359053001.dwg 2006/06/06 10:16:10