


Datasheet

Item No. 57.504.5255.6

Multi-tier terminal WK 4/D EU BL/V0

Multi-tier terminal block with screw connection for mounting on TS 35 and TS 32, nominal cross section 4 mm<sup>2</sup>, width 6 mm, color blue

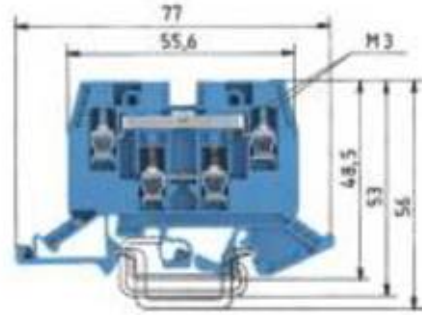

Item No.	57.504.5255.6
EAN	4015573504127
order unit	100 Piece(s)

Approvals



Technical data

General

Nominal cross section	4 mm <sup>2</sup>
Colour	Blue
Number of levels	2
Number of clamp positions per level	2
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "EEx e"	Yes
Mounting method	DIN rail (top hat rail)/G-rail
Terminal blocks for electrical installations	Yes

Technical data

Rated current	22 A
Rated voltage	320 V
Rated impulse voltage	4 kV
Pollution degree	3
Closing plate required	Yes
Length	77 mm
Type of insulation material	Thermoplastic

Connection Data

Connection type 1	Screw connection
Connection type 2	Screw connection

Minimum cross section solid	0.5 mm <sup>2</sup>
Maximum cross section solid	6 mm <sup>2</sup>
Minimum cross section fine stranded	0.5 mm <sup>2</sup>
Maximum cross section fine stranded	4 mm <sup>2</sup>
Wire strip length	9 mm
Torque conductor mounting	0.5 Nm

**Technical Data UL/CSA**

Cross section UL	22-10 AWG
Voltage UL	300
Current factory wiring	30 A
Current field wiring	30 A
Cross section CSA	20-12 AWG
Voltage CSA	600 V
Current CSA	30 A

**Accessories**

Remark to rated voltage	500V/6kV/3 with separating plate
-------------------------	----------------------------------

**Accessories**

Item. No.	Typ:	Description:
04.326.2153.8	Cover with marking facility AD VB 4 YELLOW	Cover with marking facility for cross connector for DIN rail terminal blocks type WK ...
04.342.0656.8	Cover AD VB 6/10 YELLOW	Cover for cross connector for DIN rail terminal blocks type WK ...
98.190.0000.0	Mounting rail G-32 EN60715 2000MM	Mounting rail G 32, unslotted, Höhe 5,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.190.1000.0	Mounting rail G-32 EN60715 2000MM	Mounting rail G 32, slotted, Höhe 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.210.0000.0	Mounting rail G-32 EN60715 2000MM	Mounting rail G 32, unslotted, Höhe 15 mm, length 2 m, material Aluminium
98.220.0000.0	Mounting rail G-32 EN60715 2000MM	Mounting rail G 32, unslotted, Höhe 15 mm, length 2 m, material E copper
98.300.0000.0	Mounting rail 35x27x7,5EN60715 2000MM	Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1000.0	Mounting rail 35x27x7,5EN60715 2000MM	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1900.0	Mounting rail 35x27x7,5EN60715 2000MM	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0000.0	Mounting rail 35x24x15 EN60715 2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0004.0	Mounting rail 35x24x15 EN60715 2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized
98.370.0000.0	Mounting rail 35x27x15(EN60715)2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.370.1000.0	Mounting rail 35x27x15(EN60715)2000MM	Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.380.0000.0	Mounting rail 35x24x15 EN60715 2000MM	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper
Z7.256.2227.0	Jumper bar IVK WK 4/DEU- 2	Jumper comp. insulated for DIN rail terminal blocks type WK ..., 2 -pole
Z7.256.2327.0	Jumper bar IVK WK 4/DEU- 3	Jumper comp. insulated for DIN rail terminal blocks type WK ..., 3 -pole
Z7.256.2427.0	Jumper bar IVK WK 4/DEU- 4	Jumper comp. insulated for DIN rail terminal blocks type WK ..., 4 -pole
Z7.256.2527.0	Jumper bar IVK WK 4/DEU- 5	Jumper comp. insulated for DIN rail terminal blocks type WK ..., 5 -pole
Z7.256.2627.0	Jumper bar IVK WK 4/DEU- 6	Jumper comp. insulated for DIN rail terminal blocks type WK ..., 6 -pole

Drawings

