


**Datasheet**

Art.No. 91.941.4053.0

Female connector with strain relief GST1514S B1 ZW1V WS

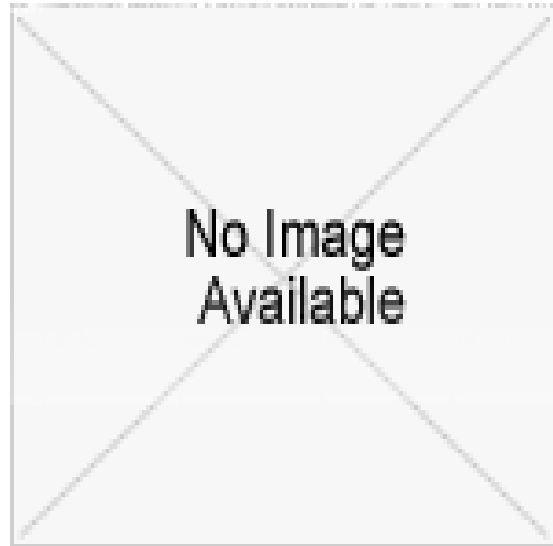

Art.No.	91.941.4053.0
EAN	4049088084683
Order unit	1 pieces

**Approvals**



**Technical data**

**General**

Rated current	16 A
Rated voltage	400 V
Rated voltage 2	250 V
Rated impulse voltage	4 kV
Strain relief	Yes
Pollution degree	2
Mechanical coding	Code 1
Interlockable	Yes
Color of coding/ contact carrier	White
Marking of poles	
Color of housing inclusive strain relief	White

**Connection Data**

Cable diameter	12.5 mm
Cable diameter 2	8.5 mm
Connection cross section solid	2.5 mm <sup>2</sup>
Cross section solid 2	0.5 mm <sup>2</sup>
Connection cross section stranded	2.5 mm <sup>2</sup>
Cross section stranded 2	0.5 mm <sup>2</sup>
Terminations per pole	1

**Model**

Model	female
-------	--------

Number of poles	4
Connection type	Screw connection
Degree of protection (IP)	IP20

**Material**

Housing material	Polyamide
Halogen free	Yes
Contact material	CuZn
Insulation components continuous temperature	100 °C
Surface finish	Silver-plated

**Dimensions**

Length	78 mm
Width	32.6 mm
Height	15 mm

