


Datasheet

Art.No. Z7.250.5227.0

Jumper bar

Cross connector, insulated for DIN rail terminal blocks type WRT ..., 2 -pole

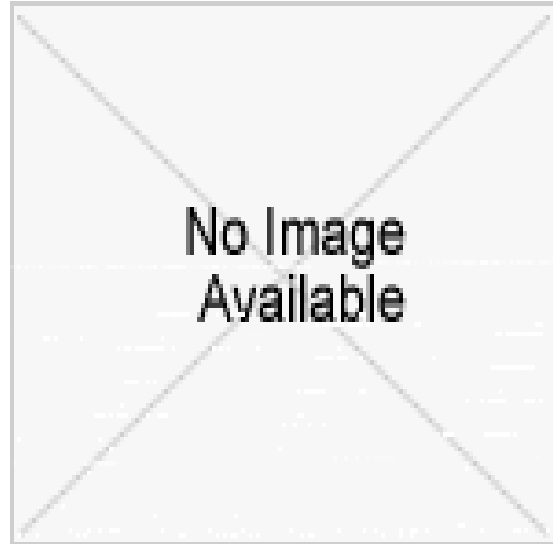

Art.No.	Z7.250.5227.0
EAN	4049088144035
Order unit	50 pieces

Approvals

Technical data

General

Colour	Black
Type	Cross connector
Modular spacing	11 mm
Number of bridged clamps	2
Mounting method	Screwable
Insulated	Yes

Accessories

Type	Cross connector
Mounting method	Screwable
Insulated	Yes
Colour	Black
Number of bridged clamps	2
Modular spacing	11 mm

Drawings

These dimensions will be especially checked at delivery
Only inspection dimensions
Bitte die nachstehenden Abmessungen besonders prüfen
Nur für die Abnahmebesonderheiten

Isolierung: PA66
insulating: PA66
Farbe: schwarz
color: black

Teile - Nr. <i>part - no.</i>	Polz. <i>poles</i>	Typ <i>type</i>	L	l
Z7.250.5227.0	2	IVB WRT 6-2	17	11
Z7.250.5327.0	3	IVB WRT 6-3	28	22
Z7.250.5427.0	4	IVB WRT 6-4	39	33

Tolerierung Size ISO 11465/Tolerance system Size ISO 11465.
(This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).

ja/yes Stoffverbot/- und Deklarationsliste nach UU-TM-05/03 ist einzuhalten.
Conformity with Wieland document UU-TM-05/03 (List of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance: GD - Zeichnung, keine manuellen Änderungen GD - drawing, no manual modifications allowed

1. Verwendung: - First Use: -

Stahl: 1 mm at 1

Zeichnung Nr./Drawing No. Index: T Z7.250.5227.0 01K

Made in mm/Dimensions are in mm

Wieland Elektrische Verbindungen

VERBINDUNGSSTEG
isoliert
insulated jumper bar