




# GFR8200HILA -- Circuit Guard® Commercial Hospital Grade GFCI Duplex Receptacle with LED Indicator

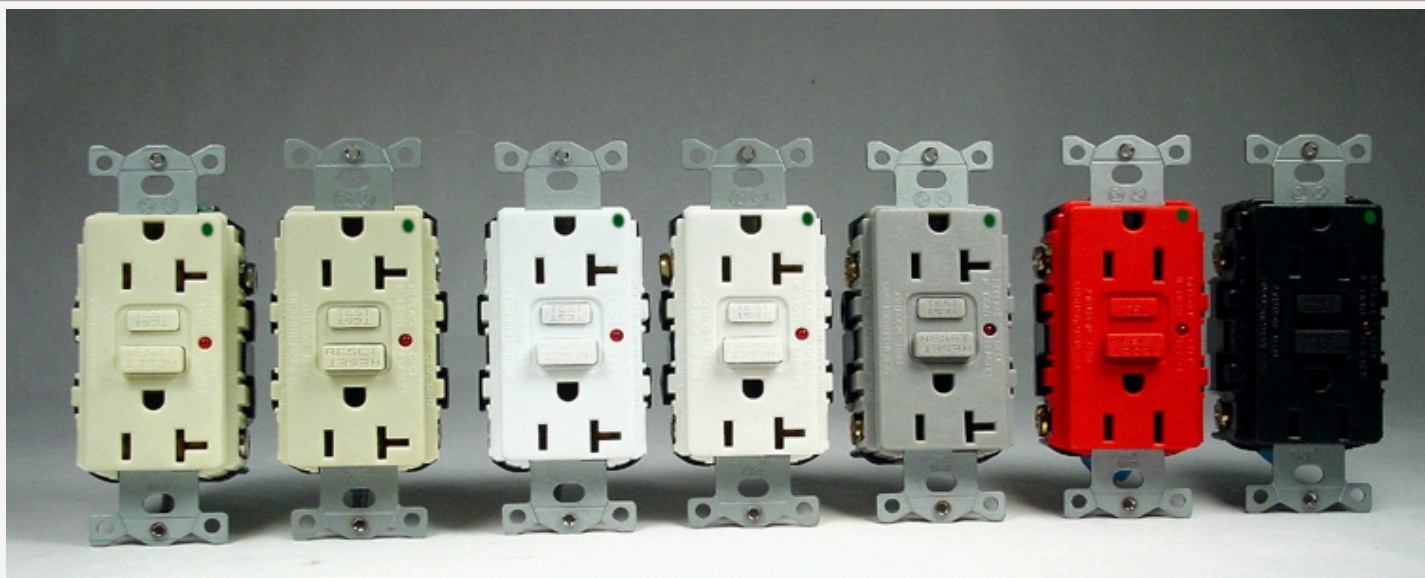

15A 125V, 2P 3W, Flush Thermoplastic Face, Back & Side Wired, Matching Wall Plate Included. GFCI functional LED, Ivory

## Product Specifications

<b>GFCI Product Type</b>	 <p>Receptacles</p>
<b>Receptacle Version</b>	LED Indicator Series Receptacle
<b>Receptacle Grade</b>	Hospital Grade
<b>Wiring Style</b>	Internal Backwire
<b>Amperage</b>	15A
<b>Color</b>	 <p>Ivory</p>
<b>Voltage</b>	125V AC
<b>Packaging</b>	Single
<b>Trip Level</b>	4-6 mA
<b>Trip Time</b>	0.025 seconds
<b>Frequency</b>	60Hz
<b>Voltage Range</b>	120V AC +10% -15%
<b>Amperage Range</b>	15A/20A, 20 Amps Feed Thru
<b>Max Humidity</b>	0.95
<b>Max Interrupting Capacity</b>	AUTOGUARD- 10,000 Amps
<b>Operating Temp</b>	Deg F -30 to 150 (Deg C -30 to 66)
<b>Codes and Standards</b>	Meets UL 943 Class A GFCIs and UL 498 for Receptacles. Complies to NEC, CEC & OSHA. UL File E-41978, CSA File LR-24886
<b>Terminal Accommodations</b>	#14 -10 AWG stranded or solid copper conductors only.
<b>Note:</b>	GFCI Receptacles should not be used in critical care patient areas or for electrical life support equipment.
<b>UPC Number</b>	78358537964
<b>Weight in LBs</b>	0.4
<b>Link to Drawing Library</b>	<a href="#">Click here for Library</a>
<b>Link to PDF Catalog</b>	<a href="#">Click here for Catalog</a>

