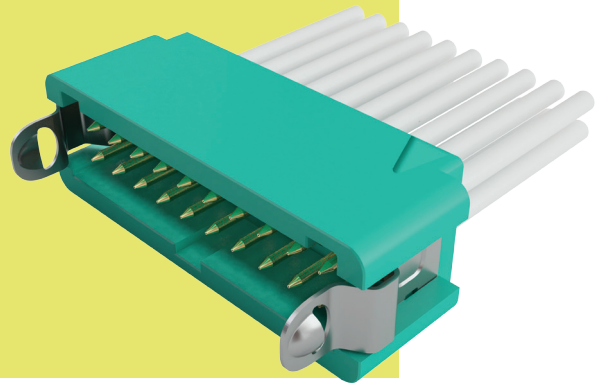




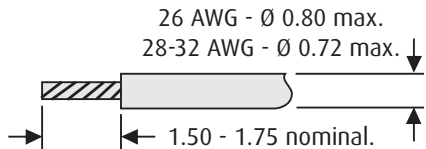
Gecko Connectors

Crimp Contacts

- ❑ 4-finger Beryllium Copper contact on a female connector.
- ❑ Crimp barrel meets all crimp guidelines and standards.
- ❑ 2A current capacity, resists high vibration and shock.
- ❑ Withstands extremes of temperature: -65°C to +150°C.
- ❑ Instruction video online at www.harwin.com/harwintv.



GECKO

CONTACTS	WIRE STRIPPING DETAILS
<p>Female</p>  <p>Male</p> 	 <p>26 AWG - Ø 0.80 max. 28-32 AWG - Ø 0.72 max.</p> <p>1.50 - 1.75 nominal.</p>

TOOLS

Recommended Crimp Tool - Z125-900
Positioner - Z125-901

Contact Insertion/Removal Tool - Z125-902
See page 12

❑ Instruction sheets available at www.harwin.com/instructions

HOW TO ORDER

G125 - XXX 00 05

SERIES CODE		FINISH
		05 Gold 

TYPE	
001	Female 26 AWG crimp contact
002	Female 28-32 AWG crimp contact
101	Male 26 AWG crimp contact
102	Male 28-32 AWG crimp contact

All dimensions in mm.

Patent Published