

Customer Information Sheet

DRAWING No.: M80-414XX98




IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

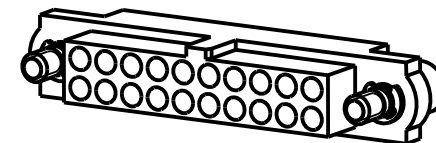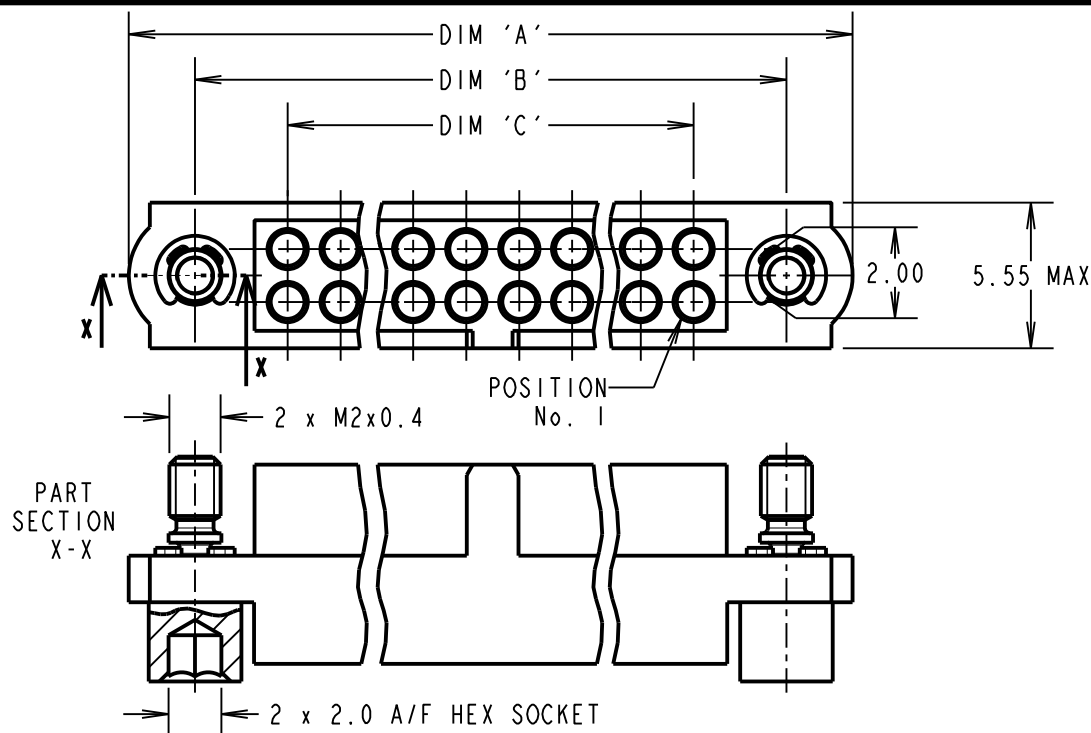

SPECIFICATIONS:

MATERIAL:

MOULDING = GLASS-FILLED PPS, UL94V-0, BLACK

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +125°C

PACKING:

BAG

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C005XX (LATEST ISSUE)

DIMENSION	CACULATION
DIM 'A'	TOTAL No. OF CONTACTS + 10.0
DIM 'B'	TOTAL No. OF CONTACTS + 5.00
DIM 'C'	TOTAL No. OF CONTACTS - 2.00
EXAMPLE: HOUSING WITH 20 POSITIONS AND FIXINGS, M80-4142098	
DIM 'A' = 30.0mm, DIM 'B' = 25.00mm DIM 'C' = 18.00mm	

ORDER CODE:

M80-414XX98

TOTAL No. OF POSITIONS: _____
04 TO 50
(EVEN NUMBERS ONLY)

NOTES:

- HOUSING TO BE USED WITH M80-2060005 CONACTACTS. CONTACTS SOLD SEPERATELY.
- FOR ASSEMBLY INSTRUCTIONS, SEE IS-25.

MGP	2	15.03.21	30424
NAME	ISS.	DATE	CN/CO
APPROVED: MGP			
CHECKED: RTP			
DRAWN: M.PERREN			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = $\pm 1\text{mm}$
X.X = $\pm 0.50\text{mm}$
X.XX = $\pm 0.20\text{mm}$
X.XXX = $\pm 0.01\text{mm}$

ANGLES = $\pm 5^\circ$

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

FEMALE T-CONTACT J-TEK
CRIMP CONNECTOR WITH
HEX SOCKET JACKSCREW

DRAWING NUMBER:

M80-414XX98

SHT
2 OF 2