



Connectors > Connector Accessories > Connector Seals & Cavity Plugs > NTSEAL Connector Cavity Plugs for Unused Cavities



Connector Seal & Plug Type: **Sealing Plug**
Cavity Diameter: **2 mm [.078 in]**
Operating Temperature Range: **-40 – 125 °C [-40 – 257 °F]**
Primary Product Color: **Green**
Primary Product Material: **PBT GF15**

[All NTSEAL Connector Cavity Plugs for Unused Cavities \(5\)](#)

Features

Product Type Features

Connector Seal & Plug Type	Sealing Plug
----------------------------	--------------

Body Features

Primary Product Color	Green
Primary Product Material	PBT GF15

Dimensions

Cavity Diameter	2 mm[.078 in]
-----------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-J58-NHMT
NTSEAL Pin Housings for Male Terminals.




TE Part # CAT-J58-NHFT
NTSEAL Socket Housings for Female Terminals.


Also in the Series | DEUTSCH NTSEAL

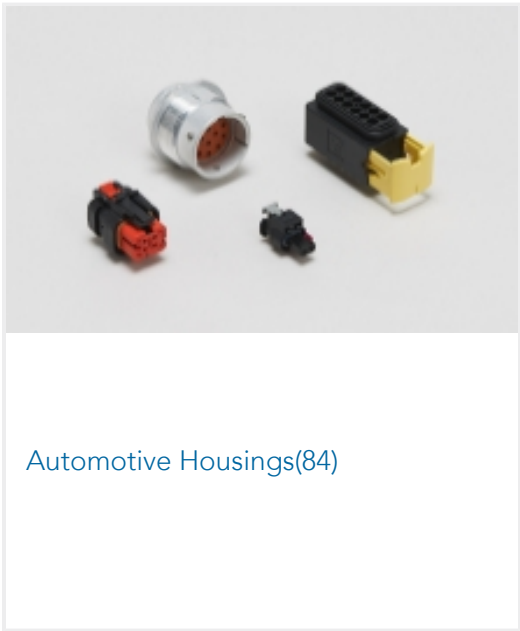


Automotive Housings(84)

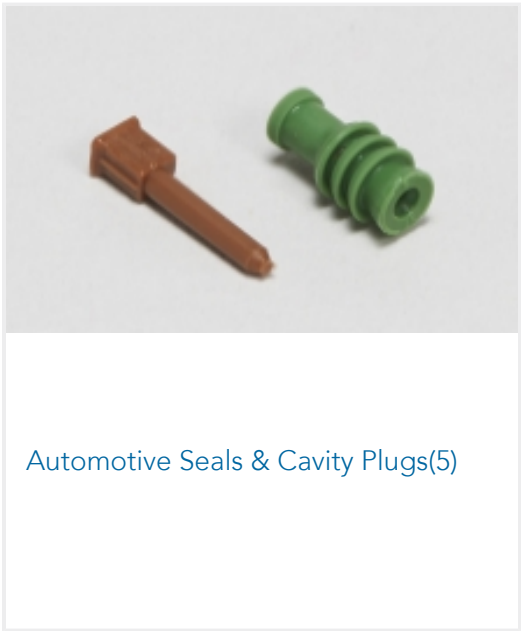

Automotive Seals & Cavity Plugs(5)

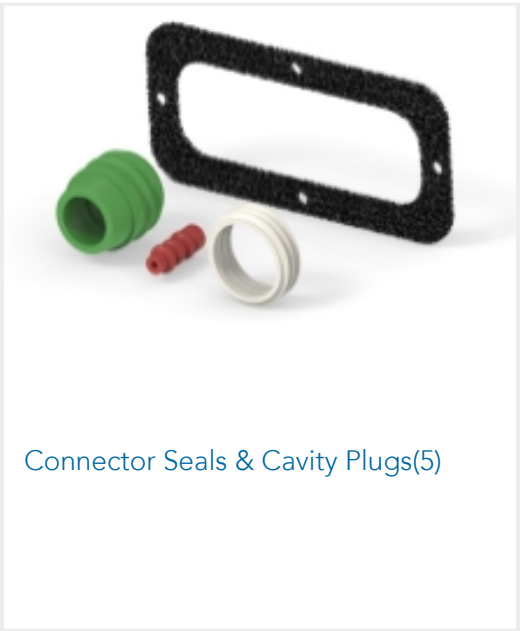

Connector Seals & Cavity Plugs(5)

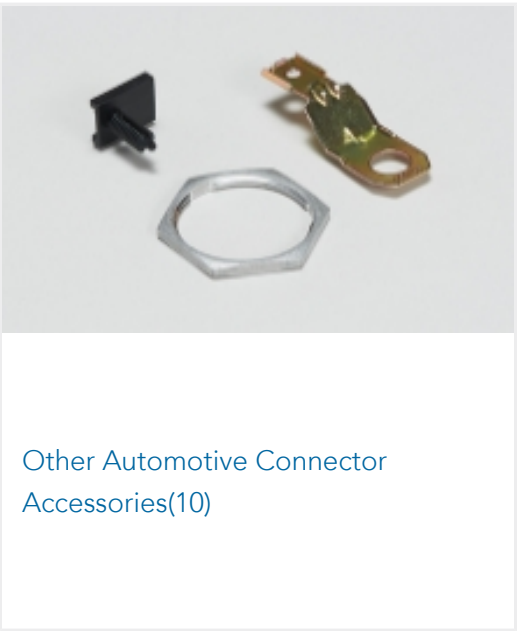

Other Automotive Connector Accessories(10)



Customers Also Bought



TE Part #CAT-J58-NHFT
NTSEAL Socket Housings for Female Terminals.



TE Part #CAT-J58-NBAC
NTSEAL connector Backshells and Caps



TE Part #CAT-J58-NHMT
NTSEAL Pin Housings for Male Terminals.



TE Part #CAT-J58-NCP
NTSEAL Connector Cavity Plugs for Unused Cavities



TE Part #2441710-1
TPA SOC HSG,2POS,CSS SIZE 16

Documents

Product Drawings

CVTY PLUG,PIN DIA 1.6,CVTY DIA,2.0,GRN

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2373921-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2373921-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2373921-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

NTSEAL Sealed Wire-to-Wire Connectors

English

Product Specifications

Application Specification

English

2373921-4

Sealing Plug, 2 mm [.078 in] Cavity Diameter, -40 – 125 °C [-40 – 257 °F], Green, PBT
GF15, DEUTSCH NTSEAL

