
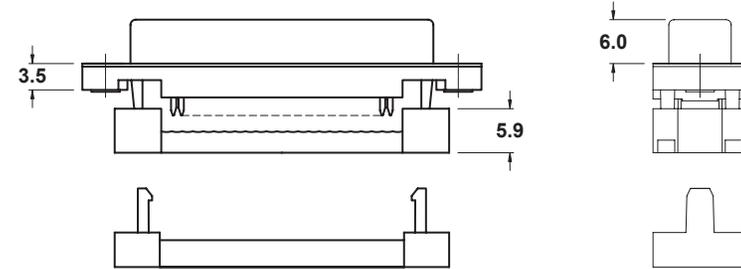
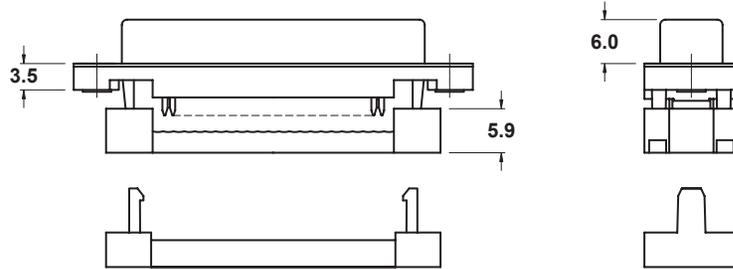
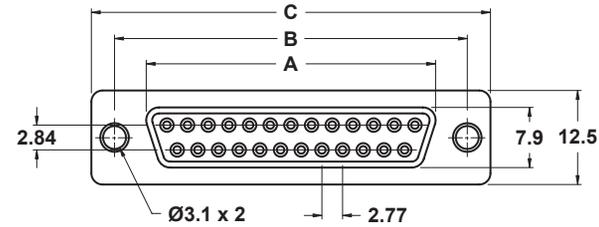


Size (Male)	A	B	C
9-pin	16.92	25.00	30.80
15-pin	25.25	33.30	39.20
25-pin	38.96	47.10	53.10
37-pin	55.42	63.50	69.40

Size (Female)	A	B	C
9-pin	16.30	25.00	30.80
15-pin	24.60	33.30	39.20
25-pin	38.30	47.10	53.10
37-pin	55.42	63.50	69.40

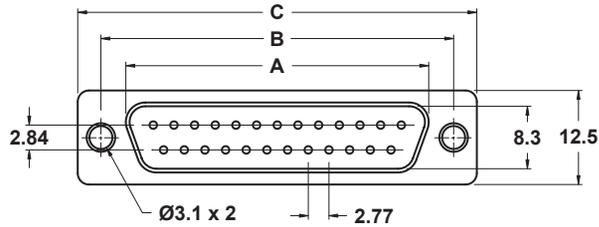

MALE

FEMALE

NOTE:

Electrical

Current Rating: 3 Amps
 Contact Resistance: < 15 Miliohms
 Insulation Resistance: > 3000 Megaohms
 Dielectric: 1000V @ 1 Minute
 Operating Temp.: -55°C to 105°C

Materials

Insulator: PBT Glass Filled UL 94V-0
 Contacts: Brass or Phosphor Bronze
 Shell: Steel
 Contact Plating: Gold Flash
 Shell Plating: Tin over Copper plating

- For .050" Ribbon Cable

TITLE		SCALE
RIBBON CABLE D-SUB		1 : 1
DRAWING NO. 30-71X & 30-72X		
		UNITS mm
FILE NAME	30-71X & 30-72X.pdf	SHEET 1/1



Mode Electronics Part Number 'multi-parts'