
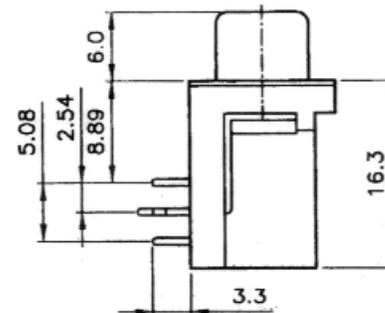


POSITION	A	B	C	D	E	F
15F	16.30	25.00	30.8	2.29	1.14	7.04
26F	24.60	33.30	39.2	2.29	1.14	6.88

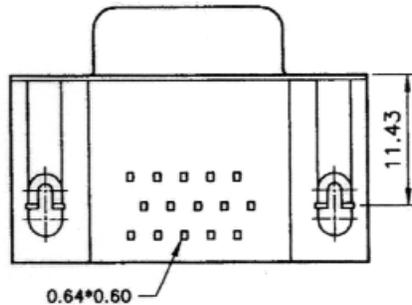


NOTE:

Electrical

Current Rating: 3 Amps
 Contact Resistance: < 15 Miliohms
 Insulation Resistance: > 3000 Megaohms
 Dielectric: 1000V @ 1 Minute
 Operating Temp.: -55°C to 105°C

Materials

Insulator: PBT Glass Filled UL 94V-0
 Contacts: Brass or Phosphor Bronze
 Shell: Steel
 Contact Plating: Gold Flash
 Shell Plating: Tin over Copper plating

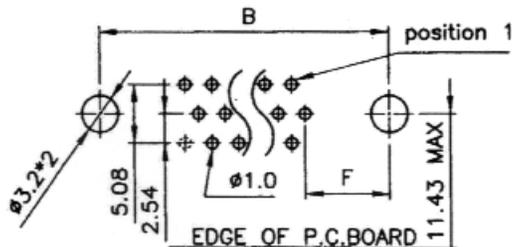

TITLE		SCALE
HIGH DENSITY RIGHT ANGLE P.C. MOUNT D-SUB (FEMALE)		NTS
DRAWING NO.	30-86X	
	UNITS	mm
FILE NAME	30-86X.pdf	SHEET 1/1