

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0460150806](#)

Status: **Active**

Overview: [Mini-Fit Plus Connector System](#)

Description: Mini-Fit® Plus Header, Dual Row, Vertical, 8 Circuits, without Snap-in Plastic Peg PCB Lock, without Drain Holes, PA Polyamide Nylon 6/6, UL 94V-2, Tin (Sn) 1.27µm Over Nickel (Ni) Plating

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-45750-001-001 \(PDF\)](#)

[Product Specification TS-5566-002-001 \(PDF\)](#)

[Packaging Specification PK-5566-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family PCB Headers
Series [46015](#)
Application Power, Wire-to-Board
Comments Current = 13A max. per circuit when header is mated to a receptacle loaded with [45750](#) Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.
[Mini-Fit Plus Connector System](#)
Overview
Product Name Mini-Fit® Plus
UPC 822350737265

Physical

Breakaway No
Circuits (Loaded) 8
Circuits (maximum) 8
Color - Resin Natural
Durability (mating cycles max) 75
First Mate / Last Break No
Flammability 94V-2
Glow-Wire Compliant No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal Copper Alloy
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 2.333/g
Number of Rows 2
Orientation Vertical
PC Tail Length 1.80mm
PCB Locator Yes
PCB Retention None
PCB Thickness - Recommended 1.78mm
Packaging Type Tray
Pitch - Mating Interface 4.20mm
Plating min - Mating 2.540µm
Plating min - Termination 1.270µm
Polarized to Mating Part Yes

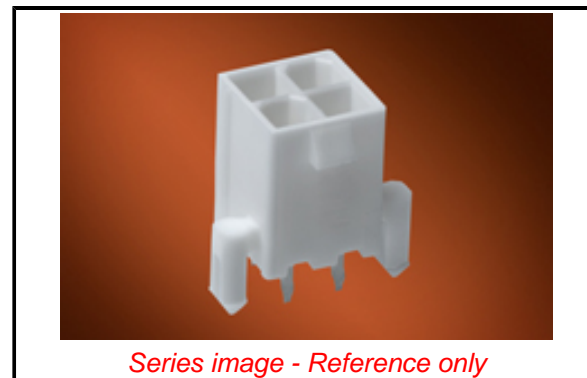

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/30/2017 (7 July 2017)

Halogen-Free Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image
ELV Not Relevant
RoHS Phthalates Not Contained

Search Parts in this Series

[46015 Series](#)

Mates With

[5557 Mini-Fit Jr.™ Receptacle Housing](#)

Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13.0A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-5566-001
Product Specification	PS-45750-001-001, TS-5566-002-001
Sales Drawing	SD-46015-001-000

This document was generated on 08/03/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION