


IXE304
 PAGE 1 OF 1
M
 DRAWING NUMBER
23
 ISSUE
 RELEASE NO. PR-15151
 REPLACES

REVISIONS
 A PR-15151
 T A D
 3 NOV 86
 B C094282
 DLM
 3 MAR 99
 CHECK KAG 5 N
 CHECK 3 NOV 86
 DRAWN
 FO-92848-A
 FORMTEK

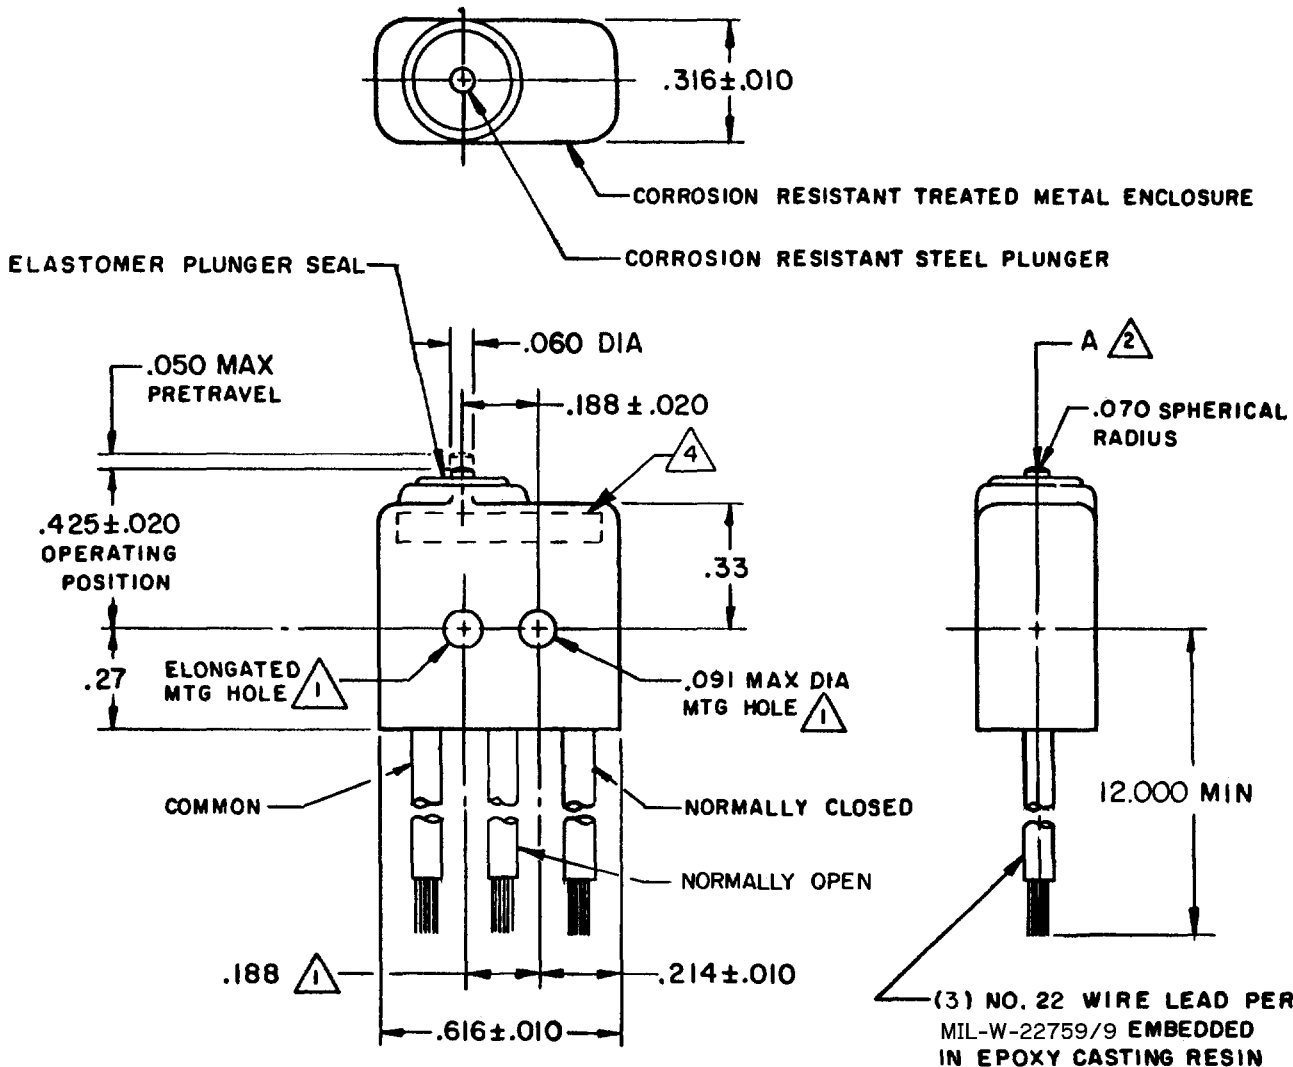


NOTES

- ① MOUNTING HOLES WILL ACCEPT $.087$ DIA PINS OR SCREWS ON $.188 \pm .002$ CENTERS
- ② ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- ③ WEIGHT OF SWITCH ONLY IS $.16$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS $.55$ OZ MAX
- ④ YELLOW MARKING IS ON BOTH SIDES OF HOUSING TO IDENTIFY THAT THIS UNIT HAS GOLD CONTACTS
- 5 - CONTACT MATERIAL - 24K SOLID GOLD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	
OPERATING FORCE	5-17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.005 MAX
OVERTRAVEL	.007 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
28 VOLTS DC RATING	
INDUCTIVE	SEA LEVEL - 1/2 AMP
	50,000 FT - 1/2 AMP
RESISTIVE	SEA LEVEL - 1 AMP
	50,000 FT - 1 AMP

SCALE	2 : 1			
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±				
	DIM.	TOL.	DIM.	TOL.
	mm	mm/in	in	mm/in
NO PLACES	X	1/64	X	0.015
ONE PLACE	X,X	0.4/016	X,X	0.001/015
TWO PLACES	X,XX	0.16/008	X,XX	0.001/015
THREE PLACES	X,XXX		X,XXX	0.15/005
ANGLES				
SI METRIC				
DESIGN UNITS	<input type="checkbox"/>		US CUSTOMARY	
			<input checked="" type="checkbox"/>	
WEIGHT	③			