

**MICRO SWITCH**

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

**ASSEMBLY-  
TOGGLE SWITCH**

(M) 6AT3  
ISSUE 9

6AT3  
PAGE 1 OF 1

M  
DRAWING NUMBER

ISSUE  
12/15

REVISIONS  
A 009429  
R. G. C.  
8 JULY 55

B CO13507  
M B F  
2 APR 59

C CO37377  
K P K  
3 AUG 76

D CO37753  
G L H  
1 NOV 76

E CO-51446  
K A G  
12 MAY 82

F 206069  
D L T  
7 AUG 02

RELEASE NO.  
H. J. A JULY 55

CHECK  
GRH 8 JULY 55


CHECK  
FVK 8 JULY 55

CHECK  
R. G. C. 8 JULY 55

CHECK  
DRAWN

RASTER

74-88

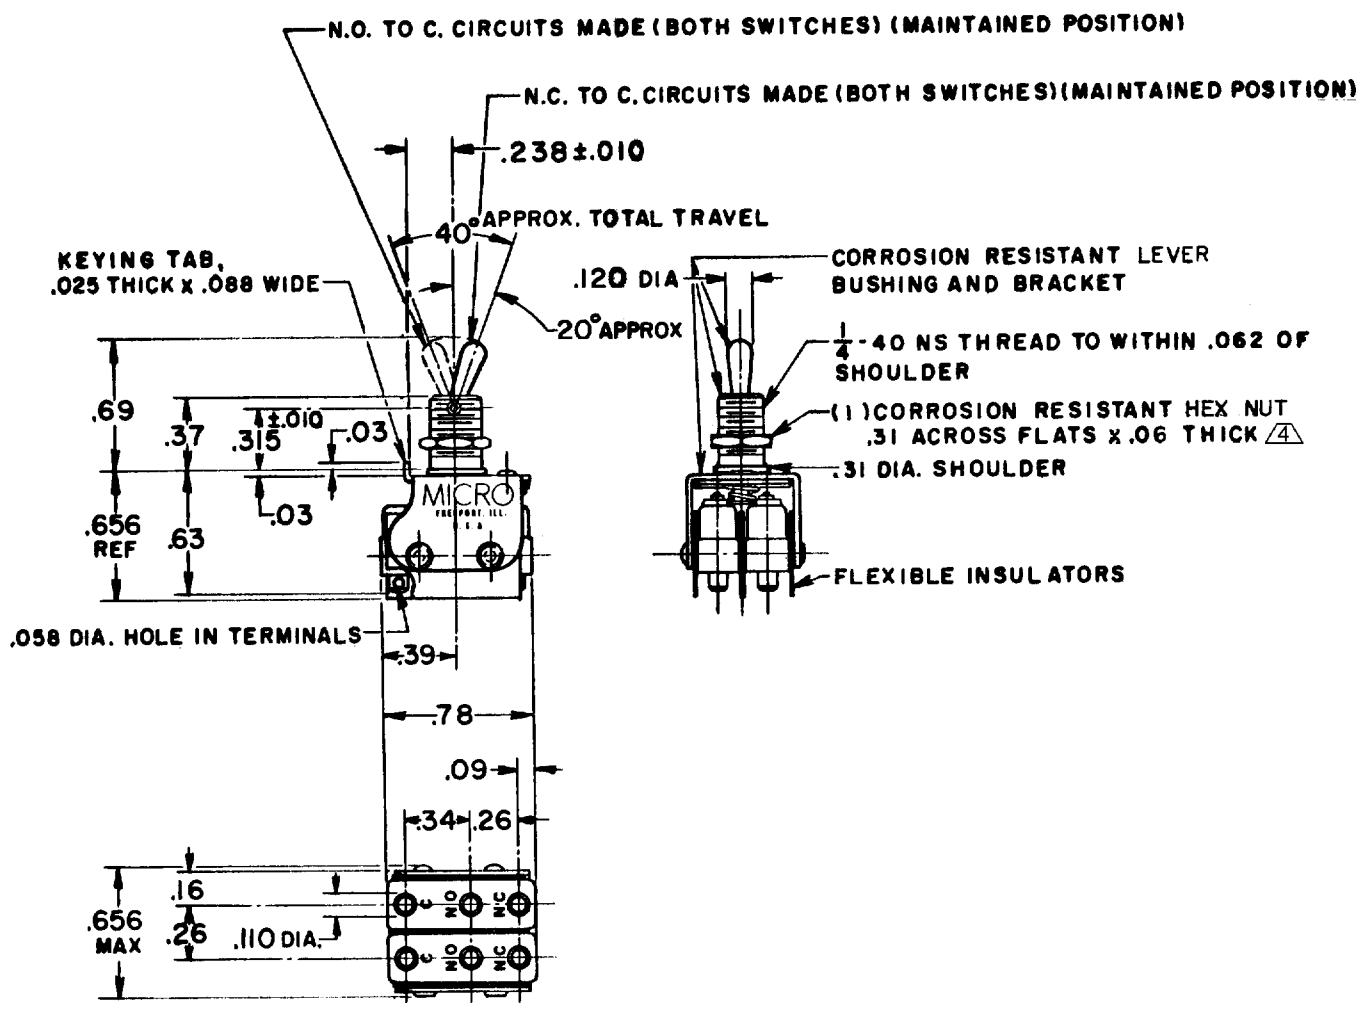

- NOTES**
- 1- UNIT INCLUDES (2) CAT. LIST. IISMI BASIC SWITCHES
  - 2- TERMINALS ARE PLATED FOR SOLDERING.
  - 3- SWITCHES DO NOT OPERATE SIMULTANEOUSLY.
  - 4- HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
		CONTACT ARRANGEMENT (2) S. P. D. T.	BREAK DISTANCE .010 MIN.
	250 VAC ----- 5 AMP 30 VOLTS DC RATING INDUCTIVE ----- SEA LEVEL ----- 3 AMP 50,000 FT. ----- 2.5 AMP RESISTIVE ----- SEA LEVEL ----- 5 AMP 50,000 FT. ----- 5 AMP MAXIMUM INRUSH ----- 24 AMP		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES <b>TOLERANCES ARE:</b> ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
			WEIGHT-- .03 LB.