

HONEYWELL
PART NUMBER

BZ-2RL131T


CATALOG LISTING

BZ-2RL131T

AJH9600

REPLACES: X201840-BZ

REV	DOCUMENT	CHANGED BY		CHECK
A	0050465	MBN	31MAR09	CMH

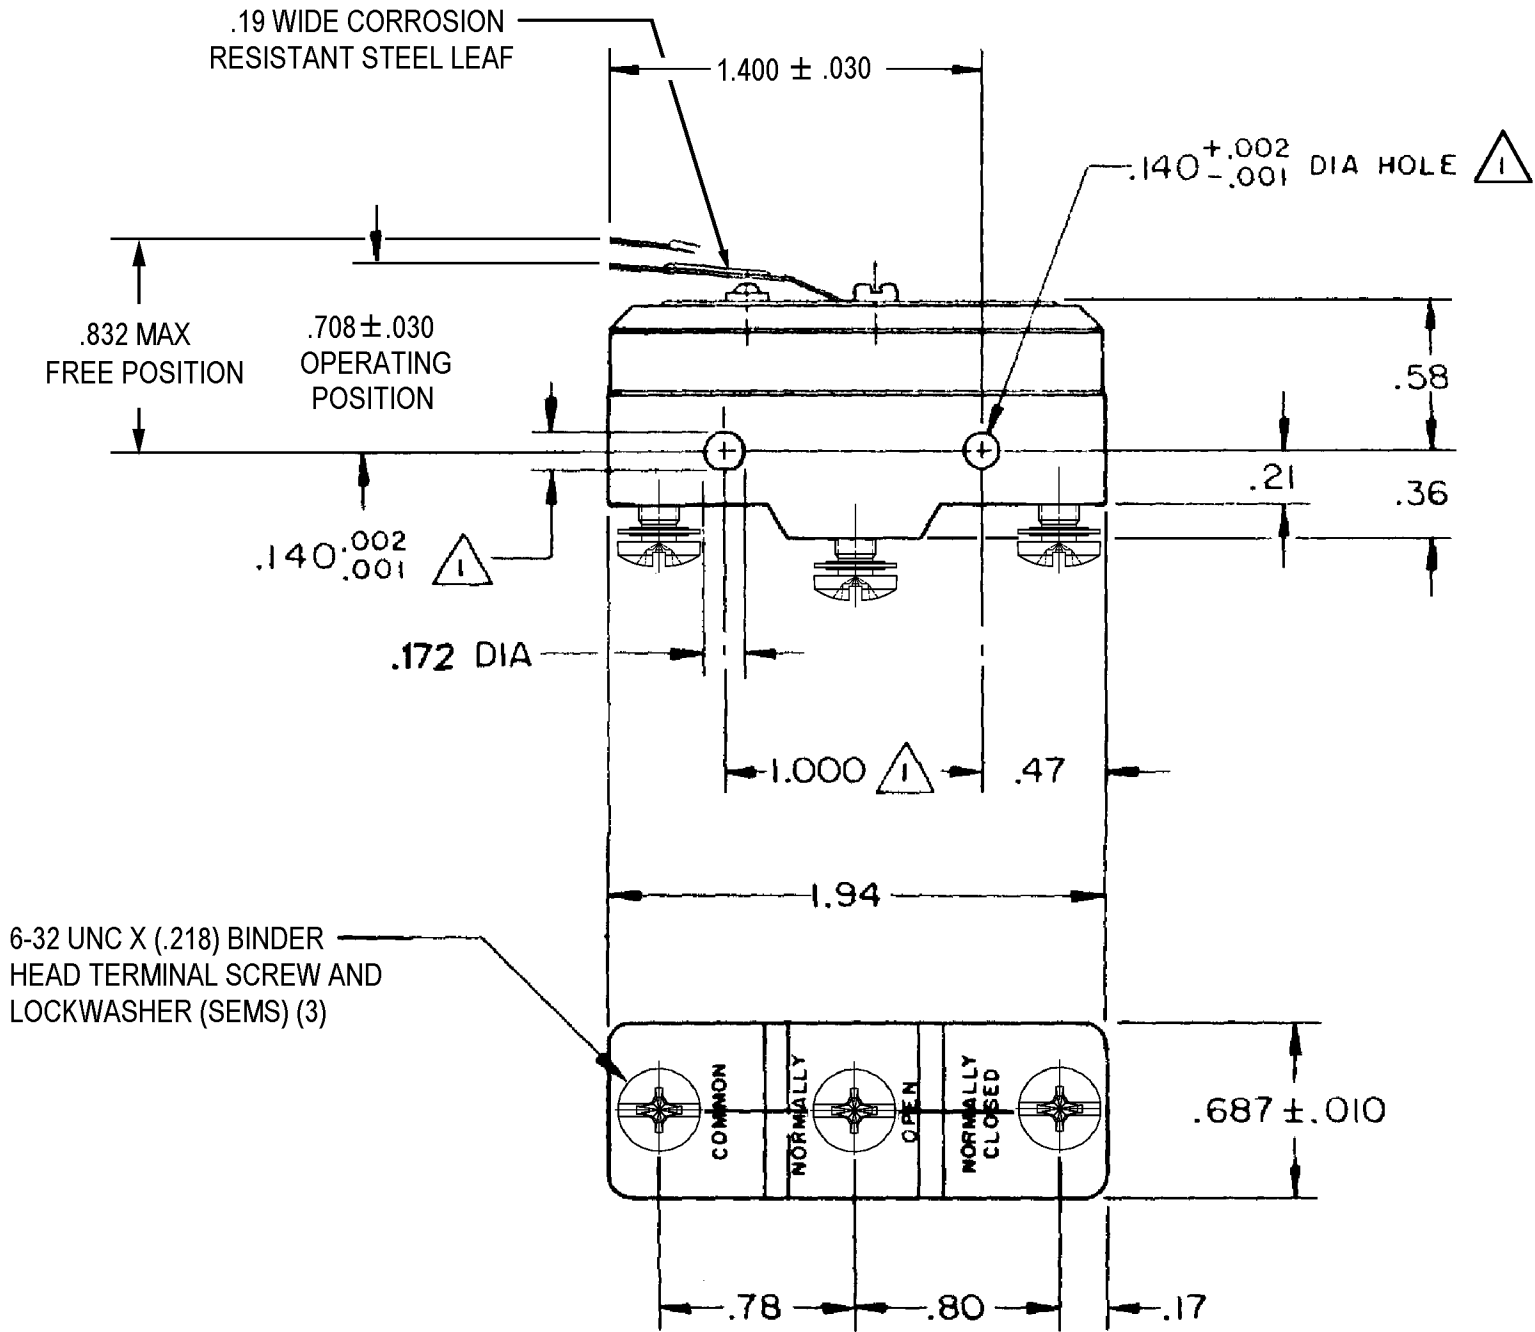

NOTES

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

2 - WEIGHT: .063 LB

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	MBN	25 MAR 09	Honeywell								
OPERATING FORCE - - - - - 10 OZ MAX		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:		CHECK	DB	25 MAR 09									
		S P D T															
RELEASE FORCE - - - - - 1/4 OZ MIN		-L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC, 1/4 HP-250 VAC		NO PLACES X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC								
				ONE PLACE .X ± .030													
DIFFERENTIAL TRAVEL - - - - - .020 MAX		-L288- -L306- -L315-		TWO PLACE .XX ± .015													
				THREE PLACE .XXX ± .005													
OVER TRAVEL - - - - - .060		CE  16A 250V ~ T85 5E4		ANGLES X ± -		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE	DRAWING NAME		REV			
				THIRD ANGLE PROJECTION 					B	I	-	BZ-2RL131T		A			
						RASTER			SCALE	NONE				SHEET	1	OF	1