

CATALOG LISTING
LSQYUB3KC319
SHEET: 1 OF 1


ISSUE
1

REVISIONS



FORMTEK
DRAWN

RELEASE NO. PR-24408
REPLACES


CHECK
29 FEB 00
SAV
CHECK
29 FEB 00
GRT

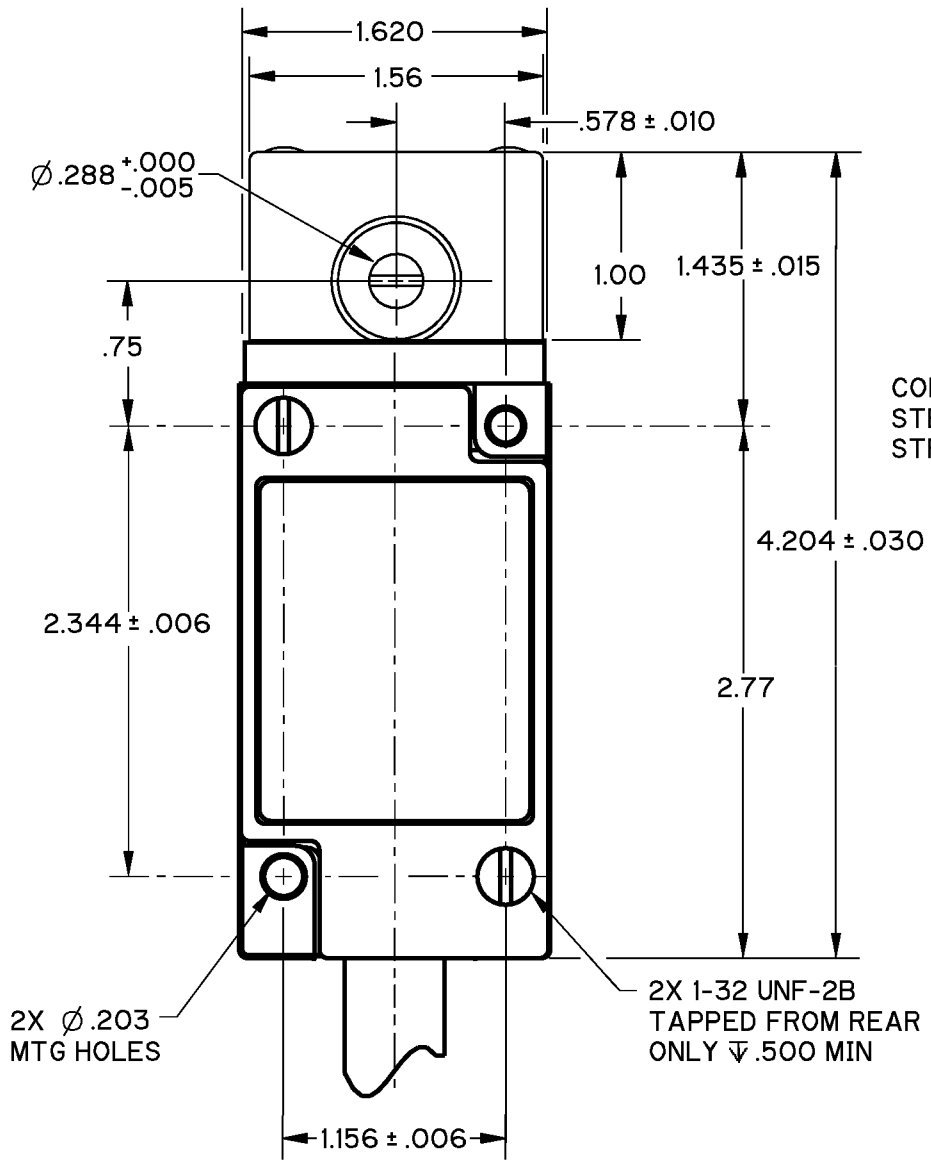

CORROSION RESISTANT
STEEL SHAFT WITH
STRAIGHT KNURL

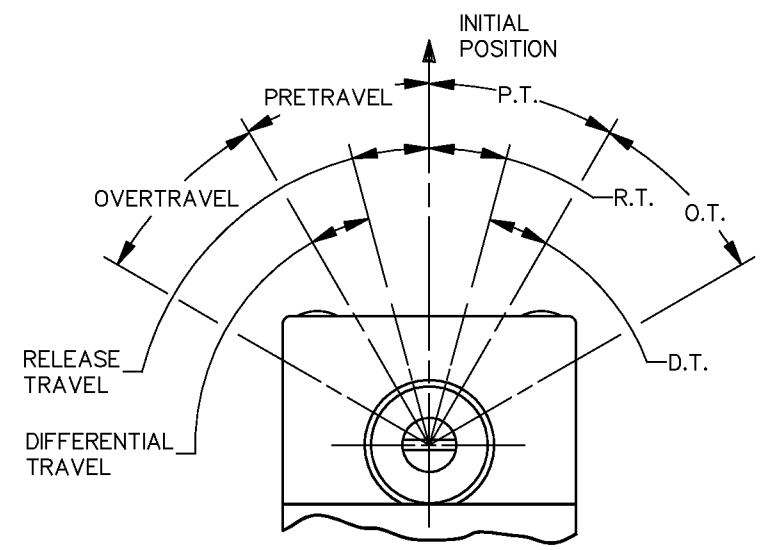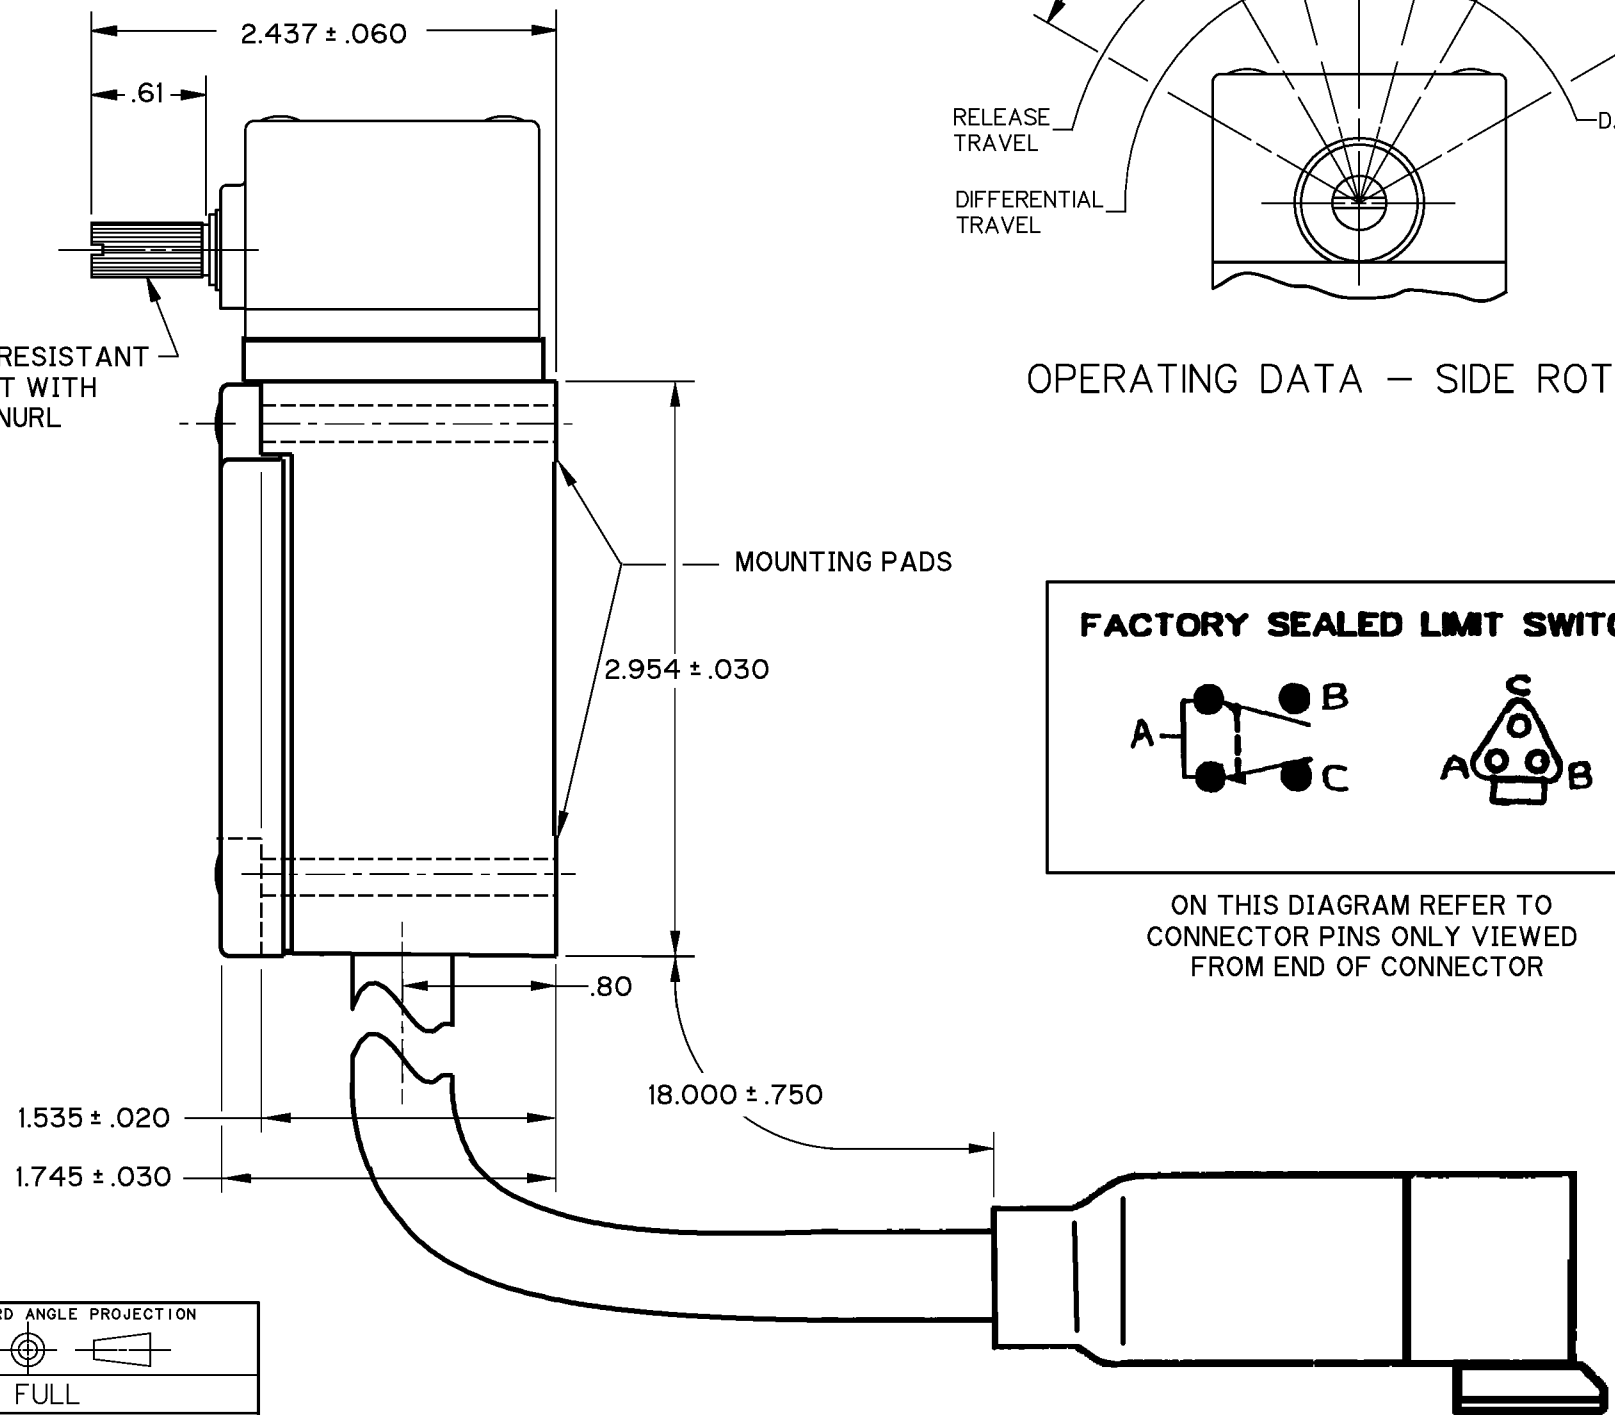

OPERATING DATA – SIDE ROTARY

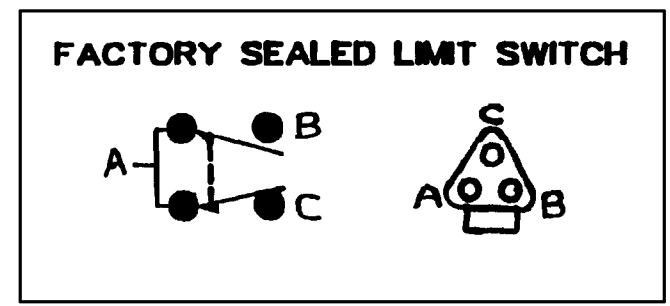

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING TORQUE----- 4 IN LBS MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
FULL TRAVEL TORQUE ----- 4 IN LBS MAX		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
TOTAL TRAVEL----- 75° REF		ONE PLACE (.0) ±.030
PRETRAVEL ----- 5° MAX		TWO PLACE (.00) ±.015
DIFFERENTIAL TRAVEL----- 5° MAX		THREE PLACE (.000) ±.005
OVERTRAVEL ----- 70° MIN		ANGLES ±
		WEIGHT

- NOTES
- 1 - SWITCH USES FLUOROSILICONE SEALS IN OPERATING HEADS ONLY
 - 2 - SWITCH CAVITY EPOXY FILLED

ANSI Y14.5M-1982 APPLIES