MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3-1101-D8
CK-M0150

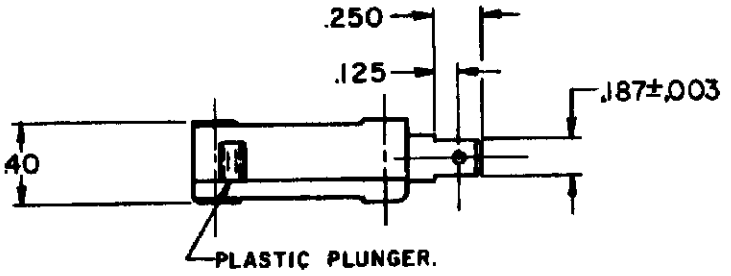

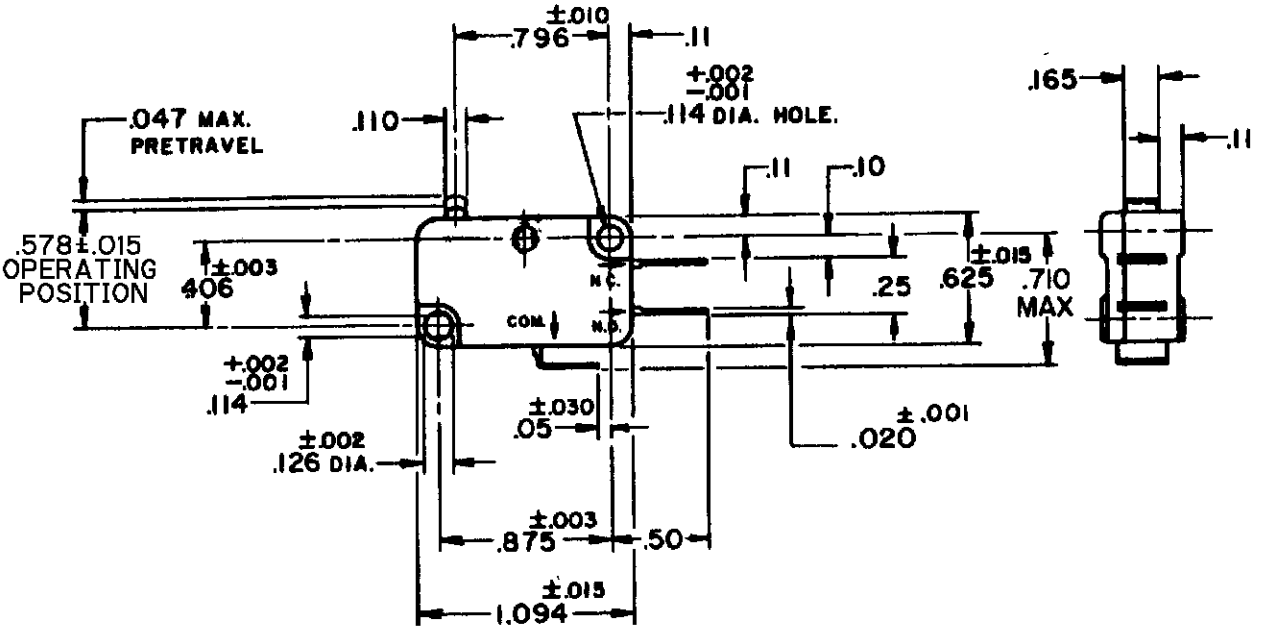

SWITCH MARKINGS PER DIAGRAM BELOW. "XXXX" 4 DIGIT DATE CODE.
INK: WHITE

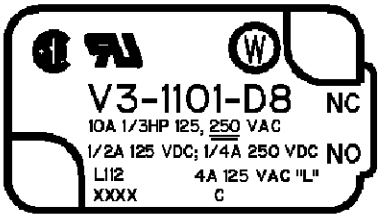

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE - - - - 75 GRAMS MAX	CONTACT ARRANGEMENT SPDT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE - - - - - 10 GRAMS MIN	L112	ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL - - - - .002-.010	10A 1/3HP 125 OR 250 VAC	TWO PLACE (.00) ±.015
OVERTRAVEL - - - - - - - - - .050 MIN	1/2A 125 VDC, 1/4A 250 VDC	THREE PLACE (.000) ±.005
FREE POSITION - - - - - - - .625 MAX	4A 125 VAC "L"	ANGLES ±
RELEASE TRAVEL - - - - - - - .010 MIN		WEIGHT

REVISIONS

A	C095236	TSM 16 JUN 99
B	CO-95347	CSL 23 JUL 99

CATALOG LISTING V3-1101-D8 PAGE 1 OF 1
ISSUE 17 — RELEASE NO. SR-10955 — REPLACES

DRAWN	CHECK	CHECK	CHECK	CHECK
TSM 16 JUN 99	JAF 16 JUN 99			

FORMTEK