



NO4FDW-R

Chassis connector, black chromium plating, waterproof acc. to IP65, front panel mount.

The chassis connector acts as a "feed-through" allowing simplified installations by connecting four conventional LCs on the rear. It is built in the standard D size shell and features an automatic sealing cover for maximum dust and dirt protection and a Push-Pull locking mechanism for safe connection. Colored sealings are included to identify the fiber mode.

Features & Benefits

- Rugged 4-channel Point-to-Point multichannel routing solution
- Laser protected metal shutter seals dust proof with two-component rubber gasket
- Water resistant according to IP65 (mated), rubber sealing gasket
- Accommodates standard LC connectors on the rear for cost effective and simple installations
- Color coding to identify fiber mode:
Multi mode – black
Single mode PC – blue
Single mode APC – green



Available until December 2012


Downloads

- opticalCON Handling Instruction
- opticalCON QUAD Technical Paper
- Product Folder opticalCON
- Product Guide 2012, 05 Data Connectors
- Drawing NO4FDW
- Drawing NO4FDW
- 3D File NO4FDW
- 3D File NO4FDW without sealing frame

Image gallery



USE PROPERLY ALIGNED LC CONNECTORS ONLY

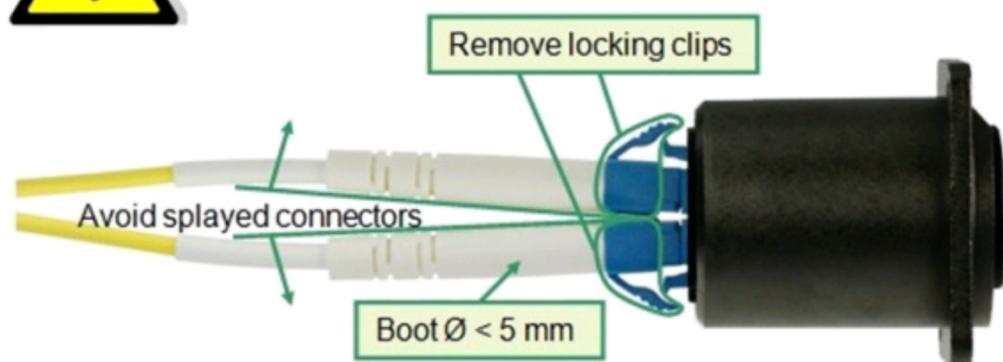

Avoid splayed connectors by using LCs without anti-snap collars and a boot diameter < 5 mm (available from suppliers as e.g. Corning available).

Technical Information [show](#)

Accessories

CAS-DUMMY	CAS-FOCD	NAOBO	NDO
NZPF 1RU	NZPF 3RU	NZPFD	NZPFD-2
NZPFD-4SC	NZPFD-4SC-S	NZPFD-4ST	opticalCON QUAD loop Connector
SCDR	SC DX	SCNO-FDW-A	