

Double-pole Relays Ideal for Audio Speaker Protection and Power Switching

- Slim DPST-NO relay: 24.5 × 13 × 25 mm (L × W × H).
- Standard models meet UL TV-4 and have a high capacity for switching (1,250 VA).
- Single-crossbar contact models available for high reliability.
- Double-insulation construction ensures high insulation performance. (Clearance and creepage of 6.0 mm min. and 10-kV impulse withstand voltage between coil and contacts.)
- Conforms to UL508, CSA 22.2, EN60065 (SEMKO approval), and EN60255 (TÜV approval).



Ordering Information

Classification	Contact form	Enclosure ratings	Model
Standard	DPST-NO	Flux protection	G5PA-2
Single-crossbar contact			G5PA-28

Note: When ordering, add the rated coil voltage to the model number.
Example: G5PA-2 12 VDC

Rated coil voltage

Model Number Legend

G5PA- VDC
1 2 3

1. Number of Poles

2: 2 poles (DPST-NO)

2. Classification

None: Standard

8: Single-crossbar contact

3. Rated Coil Voltage

12, 24 VDC

Specifications

■ Coil Ratings

Rated voltage	12 VDC	24 VDC
Rated current	44.2 mA	22.1 mA
Coil resistance	272 Ω	1,087 Ω
Must operate voltage	70% of rated voltage max.	
Must release voltage	10% of rated voltage min.	
Max. permissible voltage	130% of rated voltage at (23°C)	
Power consumption	Approx. 530 mW	

Note: Max. permissible voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

■ Contact Ratings

Item	G5PA-2	G5PA-28
Rated load	5 A at 250 VAC; 5 A at 24 VDC, resistive load ($\cos\phi = 1$)	5 A at 50 VAC; 3 A at 24 VDC, resistive load ($\cos\phi = 1$)
Rated carry current	5 A	
Max. switching voltage	250 VAC, 24 VDC	50 VAC, 24 VDC
Max. switching current	5 A	
Max. switching power	1,250 VA, 120 W	250 VA, 72 W

■ Characteristics

Item	G5PA-2	G5PA-28
Contact resistance	100 mΩ max.	50 mΩ max.
Operate time	15 ms max.	
Release time	5 ms max.	
Insulation resistance	1,000 MΩ min. (at 500 VDC)	
Dielectric strength	4,000 VAC 50/60 Hz for 1 min between coil and contacts 1,000 VAC 50/60 Hz for 1 min between contacts of same polarity 2,000 VAC 50/60 Hz for 1 min between contacts of different polarity	
Impulse withstand voltage	10,000 V (1.2 x 50 μs) between coil and contacts	
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)	
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 100 m/s ²	
Endurance	Mechanical: 500,000 operations min.	
	Electrical: 100,000 operations min.	50,000 operations min.
Ambient temperature	Operating: -25°C to 70°C (with no icing)	
Ambient humidity	Operating: 5% to 85%	
Weight	Approx. 15 g	

■ Approved Standards

UL508 (File No. 41515)/CSA 22.2 No. 14 (File No. LR31928)

Model	Coil ratings	Contact ratings
G5PA-2	5, 6, 12, 24 VDC	5 A, 250 VAC (resistive load) 5 A, 120 VAC (resistive load) 5 A, 24 VDC (resistive load) TV-4
G5PA-28		5 A, 50 VAC (resistive load) 3 A, 24 VDC (resistive load) 500 W, 120 VAC Tungsten

SEMKO (File No. 9737033/9851138)

Model	Coil ratings	Contact ratings
G5PA-2	5 to 24 VDC	5 A/40 A, 250 VAC
G5PA-28		5 A, 50 VAC

TÜV EN60255 (File No. R9750961)

Model	Coil ratings	Contact ratings
G5PA-2	5, 6, 12, 24 VDC	5 A, 120 VAC ($\cos\phi = 1$) 5 A, 24 VDC (L/R = 0 ms)
G5PA-28		5 A, 50 VAC ($\cos\phi = 1$) 3 A, 24 VDC (L/R = 0 ms)


Reference Data

Simulative load of power supply	
G5PA-2	Electrical endurance: 25,000 operations Rated load: 3 A at 50 VAC Inrush current: 40 A (O-P) with 4,700- μ s capacitor Operating frequency: 1,800 operations/hour
Breaking ability for DC voltage	
G5PA-28	Combination of voltage and resistance to break 20 operations <ul style="list-style-type: none"> • 4 Ω at 45 VDC • 6 Ω or 8 Ω at 50 VDC • 8 Ω at 55 VDC

Dimensions

Note: All units are in millimeters unless otherwise indicated.


G5PA-2

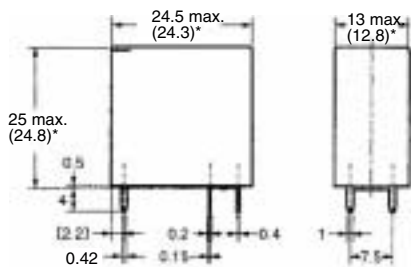

* Average value

Mounting Holes (Bottom View)


Tolerances: ± 0.1 mm.



Terminal Arrangement/ Internal Connections (Bottom View)




G5PA-28

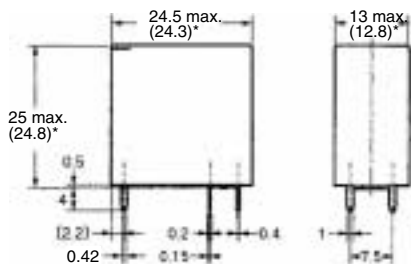

* Average value

Mounting Holes (Bottom View)

Tolerances: ± 0.1 mm.



Terminal Arrangement/ Internal Connections (Bottom View)



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.