

## Soft-start Function Starts Motors Smoothly and Economically

- The soft-start function allows a smooth startup of motors by holding down the starting current, and functions like an inverter.
- Comply with UL, CSA, IEC, and JEM requirements.
- Mount with screws or to DIN tracks.
- Compact monoblock construction (W: 80 × H: 100 × D: 100 mm) with a heat sink.
- Snubber circuit and varistor are built-in.
- Operation indicator.



Refer to *Safety Precautions for All Solid State Relays*.

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

## Model Number Structure

### Model Number Legend

G3J-□□□□□□  
1 2 3 4 5 6 7

#### 1. Basic Model Name

G3J: Solid State Contactor

#### 2. Load Power Supply

Blank: AC output

#### 3. Functions

S: Soft-start function

#### 4. Rated Load Power Supply Voltage

2: 200 VAC

4: 400 VAC

#### 5. Rated Load Current

11: 11.1 A (200-V models)

05: 4.8 A (200-V models), 5.5 A (400-V models)

03: 2.4 A (400-V) models


#### 6. Terminal Type

B: Screw terminals

#### 7. Zero Cross Function

L: Not equipped with zero cross function

## Appearance

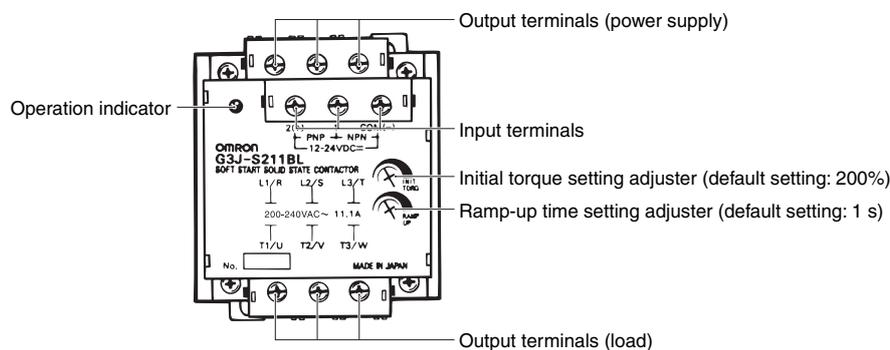

# Ordering Information

## List of Models

Number of elements	Insulation method	Rated supply voltage	Input method	Applicable motor		Model
3	Phototriac	12 to 24 VDC	No-voltage input (open and short-circuit input)	2.2 kW (5.5 A)	380 to 400 VAC	G3J-S405BL
				0.75 kW (2.4 A)		G3J-S403BL
				2.2 kW (11.1 A)	200 to 220 VAC	G3J-S211BL
				0.75 kW (4.8 A)		G3J-S205BL

**Note:** When ordering, specify the rated supply voltage.

## Specifications

### Ratings (at an Ambient Temperature of 25°C)

#### Power Supply

Rated supply voltage	12 to 24 VDC
Operating voltage range	10.2 to 26.4 VDC
Current consumption	100 mA max. (at 12 to 24 VDC)

#### Operation Circuit

Input current	10 mA max. (at 12 to 24 VDC)
Input method No-voltage input (short-circuiting and opening inputs) (See note.)	Short-circuiting or opening terminals 1 and COM or 2 (+) and 1 SSR input turned ON: A maximum residual voltage of 2 V between short-circuited terminals SSR input turned OFF: A maximum leakage current of 0.15 mA Relay input: For minute signals

**Note:** Refer to *Safety Precautions for the G3J-T, G3J-S, and G3J*.

#### Main Circuit

Item		G3J-S405BL	G3J-S403BL	G3J-S211BL	G3J-S205BL
Rated load voltage		200 to 400 VAC (50/60 Hz)		200 to 240 VAC (50/60 Hz)	
Load voltage range		180 to 440 VAC (50/60 Hz)		180 to 264 VAC (50/60 Hz)	
Rated carry current		5.5 A (Ta = 40°C)	2.4 A (Ta = 40°C)	11.1 A (Ta = 40°C)	4.8 A (Ta = 40°C)
Min. load current		0.5 A			
Peak-value current resistivity		220 A, 60 Hz, 1 cycle	96 A, 60 Hz, 1 cycle	350 A, 60 Hz, 1 cycle	150 A, 60 Hz, 1 cycle
Overload resistance		Refer to <i>Information Common to the G3J, G3J-T, and G3J-S</i> .			
Closed current (effective value)	AC3	55 A	24 A	111 A	48 A
	AC4	66 A	28.8 A	133.2 A	57.6 A
Breaking current (effective value)	AC3	44 A	19.2 A	88.8 A	38.4 A
	AC4	55 A	24 A	111 A	48 A
Applicable load	3-phase inductive motor (AC3 AC4 AC53-a)	380 to 400 VAC, 2.2 kW, 5.5 A	380 to 400 VAC, 0.75 kW, 2.4 A	200 to 220 VAC, 2.2 kW, 11.1 A	200 to 220 VAC, 0.75 kW, 4.8 A
	Resistive load (AC1) (See note.)	200 to 400 VAC, 5.5 A	200 to 400 VAC, 2.4 A	200 to 240 VAC, 11.1 A	200 to 240 VAC, 4.8 A

**Note:** No single-phase load can be connected.

## ■ Characteristics

Item	G3J-S405BL	G3J-S403BL	G3J-S211BL	G3J-S205BL
<b>Ramp-up time</b>	Set within a range from 1 to 25 s.			
<b>Reset time</b>	5/6 cycles of load power supply + 1 ms max.			
<b>Starting torque</b>	Set within a range from 200% to 450% I <sub>n</sub> .			
<b>Output ON-voltage drop</b>	1.8 V <sub>RMS</sub> max.		1.6 V <sub>RMS</sub> max.	
<b>Leakage current</b>	20 mA max. (at 400 VAC)		10 mA max. (at 200 VAC)	
<b>Insulation resistance</b>	100 MΩ min. (at 500 VDC)			
<b>Dielectric strength</b>	2,500 VAC, 50/60 Hz for 1 min			
<b>Vibration resistance</b>	Destruction: 10 to 55 to 10 Hz, 0.75–mm single amplitude			
<b>Shock resistance</b>	Destruction: 294 m/s <sup>2</sup>			
<b>Ambient temperature</b>	Operating: –20°C to 60°C (with no icing or condensation) Storage: –30°C to 70°C (with no icing or condensation)			
<b>Ambient humidity</b>	Operating: 45% to 85%			
<b>Weight</b>	730 g max.			
<b>Certified standards</b>	UL508 File No. E64562 CSA 22.2 No. 14 File No. LR35535 IEC947-4-1 File No. 96.2597.02			
<b>EMC</b>	Emission	AC mains	IEC947-4-2, CISPR 11 Class A	
	Emission	Electromagnetic	IEC947-4-2, CISPR 11 Class A	
	Immunity	ESD	IEC947-4-2, IEC801-2: 4 kV contact discharge 8 kV air discharge	
	Immunity	Electromagnetic	IEC947-4-2, IEC1000-4-3 10 V/m (80 MHz to 1 GHz)	
	Immunity	EFT	IEC947-4-2, IEC801-4: 2 kV AC power-signal line	
	Immunity	Surge transient	IEC947-4-2, IEC1000-4-5 1 kV differential mode 2 kV common mode	
	Immunity	RF disturbance	IEC947-4-2, IEC/DIS1000-4-6 10 V (0.15 to 80 MHz)	

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

## Soft-start/stop Function Starts and Stops Three-phase Motors Smoothly and Economically

- Function like an inverter by holding down the starting current.
- Comply with UL, CSA, IEC (400-V models only), and JEM requirements.
- Mount with screws or to DIN tracks.
- Compact monoblock construction for the G3J-T217BL (W: 100 × H: 100 × D: 110 mm) with a heat sink.
- Snubber circuit and varistor are built-in.
- Operation indicator.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Refer to *Safety Precautions for All Solid State Relays*.

## Model Number Structure

### Model Number Legend

G3J-□□□□□□□  
1 2 3 4 5 6 7

#### 1. Basic Model Name

G3J: Solid State Contactor

#### 2. Load Power Supply

Blank: AC output

#### 3. Functions

T: Soft-start/stop function

#### 4. Rated Load Power Supply Voltage

2: 200 VAC

4: 400 VAC

#### 5. Rated Load Current

17: 17.4 A (200-V models)

11: 11.1 A (200-V models)

05: 4.8 A (200-V models), 5.5 A (400-V models)

03: 2.4 A (400-V) models


#### 6. Terminal Type

B: Screw terminals

#### 7. Zero Cross Function

L: Not equipped with zero cross function

## Appearance

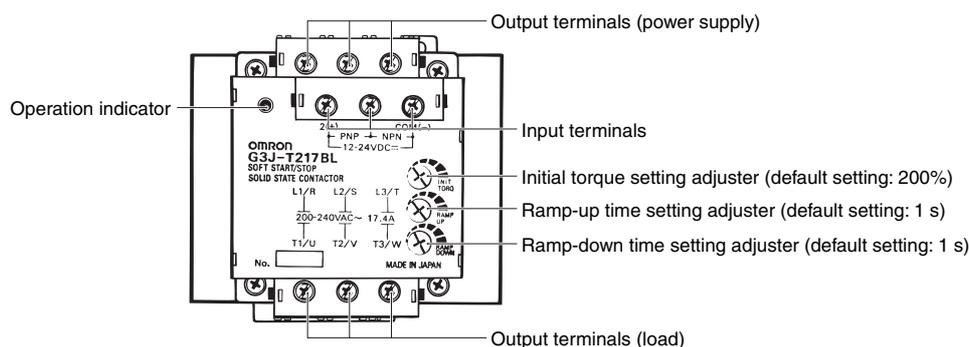

# Ordering Information

## List of Models

Number of elements	Insulation method	Rated supply voltage	Input method	Applicable motor		Model
3	Phototriac	12 to 24 VDC	No-voltage input (open and short-circuit input)	2.2 kW (5.5 A)	380 to 400 VAC	G3J-T405BL
				0.75 kW (2.4 A)		G3J-T403BL
				3.7 kW (17.4 A)	200 to 220 VAC	G3J-T217BL
				2.2 kW (11.1 A)		G3J-T211BL
				0.75 kW (4.8 A)		G3J-T205BL

Note: When ordering, specify the rated supply voltage.

## Specifications

### Ratings (at an Ambient Temperature of 25°C)

#### Power Supply

Rated supply voltage	12 to 24 VDC
Operating voltage range	10.2 to 26.4 VDC
Current consumption	50 mA max. (at 12 to 24 VDC)

#### Operation Circuit

Input current	10 mA max. (at 12 to 24 VDC)
Input method No-voltage input (short-circuiting and opening inputs) (See note.)	Short-circuiting or opening terminals 1 and COM or 2 (+) and 1 SSR input turned ON:A maximum residual voltage of 2 V between short-circuited terminals SSR input turned OFF:A maximum leakage current of 0.15 mA Relay input: For minute signals

Note: Refer to *Safety Precautions for the G3J-T, G3J-S, and G3J*.

#### Main Circuit

Item		G3J-T405BL	G3J-T403BL	G3J-T217BL	G3J-T211BL	G3J-T205BL
Rated load voltage		200 to 400 VAC (50/60 Hz)		200 to 240 VAC (50/60 Hz)		
Load voltage range		180 to 440 VAC (50/60 Hz)		180 to 264 VAC (50/60 Hz)		
Rated carry current (See note 1.)		5.5 A (Ta = 40°C)	2.4 A (Ta = 40°C)	17.4 A (Ta = 40°C)	11.1 A (Ta = 40°C)	4.8 A (Ta = 40°C)
Min. load current		0.5 A				
Peak-value current resistivity		220 A, 60 Hz, 1 cycle	96 A, 60 Hz, 1 cycle	500 A, 60 Hz, 1 cycle	350 A, 60 Hz, 1 cycle	150 A, 60 Hz, 1 cycle
Overload resistance		Refer to <i>Information Common to the G3J, G3J-T, and G3J-S</i> .				
Closed current (effective value)	AC3	55 A	24 A	174 A	111 A	48 A
	AC4	66 A	28.8 A	208.8 A	133.2 A	57.6 A
Breaking current (effective value)	AC3	44 A	19.2 A	139.2 A	88.8 A	38.4 A
	AC4	55 A	24 A	174 A	111 A	48 A
Applicable load	3-phase inductive motor (AC3 AC4 AC53-a)	380 to 400 VAC, 2.2 kW, 5.5 A	380 to 400 VAC, 0.75 kW, 2.4 A	200 to 220 VAC, 3.7 kW, 17.4 A	200 to 220 VAC, 2.2 kW, 11.1 A	200 to 220 VAC, 0.75 kW, 4.8 A
		Motors passing the AC3-class, AC4-class, and AC53-a-class switching frequency test (Ta = 40°C) under conditions specified by OMRON. Refer to <i>Information Common to the G3J, G3J-T, and G3J-S</i> .				
	Resistive load (AC1) (See note 2.)	200 to 400 VAC, 5.5 A	200 to 400 VAC, 2.4 A	200 to 240 VAC, 17.4 A	200 to 240 VAC, 11.1 A	200 to 240 VAC, 4.8 A

Note: 1. The rated carry current varies depending on the ambient temperature. Refer to *Load Current vs. Ambient Temperature* under *Engineering Data* in the *Information Common to the G3J-T, G3J-S, and G3J* for details.

2. No single-phase load can be connected.

## ■ Characteristics

Item	G3J-T405BL	G3J-T403BL	G3J-T217BL	G3J-T211BL	G3J-T205BL
<b>Ramp-up time</b>	Set within a range from 1 to 25 s.				
<b>Ramp-down time</b>	Set within a range from 1 to 25 s.				
<b>Starting torque</b>	Set within a range from 200% to 450% In.				
<b>Output ON-voltage drop</b>	1.8 V <sub>RMS</sub> max.		1.6 V <sub>RMS</sub> max.		
<b>Leakage current</b>	20 mA max. (at 400 VAC)		10 mA max. (at 200 VAC)		
<b>Insulation resistance</b>	100 MΩ min. (at 500 VDC)				
<b>Dielectric strength</b>	2,500 VAC, 50/60 Hz for 1 min				
<b>Vibration resistance</b>	Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude				
<b>Shock resistance</b>	Destruction: 294 m/s <sup>2</sup>				
<b>Ambient temperature</b>	Operating: -20°C to 60°C (with no icing or condensation) Storage: -30°C to 70°C (with no icing or condensation)				
<b>Ambient humidity</b>	Operating: 45% to 85%				
<b>Weight</b>	730 g max.		800 g max.	730 g max.	
<b>Standards</b>	UL508 File No. E64562 CSA22.2 No. 14 File No. LR35535				

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.