

Bus system cable - SAC-5P- 5,0-924/FR SCO - 1405982


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, CANopen[®], DeviceNet[™], 5-position, PVC, gray, shielded, free cable end, on Socket angled M12 SPEEDCON, A-coded, cable length: 5 m



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 STK |
| GTIN |  4 046356 800464 |
| GTIN | 4046356800464 |
| Weight per Piece (excluding packing) | 1.000 g |
| Custom tariff number | 85444290 |
| Country of origin | United States |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |

General

| | |
|-----------------------|---------|
| Rated current at 40°C | 4 A |
| Rated voltage | 48 V AC |
| | 60 V DC |

Bus system cable - SAC-5P- 5,0-924/FR SCO - 1405982

Technical data

General

| | |
|-----------------------|------------------------|
| Number of positions | 5 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Signal type/category | CANopen® |
| | DeviceNet™ |
| Status display | No |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

Cable

| | |
|-------------------------------------|---|
| Cable type | CAN Bus/DeviceNet gray |
| Cable type (abbreviation) | 924 |
| UL AWM style | 2464 (80°C/300 V) |
| Cable structure | 2xAWG22 (Signal) + 2xAWG22 (Power) |
| Conductor cross section | 2x 0.34 mm ² (Signal line) |
| | 2x 0.34 mm ² (Power supply) |
| AWG signal line | 22 |
| AWG power supply | 22 |
| Conductor structure signal line | 19x 0.15 mm |
| Conductor structure, voltage supply | 19x 0.15 mm |
| Core diameter including insulation | 1.27 mm ±0.05 mm (Signal line) |
| | 2.24 mm ±0.13 mm (Power supply) |
| Wire colors | Red-black, blue-white |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Plastic-coated aluminum foil, aluminum side inside |
| Overall twist | 2 pairs around a drain wire in the center to the core |

Bus system cable - SAC-5P- 5,0-924/FR SCO - 1405982

Technical data

Cable


| | |
|---|---|
| Shielding | Plastic-coated aluminum foil with a filler litz wire, aluminum side outside |
| External sheath, color | gray |
| External cable diameter D | 6.9 mm ±0.13 mm |
| Minimum bending radius, flexible installation | 15 x D |
| Cable weight | 64.51 kg/km |
| Outer sheath, material | PVC |
| Material conductor insulation | Foamed PE (Signal line) |
| | PVC (Power supply) |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 59.38 Ω*m (Signal line) |
| | ≥ 57.41 GΩ*km (Power supply) |
| Working capacitance | nom. 78.74 pF (per meter) |
| Wave impedance | 120 Ω ±12 Ω |
| Signal runtime | 4.46 ns/m |
| Shield attenuation | 0.95 dB (f = 125 kHz) |
| | 1.64 dB (f = 500 kHz) |
| | 2.3 dB (f = 1 MHz) |
| Special properties | UL standards PLTC and ITC |
| Resistance to oil | Yes |
| Other resistance | UV resistant |
| Ambient temperature (operation) | -30 °C ... 75 °C (cable, fixed installation) |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


Drawings

Schematic diagram



Pin assignment M12 socket, 5-pos., A-coded, socket side view


Cable cross section




CAN Bus/DeviceNet gray [924]

Bus system cable - SAC-5P- 5,0-924/FR SCO - 1405982

Circuit diagram

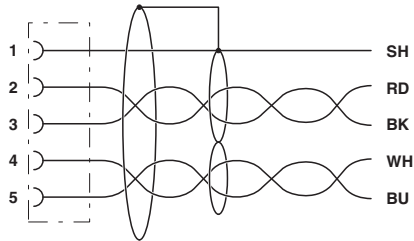

Dimensional drawing



Contact assignment of the M12 socket

M12 x 1 socket, angled, shielded

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060307 |
| eCl@ss 4.1 | 27060307 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060308 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC002599 |
| ETIM 6.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 26121616 |
| UNSPSC 7.0901 | 26121616 |
| UNSPSC 11 | 26121604 |
| UNSPSC 12.01 | 26121616 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Bus system cable - SAC-5P- 5,0-924/FR SCO - 1405982


Approvals


Approvals


UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

| | | | |
|--------------------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 221474 |
| | | | |
| Nominal current IN | | 4 A | |
| Nominal voltage UN | | 125 V | |

| | | | |
|--------------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 221474 |
| | | | |
| Nominal current IN | | 4 A | |
| Nominal voltage UN | | 125 V | |

| | | | |
|--------------|---|--|--|
| cULus Listed |  | | |
|--------------|---|--|--|