

Housing - HC-STA-B06-BWS-ELC-AL - 1411318

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




HEAVYCON B6 panel mounting base, with single locking latch, with flat gasket, salt-water-resistant aluminum, conductive profile gasket

Why buy this product

- good shielding in the event of electromagnetic interference



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 927192
GTIN	4046356927192
Weight per Piece (excluding packing)	60.000 g
Custom tariff number	85389099
Country of origin	China

Technical data

Dimensions

Height	30.5 mm
Width	53 mm
Length	80.5 mm
Length of the assembly cutout	52 mm
Width of the assembly cutout	35 mm

Ambient conditions

Degree of protection of housing (IP)	IP66
--------------------------------------	------

Housing - HC-STA-B06-BWS-ELC-AL - 1411318

Technical data

Ambient conditions

	IP67
Degree of protection of housing (NEMA)	4X (UL 50)
Ambient temperature (operation)	-40 °C ... 125 °C

General


Note	For contact inserts HC-B6, BB10, DD24, M
Size	B6
Housing type	Panel mounting base
Color	silver
Locking type	With single locking latch
Torque	1.5 Nm ... 2 Nm (Mounting screw)
Screw connection	none
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material lock	Polyamide

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Dimensional drawing

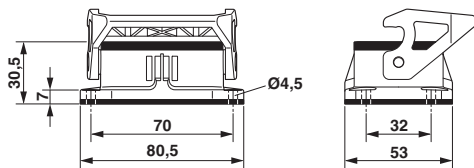

Dimensional drawing

Dimensional drawing



Panel cutout

Approvals

Approvals

Approvals

GL / EAC / UL Recognized / cUL Recognized / cULus Recognized

Housing - HC-STA-B06-BWS-ELC-AL - 1411318


Approvals

Ex Approvals


Approval details

GL <http://www.gl-group.com/newbuilding/approvals/index.html> 6196614

EAC 7500651.22.01.00246

UL Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> E255026

cUL Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> E255026

cULus Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>