

Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, PUR/FRNC halogen-free, green RAL 6018, shielded (Advanced Shielding Technology), Plug straight M8 / IP67, coding: D, on free cable end, cable length: 2 m



Key Commercial Data

| | |
|----------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 560472 |
| GTIN | 4055626560472 |
| Custom tariff number | 85444290 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 90 °C (M12 connector) |

General data

| | |
|-----------------------|--|
| Note | This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) |
| Rated current at 40°C | 4 A |
| Rated voltage | 48 V AC |

Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Technical data

General data

| | |
|---|--------------------------------------|
| | 60 V DC |
| Number of positions | 4 |
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps |
| | EtherCAT® CAT5 (IEC 11801), 100 Mbps |
| Standards/regulations | M8 connector IEC 61076-2-114 |
| Transmission characteristics (category) | CAT5 |
| Transmission speed | 100 Mbps |

Characteristics head 1

| | |
|--|--|
| Head type | Plug straight M8 / IP67 |
| No. of positions (pin connector pattern) | 4 |
| Coding | D (Data) |
| Color | black |
| Material (component) | CuSn (Contact) |
| | Ni/Au (Contact surface) |
| | PA 6.6 (Contact carriers) |
| | TPU, hardly inflammable, self-extinguishing (Grip) |
| | Brass, nickel-plated (Screw connection) |
| Shielded | yes |
| Insulation resistance | ≥ 100 MΩ |
| Insertion/withdrawal cycles | ≥ 100 |
| Torque | 0.2 Nm |
| Ambient temperature (operation) | -25 °C ... 90 °C |

Characteristics head 2

| | |
|---|----------------|
| Head type | free cable end |
| Stripping length of the sheath (free conductor end) | 45 mm ± 10 mm |

Standards and Regulations

| | |
|--------------------------|------------------------------|
| Standards/specifications | M8 connector IEC 61076-2-114 |
|--------------------------|------------------------------|

Cable

| | |
|---------------------------|--|
| Product labeling | "sequential length in metres" PN-CABLE-934-C / PUR-4X22AWG/7 Trailing * 22AWG (SHIELDED) (UL) E119100 CMX 75°C VERIFIED (UL) CAT 5E PATCH CABLE FRNC * (Cable printing cable supplier) |
| Cable type | PROFINET drag chain CAT5 |
| Cable type (abbreviation) | 93C |
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps |
| | EtherCAT® CAT5 (IEC 11801), 100 Mbps |
| Cable structure | 1x4xAWG22/7; SF/TQ |

Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Technical data

Cable

| | |
|---|--|
| Conductor cross section | 4x 0.34 mm ² |
| AWG signal line | 22 |
| Conductor structure signal line | 7x 0.25 mm |
| Core diameter including insulation | 1.5 mm |
| Wire colors | White, yellow, blue, orange |
| Overall twist | Star quad |
| Shielding | Aluminum-coated foil, tinned copper braided shield |
| Optical shield covering | 85 % |
| External sheath, color | green RAL 6018 |
| Outer sheath thickness | approx. 0.9 mm |
| External cable diameter D | 6.5 mm ±0.2 mm |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 7.5 x D |
| Number of bending cycles | 3000000 |
| Bending radius | 100 mm |
| Traversing path | 10 m |
| Traversing rate | 4 m/s |
| Acceleration | 4 m/s ² |
| Torsion force | ± 30 °/m |
| Tensile strength GRP | ≤ 150 N |
| Cable weight | 61 kg/km |
| Outer sheath, material | PUR |
| Material, inner sheath | FRNC |
| Material conductor insulation | PE |
| Conductor material | Tin-plated Cu litz wires |
| Insulation resistance | ≥ 500 MΩ*km |
| Loop resistance | ≤ 120.00 Ω/km |
| Wave impedance | 100 Ω ±15 Ω (at 1 ... 100 MHz) |
| Near end crosstalk attenuation (NEXT) | 80 dB (with 1 MHz) |
| | 76 dB (at 4 MHz) |
| | 70 dB (at 10 MHz) |
| | 65 dB (at 16 MHz) |
| | 63 dB (at 20 MHz) |
| | 60 dB (at 31.25 MHz) |
| | 55 dB (at 62.5 MHz) |
| | 50 dB (at 100 MHz) |
| Attenuation | 2.1 dB (with 1 MHz) |

Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Technical data

Cable

| | |
|---|---|
| | 4 dB (at 4 MHz) |
| | 6.3 dB (at 10 MHz) |
| | 8 dB (at 16 MHz) |
| | 9 dB (at 20 MHz) |
| | 11.4 dB (at 31.25 MHz) |
| | 16.5 dB (at 62.5 MHz) |
| | 21.3 dB (at 100 MHz) |
| Signal speed | 0.66 c |
| Signal runtime | 5.3 ns/m |
| Coupling resistance | ≤ 20.00 mΩ/m (at 10 MHz) |
| Nominal voltage, cable | 600 V (UL rating) |
| Test voltage Core/Core | 2000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 2000 V (50 Hz, 1 min.) |
| Special properties | Electrical properties according to EN 50288-2-2 |
| Flame resistance | according to IEC 60332-1-2 |
| Halogen-free | yes |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Other resistance | UV resistant |
| Ambient temperature (operation) | -40 °C ... 70 °C (cable, fixed installation) |
| | -40 °C ... 70 °C (cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -50 °C ... 70 °C |
| Shielded | yes |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings


Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Schematic diagram




Pin assignment M8 male connector, 4-pos., D-coded, view of pin side

Schematic diagram




Connector pin assignment plug RJ45

Dimensional drawing




Plug M8 x 1, angled, shielded

Circuit diagram

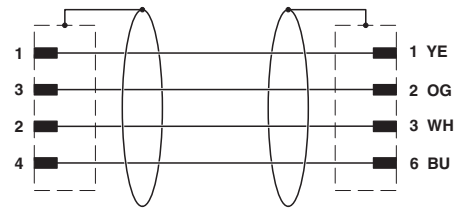

Contact assignment of the M8 and RJ45 plug


Dimensional drawing

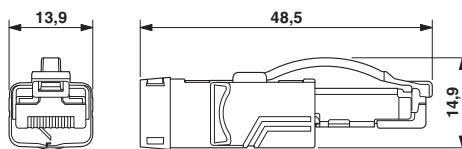

RJ45 connector, IP20

Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Cable cross section

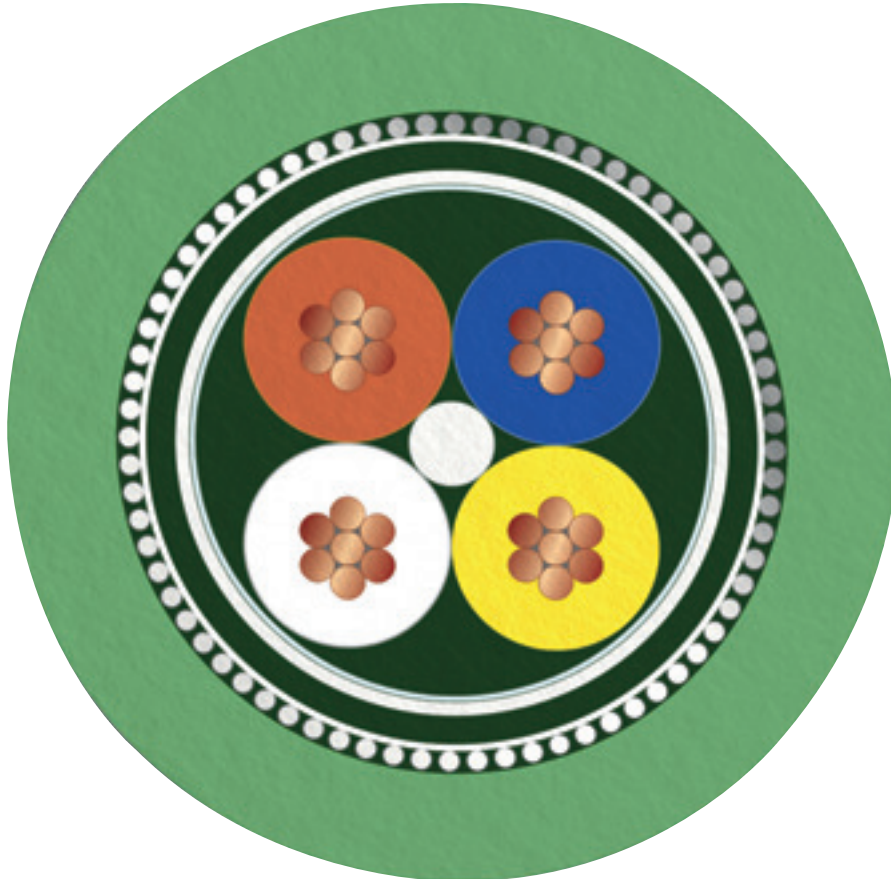

PROFINET drag chain CAT5 [93C]

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27060308 |
| eCl@ss 11.0 | 27060307 |
| eCl@ss 7.0 | 27060308 |
| eCl@ss 9.0 | 27060308 |

ETIM

| | |
|----------|----------|
| ETIM 6.0 | EC001262 |
| ETIM 7.0 | EC001262 |

Network cable - NBC-M8MSD/ 2,0-93C - 1423704

Approvals

Approvals

Approvals

EAC-RoHS / EAC / UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

| | | |
|----------|--|--------------------------|
| EAC-RoHS | | RU D- DE.HB35.B.00385 |
|----------|--|--------------------------|

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.BL08.B.00286 |
|-----|--|--------------------------|

| | | | |
|--------------------|--|---|---------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E335024 |
| Nominal voltage UN | | 30 V | |
| Nominal current IN | | 0.5 A | |

| | | | |
|--------------------|--|---|---------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E335024 |
| Nominal voltage UN | | 30 V | |
| Nominal current IN | | 0.5 A | |

| | |
|--------------|--|
| cULus Listed | |
|--------------|--|