

Female insert - VS-MSTBVA 2,5/ 5-GB-5,08-BK-A - 1609565


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



MSTB contact insert, for PCB assembly, 24 V, 5-pos., with straight solder pins, RAL 9005 (black), for panel mounting frame VS-PPC-F2-MSTB-...-1R-P



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
GTIN	 4 046356 175876
GTIN	4046356175876
Weight per Piece (excluding packing)	2.460 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

General data

Note	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 11 Connectors for 24 Volt Power Supply Cabling and Chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
Number of positions	5
Alternative short product description	Contact insert for PCB mounting
Rated voltage (III/3)	24 V

Standards and Regulations

Female insert - VS-MSTBVA 2,5/ 5-GB-5,08-BK-A - 1609565

Technical data

Standards and Regulations


Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

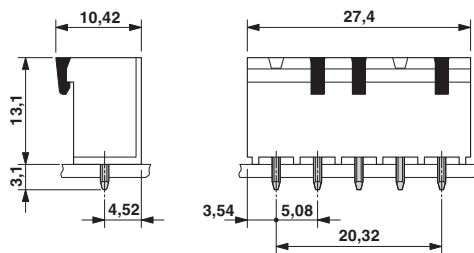

Drilling diagram

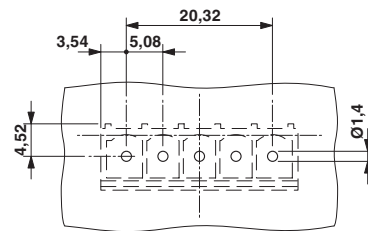

Drilling diagram

MSTB contact insert

Approvals

Approvals

Approvals

EAC / cULus Recognized

Ex Approvals

Approval details

EAC B.01742

cULus Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E118976-20080903	
Nominal current I _N	16 A

Female insert - VS-MSTBVA 2,5/ 5-GB-5,08-BK-A - 1609565

Approvals

Nominal voltage UN	24 V