

## Converter - FB-HSB-DP/PA - 2316370

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PROFIBUS DP to PROFIBUS PA coupler

PROFIBUS DP to PROFIBUS PA coupler

### Product Description

PROFIBUS coupler/link products transparently convert PROFIBUS DP to PROFIBUS PA, while providing detailed network diagnostics and an oscilloscope feature for PROFIBUS PA

### Why buy this product

- ✓ One communication interface module can drive up to ten individual PROFIBUS DP or PROFIBUS PA modules
- ✓ Auto detect any baud rate up to 12 Mbps transparently
- ✓ Powerful, embedded web server for configuration and access to network diagnostics
- ✓ Manage and configure PROFIBUS field devices using FDT/DTM



### Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	900.000 g
Custom tariff number	85176200
Country of origin	Netherlands

### Technical data

#### Dimensions

Width	75 mm
Height	100 mm
Depth	132 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
---------------------------------	------------------

# Converter - FB-HSB-DP/PA - 2316370

## Technical data

### Ambient conditions

Ambient temperature (storage/transport)	-20 °C ... 60 °C
Degree of protection	IP20

### General

Mounting position	On horizontal DIN rail NS 35 in acc. with EN 60715
Net weight	882.4 g
Color	green
UL, USA/Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142

### Power supply

Supply voltage range	10.8 V DC ... 26.4 V DC
Max. current consumption	800 mA
Conductor cross section flexible max.	2.50 mm <sup>2</sup>
Conductor cross section flexible min.	0.20 mm <sup>2</sup>
Conductor cross section solid max.	2.50 mm <sup>2</sup>
Conductor cross section solid min.	0.20 mm <sup>2</sup>
Conductor cross section AWG max.	12
Conductor cross section AWG min.	24

### Serial interface

Interface 1	Ethernet
Interface	10/100 Mbps Ethernet
Number of connections	1
Connection method	RJ45
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12


### Standards and Regulations

UL, USA/Canada	UL 508 Listed
UL, Canada	CSA C22.2 No. 142

## Drawings

## Converter - FB-HSB-DP/PA - 2316370

Dimensional drawing

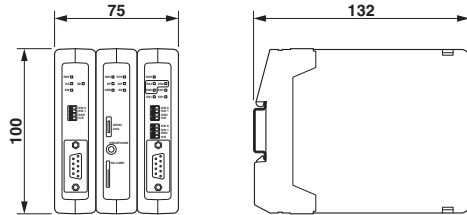

### Articles in set

Repeater - FB-DP-RPTR - 2316373



PROFIBUS DP interface/repeater module

Repeater - FB-PA/SC - 2316375



PROFIBUS PA interface module with oscilloscope

Converter - FB-HSB - 2316379



Head station for monitoring one PROFIBUS network

### Classifications

eCl@ss

eCl@ss 5.1	27242208
eCl@ss 6.0	27242208
eCl@ss 8.0	27242608
eCl@ss 9.0	27242608

# Converter - FB-HSB-DP/PA - 2316370

## Classifications

### ETIM

ETIM 5.0	EC001604
ETIM 6.0	EC001604

### UNSPSC

UNSPSC 13.2	32151602
-------------	----------

## Accessories

### Accessories

#### Device coupler

#### Repeater - FB-DP-RPTR - 2316373



PROFIBUS DP interface/repeater module

---

#### Repeater - FB-DP-RPTR/SC - 2316374



PROFIBUS DP interface/repeater module with oscilloscope functionality

---

#### Repeater - FB-PA/SC - 2316375



PROFIBUS PA interface module with oscilloscope

---

#### Converter - FB-HSC - 2316371



Head station for monitoring up to four PROFIBUS networks

## Converter - FB-HSB-DP/PA - 2316370

### Accessories

---

---

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>