

## Surge protection device - C-UFB- 5DC/E - 2782300

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Attachment plug with surge voltage coarse and fine protection, for coaxial signal interfaces with floating shield, signal voltage 5 V. Connection: BNC socket/plug

### Product Features

- Ground connection via separately led cable
- For insertion in the cable



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 069445
Weight per Piece (excluding packing)	114.0 g
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	93 mm
Width	25.4 mm
Length	25.4 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

#### General

Housing material	Aluminum
Color	black

## Surge protection device - C-UFB- 5DC/E - 2782300

### Technical data

#### General

Standards for clearances and creepage distances	VDE 0110-1
	IEC 60664-1
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Direction of action	Line-Shield/Earth Ground

#### Protective circuit

IEC test classification	C2
	C3
	D1
Maximum continuous voltage $U_C$	5 V DC
Maximum continuous voltage $U_C$ (wire-ground)	5 V DC
Maximum continuous voltage $U_C$ (wire-shield)	5 V DC
Nominal current $I_N$	185 mA (25 °C)
Operating effective current $I_C$ at $U_C$	$\leq 300 \mu\text{A}$
Residual current $I_{PE}$	$\leq 2 \mu\text{A}$
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (Core-Earth)	10 kA
Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (Core-Shield)	10 kA
Total surge current (8/20) $\mu\text{s}$	20 kA
Output voltage limitation at 1 kV/ $\mu\text{s}$ (Core-Earth) spike	$\leq 500 \text{ V}$
Output voltage limitation at 1 kV/ $\mu\text{s}$ (Core-Shield) spike	$\leq 35 \text{ V}$
Output voltage limitation at 1 kV/ $\mu\text{s}$ (Core-Shield) static	$\leq 15 \text{ V}$
Residual voltage at $I_n$ (conductor-shield)	$\leq 10 \text{ V}$
Voltage protection level $U_p$ (core-ground)	$\leq 500 \text{ V}$ (C1 - 1 kV/500 A)
	$\leq 500 \text{ V}$ (C3 - 10 A)
Voltage protection level $U_p$ (core-shield)	$\leq 55 \text{ V}$ (C1 - 1 kV/500 A)
	$\leq 25 \text{ V}$ (C3 - 10 A)
Response time $t_A$ (Core-Earth)	$\leq 100 \text{ ns}$
Response time $t_A$ (Core-GND)	$\leq 500 \text{ ns}$
Input attenuation aE, asym.	typ. 2 dB ( $\leq 20 \text{ MHz}$ )
Cut-off frequency $f_g$ (3 dB), asym. (shield) in 50 Ohm system	typ. 90 MHz
Impulse durability (conductor-ground)	C2 - 10 kV/5 kA
	D1 - 2,5 kA

#### Connection data

Connection method	BNC 50 $\Omega$
Connection type IN	BNC socket
Connection type OUT	BNC plug

## Surge protection device - C-UFB- 5DC/E - 2782300

### Technical data

#### Connection, equipotential bonding

Connection method	PVC litz wire
-------------------	---------------

#### Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

### Classifications

#### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

#### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

#### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

### Approvals

#### Approvals

---

Approvals

EAC

---

# Surge protection device - C-UFB- 5DC/E - 2782300

## Approvals

Ex Approvals

---

Approvals submitted


---

Approval details


EAC
-----

## Drawings

Dimensional drawing



Circuit diagram

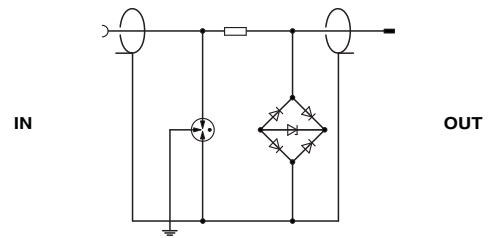

# Surge protection device - C-UFB- 5DC/E - 2782300

Diagram

